


AJ WALL

Designed by Arne Jacobsen

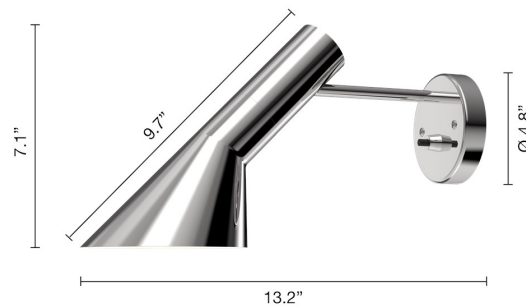

Description

The fixture emits downward directed light. The angle of the screen can be adjusted approximately 90 degrees up and down and 60 degrees to each side to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5743907274	WHT, 024	13.2 / 7.1 / - IN / 2.0 LB
5743907287	BLACK, 314	13.2 / 7.1 / - IN / 2.0 LB
5743907368	PALE PETROLEUM, 447	13.2 / 7.1 / - IN / 2.0 LB
5743914348	STAINL STEEL POLISH, 957	13.2 / 7.1 / - IN / 2.1 LB
5743915091	WHT, 024	13.2 / 7.1 / - IN / 2.0 LB
5743915101	BLACK, 314	13.2 / 7.1 / - IN / 2.0 LB
5743915185	PALE PETROLEUM, 447	13.2 / 7.1 / - IN / 2.0 LB
5743915224	STAINL STEEL POLISH, 957	- / - / - IN / 2.1 LB
5743917882	ELECTRIC ORANGE	- / - / - IN / 2.0 LB
5743917895	SOFT LEMON	- / - / - IN / 2.0 LB
5743917905	WARM SAND	- / - / - IN / 2.0 LB
5743917918	DUSTY BLUE	- / - / - IN / 2.0 LB
5743917921	WARM GREY	- / - / - IN / 2.0 LB
5743917934	ELECTRIC ORANGE	- / - / - IN / 2.0 LB
5743917947	SOFT LEMON	- / - / - IN / 2.0 LB
5743917950	WARM SAND	- / - / - IN / 2.0 LB
5743917963	DUSTY BLUE	- / - / - IN / 2.0 LB
5743917976	WARM GREY	- / - / - IN / 2.0 LB

Materials & Finishes

MATERIALS

Shade: Spun steel or stainless steel. Wall box: Spun steel or deep drawn stainless steel. Arm: Steel or stainless steel.

FINISHES

White, Black, Pale Petroleum, Warm Sand, Soft Lemon, Electric Orange, Dusty Blue, Warm Grey, Stainless Steel Polished.

Mounting


Mounted directly to finished surface over a 4" octagonal junction-box. On/off switch on the wall plate, white for white finish, black for non-white finishes. Variants without on/off switch to be remotely controlled. For mounting instructions, see download section on the product detail page.

Information


Electrical:
Wattage: 10W
Delivered lumens: 263
Efficacy: 26.3 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Controllability: Phase Dimming
Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

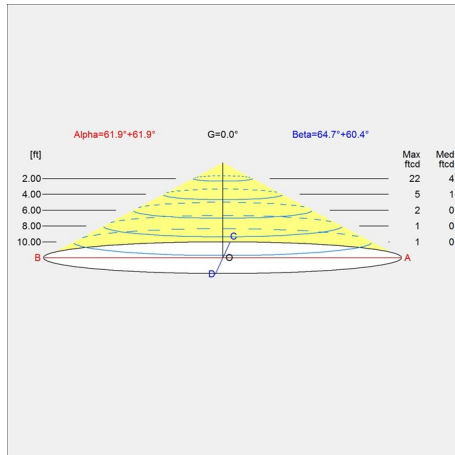

ISOLUX

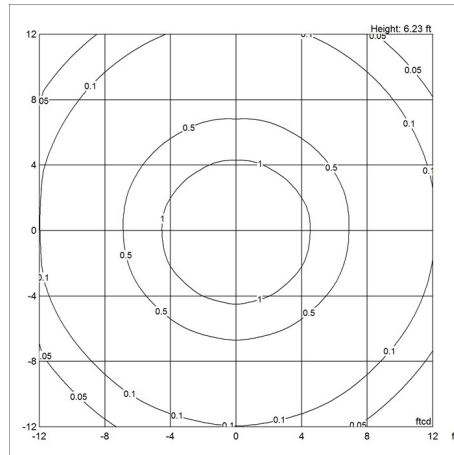

POLAR

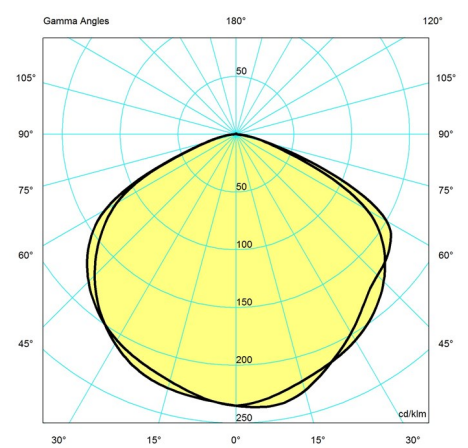

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5743907274	1x10W G16.5/candelabra	120V	263	-	Without cord
5743907287	1x10W G16.5/candelabra	120V	263	-	Without cord
5743907368	1x10W G16.5/candelabra	120V	263	-	Without cord
5743914348	1x10W G16.5/candelabra	120V	263	-	Without cord
5743915091	1x10W G16.5/candelabra	120V	263	-	Without cord
5743915101	1x10W G16.5/candelabra	120V	263	-	Without cord
5743915185	1x10W G16.5/candelabra	120V	263	-	Without cord
5743915224		120V		-	Without cord
5743917882		120V		-	Without cord
5743917895		120V		-	Without cord
5743917905		120V		-	Without cord
5743917918		120V		-	Without cord
5743917921		120V		-	Without cord
5743917934		120V		-	Without cord
5743917947		120V		-	Without cord
5743917950		120V		-	Without cord
5743917963		120V		-	Without cord
5743917976		120V		-	Without cord