

## CIRQUE

Designed by Clara von Zweigbergk



### Description

The fixture provides a downward glare-free soft light by means of the white lacquered inner reflector.

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741919772	COPPER, 928	15 / 18.8 / 15 IN / 9.2 LB
5741919785	RED, 078	15 / 18.8 / 15 IN / 4.9 LB
5741919798	YELLOW, 074	15 / 18.8 / 15 IN / 4.9 LB
5741919808	COPPER, 928	8.7 / 11.6 / 8.7 IN / 4.2 LB
5741919811	RED, 078	8.7 / 11.6 / 8.7 IN / 2.6 LB
5741919824	YELLOW, 074	8.7 / 11.6 / 8.7 IN / 2.6 LB
5741919837	COPPER, 928	5.9 / 7.4 / 5.9 IN / 3.0 LB
5741919840	RED, 078	5.9 / 7.4 / 5.9 IN / 1.9 LB
5741919853	YELLOW, 074	5.9 / 7.4 / 5.9 IN / 1.9 LB
5741919895	GREY, 366	15 / 18.8 / 15 IN / 4.9 LB
5741919905	GREY, 366	8.7 / 11.6 / 8.7 IN / 4.2 LB
5741919918	GREY, 366	5.9 / 7.4 / 5.9 IN / 1.9 LB

### Materials & Finishes

#### MATERIALS

Shield: Drawn aluminum.

## FINISHES

Grey top, Copper top, Red top, Yellow top, wet painted.

## Mounting


Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

## Information


Electrical:  
 System Wattage: 10W or 22W  
 LED Wattage: 9 W or 20 W  
 Delivered lumens: 356 - 832  
 Efficacy: 35.6 lm/W - 37.8 lm/W  
 Certifications:  
 cULus, Dry Location  
 Protection class IP20  
 Controllability: Phase dimming  
 Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

## Light distribution diagrams


### CARTESIAN

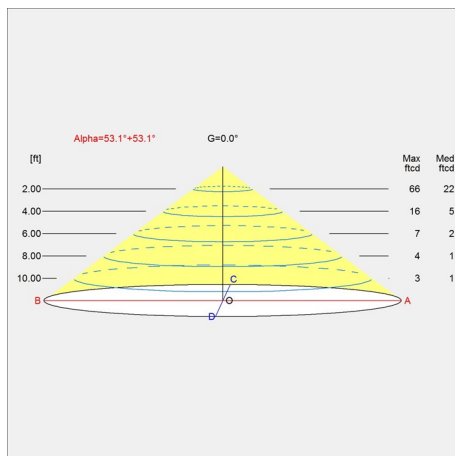

### ISOLUX

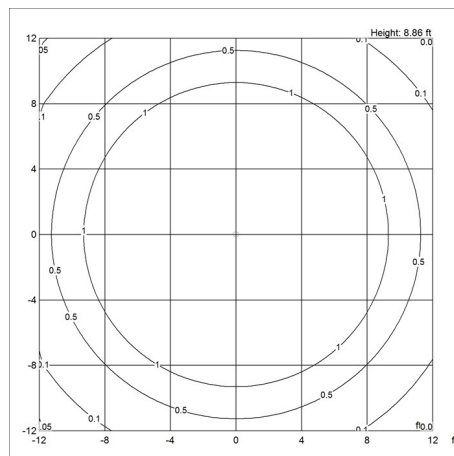

### POLAR

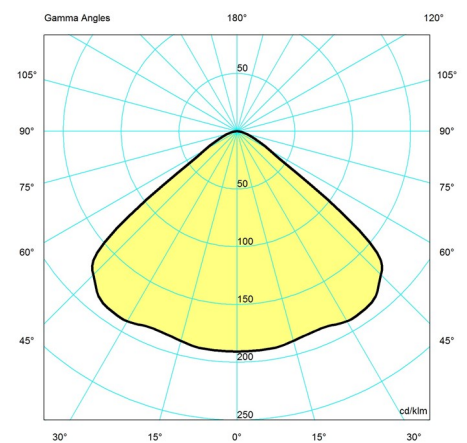

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

### VARIANT NO.

5741919772

### LIGHT SOURCE

1x22W A-21/medium

### VOLTAGE/FRQ

120V

### LUMEN

775

### FEATURES

-

### CABLE

White fabric cord

# louis poulsen

5741919785	1x22W A-21/medium	120V	775	-	White fabric cord
5741919798	1x22W A-21/medium	120V	775	-	White fabric cord
5741919808	1x15W A-19/medium	120V	705	-	White fabric cord
5741919811	1x15W A-19/medium	120V	705	-	White fabric cord
5741919824	1x15W A-19/medium	120V	705	-	White fabric cord
5741919837	1x10W A-15/medium	120V	436	-	White fabric cord
5741919840	1x10W A-15/medium	120V	436	-	White fabric cord
5741919853	1x10W A-15/medium	120V	436	-	White fabric cord
5741919895	1x22W A-21/medium	120V	775	-	White fabric cord
5741919905	1x15W A-19/medium	120V	705	-	White fabric cord
5741919918	1x10W A-15/medium	120V	436	-	White fabric cord

---

## Specification Notes

- a. 5.9 IN size available only in 10W/A-15/medium.
- b. 8.7 IN size available only in 15W/A-19/medium.
- c. 15 IN size available only in 22W/A-21/medium.