


## ENIGMA 825

Designed by Shoichi Uchiyama

---

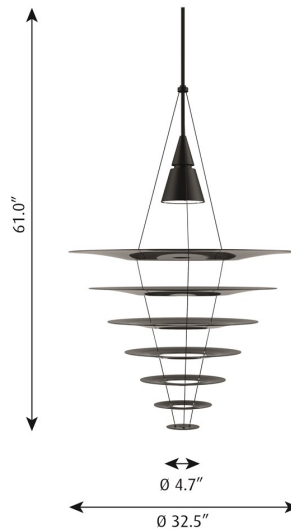

---

### Description

The fixture emits glare-free, soft, comfortable, downward light. The shade design ensures even illumination of the surface. The matte upper surface diffuses the light, while the glossy lower surface ensures optimal reflection.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741918757	BLK, 369	32.5 / 61 / 32.5 IN / 23.5 LB
5741918760	BR ALU, 184	32.5 / 61 / 32.5 IN / 19.9 LB

---

### Materials & Finishes

#### MATERIALS

Cone and pendant tube: Wet painted brushed aluminum. Wire: Stainless steel. Shades: Acrylic.

#### FINISHES

Aluminum colored or black, wet painted brushed aluminum. Shades: White or black acrylic.

---

# louis poulsen

## Mounting


Suspension type: 1x stainless steel aircraft cable. Canopy: White or black. Cord type: 2-conductor, 18 AWG white or black PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

## Information


Electrical:  
 System Wattage: 62W  
 LED Wattage: 57 W  
 Delivered lumens: 3,401 - 5,883  
 Efficacy: 54.9 lm/W - 94.9 lm/W  
 Certifications:  
 cULus, Damp Location  
 Protection class IP20  
 Controllability: 0-10V Dimming  
 Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

## Light distribution diagrams


### CARTESIAN

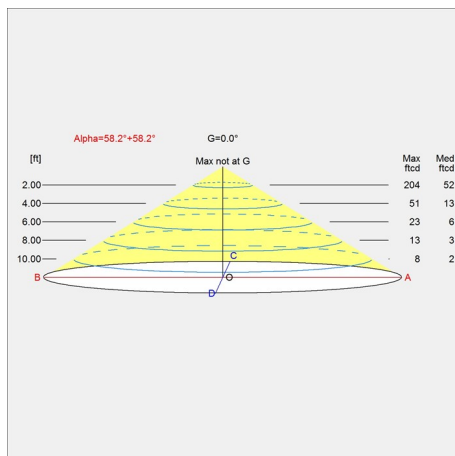

### ISOLUX

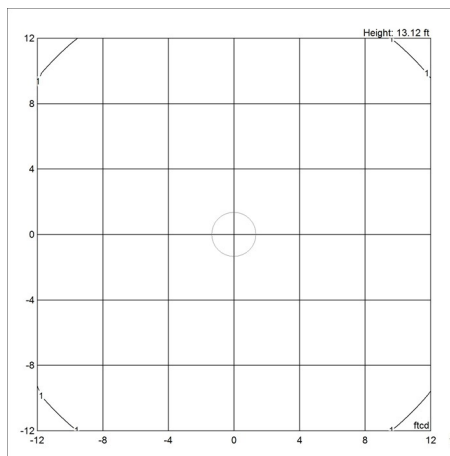

### POLAR

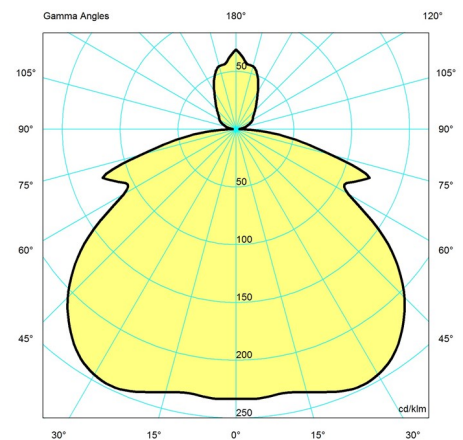

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741918757	LED 3000K 62W	120-277V/60HZ	3401	Dim 0-10v	Blk
5741918760	LED 3000K 62W	120-277V/60HZ	3401	Dim 0-10v	Transparent cable