


FLINDT WALL

Project name:

Project type:

Notes:

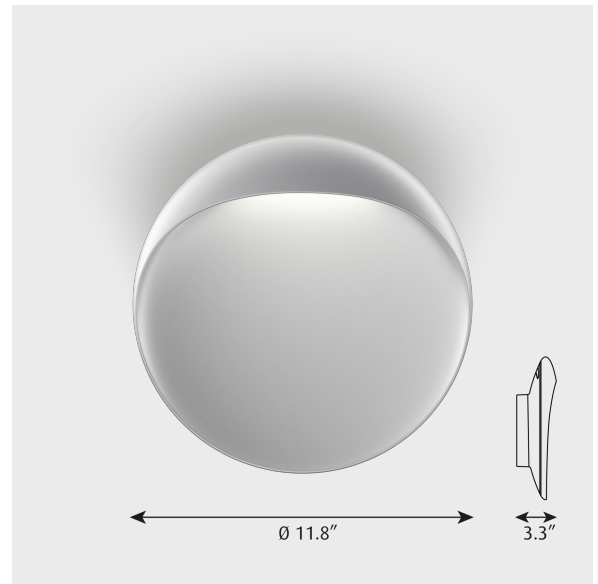

Design

Christian Flindt

Product description

Beautifully sculpted circular wall-mounted fixture that provides carefully crafted illumination for outdoor and indoor spaces. The gentle direct light illuminates the lunar like glowing disk with a gentle (top) back light which adds a layered depth. The Flindt Wall is complimented by the Flindt Bollard which provide a widely spaced pathway illumination.

Variant options

Dimension	Color	Light source	Lumen	Voltage frequency	Lighting control
11.8 IN	<input type="radio"/> Black texture <input type="radio"/> Corten color <input type="radio"/> Natural paint aluminum <input type="radio"/> White texture	-	-	120-277V/60HZ	Dim 0-10v
15.7 IN		LED 2700K 10W	1020		Phase dimming (mains dimm)
7.9 IN		LED 2700K 30W	1052		
		LED 3000K 10W	326		
		LED 3000K 30W	336		
			359		
			371		
			449		
			463		
			494		
			495		
			509		
			510		
			680		
			701		
			751		
			774		

Specification notes

Specification sheet

a. 7.9 IN only available with 10W LED/DIM PHASE+0-10V. (Phase dimming only with 120V supply). b. 11.8 IN and 15.7 IN only available with 30W LED/120-277V/DIM 0-10V.

2/4
Flindt Wall

Light description

The luminaire emits glare-free light. Concealed direct light reflects off of the front surface as well as upwards onto the wall surface. Available in 2700K or 3000K, additional CCT may be available. 7.9 in., 11.9 in. and 15.7 in. diameter fixtures available with 0-10V dimming (7.9in is also available with phase dimming at 120V).

Mounting

Mounted directly to finished surface over a recessed junction box. Mounting hardware by others. Location of junction box is offset from center of fixture. Anchor locations differ by fixture size. Refer to mounting instructions for further information.

Information

Electrical:
System Wattage: 10 - 30 W
LED Wattage: 9 - 28 W
Delivered lumens: 336 lm - 1,052 lm
Efficacy: 33.6 - 35.1 lm/W
Certifications:
cULus, Wet Location
Protection class IP65
IK class 08 (7.9IN); 09 (11.8IN & 15.7IN)
BUG Rating: B0-U3-G1
Controllability: 0-10V Dimming
Min.-Max. Ambient Temp: -20°C to +40°C
Color Rendering: Ra≥90

Other functions

LED in 2700K, 3500K, 4000K, 5000K, or 5700K. Amber LED available for sea turtle nesting areas. Custom finishes. Alternative dimming controls.

Specification notes

- a. 7.9 IN only available with DIM PHASE+0-10V.
- b. 11.8 IN and 15.7 IN only available with DIM 0-10V.

Material

Front and back housing: Die cast aluminum, minimum 0. 1" thick. Lens: Injection molded U. V. and weather resistant clear acrylic, 0. 12" thick. Standard finish are matte, textured surface powder coat with minimum 2 mils thickness in corten color, natural painted aluminum, or white.

Weight

Min: 14.808 lbs Max: 8.488 lbs

Dimensions

11.8 IN, 15.7 IN, 7.9 IN

























Finish

Black texture, Corten color, Natural paint aluminum, White texture

Voltage

120-277V/60HZ

Variant options

Dimension	Color	Light source	Lumen	Voltage frequency	Lighting control	Variant number
11.8 IN	 Natural paint aluminum	LED 3000K 30W	510	120-277V/60HZ	Dim 0-10v	5747912757
7.9 IN	 Natural paint aluminum	LED 2700K 10W	359	120-277V/60HZ	Phase dimming (mains dimm)	5747912621
7.9 IN	 Natural paint aluminum	LED 3000K 10W	371	120-277V/60HZ	Phase dimming (mains dimm)	5747912634
7.9 IN	 Corten color	LED 2700K 10W	326	120-277V/60HZ	Phase dimming (mains dimm)	5747912663
7.9 IN	 Corten color	LED 3000K 10W	336	120-277V/60HZ	Phase dimming (mains dimm)	5747912676
7.9 IN	 White texture	LED 2700K 10W	494	120-277V/60HZ	Phase dimming (mains dimm)	5747912702
7.9 IN	 White texture	LED 3000K 10W	509	120-277V/60HZ	Phase dimming (mains dimm)	5747912715
11.8 IN	 Natural paint aluminum	LED 2700K 30W	495	120-277V/60HZ	Dim 0-10v	5747912744
11.8 IN	 Corten color	LED 2700K 30W	449	120-277V/60HZ	Dim 0-10v	5747912786
11.8 IN	 Corten color	LED 3000K 30W	463	120-277V/60HZ	Dim 0-10v	5747912799
11.8 IN	 White texture	LED 2700K 30W	680	120-277V/60HZ	Dim 0-10v	5747912825
11.8 IN	 White texture	LED 3000K 30W	701	120-277V/60HZ	Dim 0-10v	5747912838
15.7 IN	 Natural paint aluminum	LED 2700K 30W	751	120-277V/60HZ	Dim 0-10v	5747912867
15.7 IN	 Natural paint aluminum	LED 3000K 30W	774	120-277V/60HZ	Dim 0-10v	5747912870
15.7 IN	 Corten color	LED 2700K 30W	680	120-277V/60HZ	Dim 0-10v	5747912906
15.7 IN	 Corten color	LED 3000K 30W	701	120-277V/60HZ	Dim 0-10v	5747912919
15.7 IN	 White texture	LED 2700K 30W	1020	120-277V/60HZ	Dim 0-10v	5747912948
15.7 IN	 White texture	LED 3000K 30W	1052	120-277V/60HZ	Dim 0-10v	5747912951
7.9 IN	 Black texture	-	-	120-277V/60HZ	Phase dimming (mains dimm)	5747930276
7.9 IN	 Black texture	-	-	120-277V/60HZ	Phase dimming (mains dimm)	5747930289
11.8 IN	 Black texture	-	-	120-277V/60HZ	Dim 0-10v	5747930315
11.8 IN	 Black texture	-	-	120-277V/60HZ	Dim 0-10v	5747930328
15.7 IN	 Black texture	-	-	120-277V/60HZ	Dim 0-10v	5747930357
15.7 IN	 Black texture	-	-	120-277V/60HZ	Dim 0-10v	5747930360