

MOSER

Designed by Anu Moser



Description

The fixture emits diffused light and the thickness of the glass results in a very comfortable light distribution.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741913024	MATTE OPAL GLASS, 983	7.3 / 10 / 7.3 IN / 2.8 LB
5741913037	MATTE OPAL GLASS, 983	8.1 / 11.2 / 8.1 IN / 3.3 LB
5741913040	MATTE OPAL GLASS, 983	9.8 / 14.1 / 9.8 IN / 4.2 LB

Materials & Finishes

MATERIALS

Suspension: Polished aluminum. Shade: hand blown matte white opal glass.

FINISHES

Matte white opal.

Mounting


Canopy: White. Cord type: 3-conductors, 18 AWG white PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

Information


Electrical:
 System Wattage: 15W
 LED Wattage: 14 W
 Delivered lumens: 664
 Efficacy: 44.3 lm/W
 Certifications:
 cULus, Dry Location
 Protection class IP20
 Controllability: Phase dimming
 Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

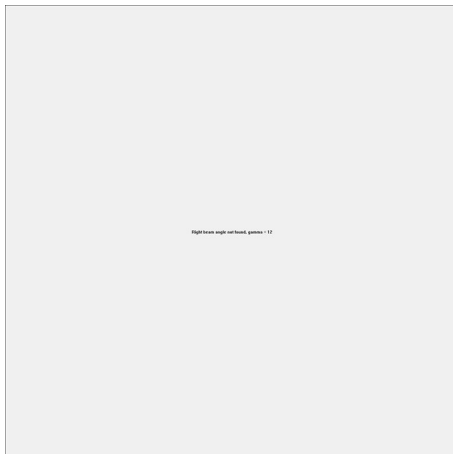

ISOLUX

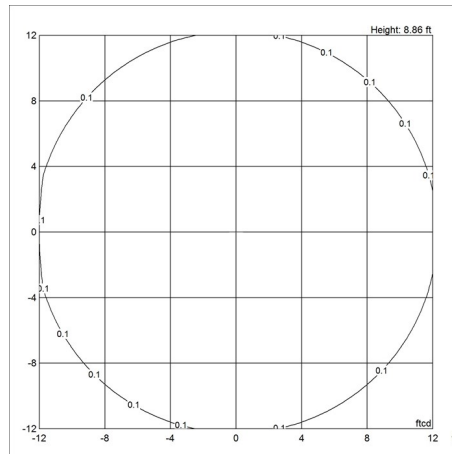

POLAR

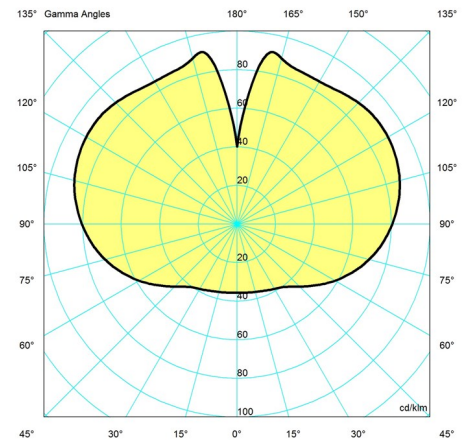

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741913024	1x15W A-19/medium	120V	664	-	-
5741913037	1x15W A-19/medium	120V	664	-	-
5741913040	1x15W A-19/medium	120V	664	-	-

Specification Notes

- Incandescent and LED light sources only available in 120V.
- 15W LED light source only available in 7.3" or 8.1" dimension.
- 22W LED light source only available in 9.8" dimension.

d. 22W LED light source only available in 9.8" dimension.
