

NJP TABLE

Designed by nendo



Description

The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000133058	BLK, 617	8.7 / 17.7 / - IN / 11.3 LB
10000133059	BLK, 617	5.9 / 17.7 / - IN / 3.0 LB
10000133060	BLK, 617	5.9 / 17.7 / - IN / 2.7 LB
10000133061	WHT, 062	8.7 / 17.7 / - IN / 11.3 LB
10000133062	WHT, 062	5.9 / 17.7 / - IN / 2.9 LB
10000133063	WHT, 062	5.9 / 17.7 / - IN / 2.7 LB
10000133064	BLK, 617	8.7 / 17.7 / - IN / 11.3 LB
10000133065	BLK, 617	5.9 / 17.7 / - IN / 2.9 LB
10000133066	BLK, 617	5.9 / 17.7 / - IN / 2.7 LB
10000133067	WHT, 062	8.7 / 17.7 / - IN / 11.3 LB
10000133068	WHT, 062	5.9 / 17.7 / - IN / 2.9 LB
10000133069	WHT, 062	5.9 / 17.7 / - IN / 2.7 LB
10000138372	LIGHT ALU GREY, T06	5.9 / 17.7 / - IN / 11.3 LB
10000138373	LIGHT ALU GREY, T06	5.9 / 17.7 / - IN / 2.9 LB
10000138374	LIGHT ALU GREY, T06	5.9 / 17.7 / - IN / 2.7 LB

louis poulsen

10000138375	DARK ALU GREY, T07	5.9 / 17.7 / - IN / 11.3 LB
10000138376	DARK ALU GREY, T07	5.9 / 17.7 / - IN / 2.9 LB
10000138377	DARK ALU GREY, T07	5.9 / 17.7 / - IN / 2.7 LB
10000142404	LIGHT ALU GREY, T06	8.7 / 17.7 / 8.7 IN / 11.3 LB
10000142405	LIGHT ALU GREY, T06	5.9 / 17.7 / 5.9 IN / 2.9 LB
10000142406	LIGHT ALU GREY, T06	5.9 / 17.7 / 5.9 IN / 2.7 LB

Materials & Finishes

MATERIALS

Base: Steel. Arms and lamp head: Aluminum. Joints: Anodized aluminum.

FINISHES


White, Black or Light Aluminium Grey, powder coated.

Mounting


Cord type: White (White finish), black (non-white finish). Cord length: 6'. Switch: High/low/off button on the fixture head. Timer function: 4 hours or 8 hours. LED driver: Separate, plugs into power outlet. For mounting instructions, see download section on the product detail page.

Light distribution diagrams





CARTESIAN

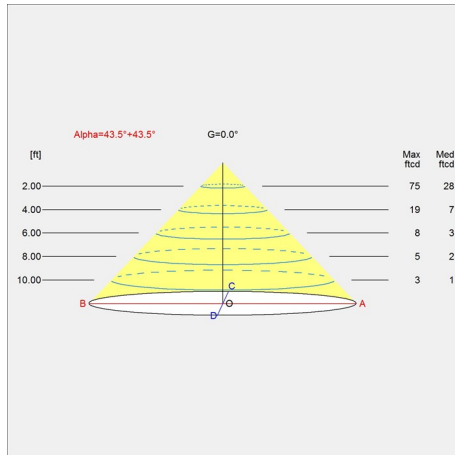

ISOLUX

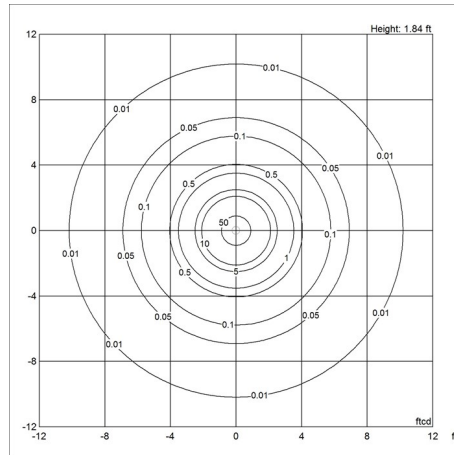

POLAR

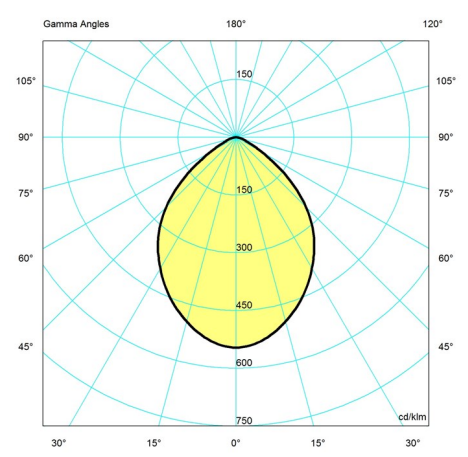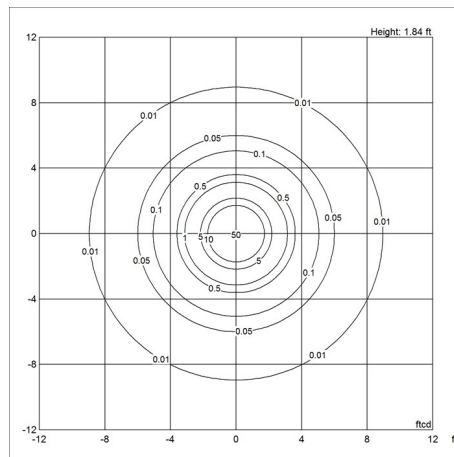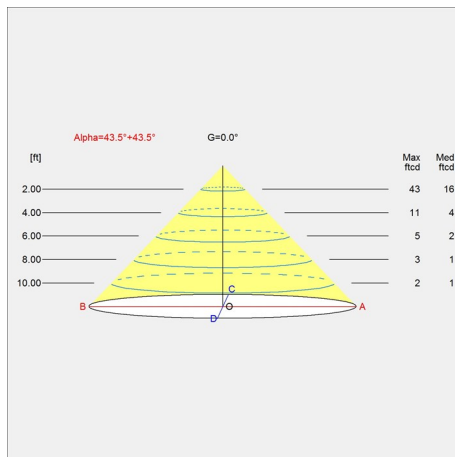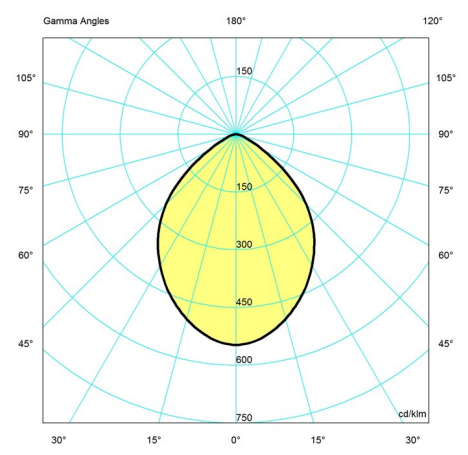

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000133058	LED 2700K 10W	120V	529	-	-
10000133059	LED 2700K 10W	120V	529	-	-
10000133060	LED 2700K 10W	120V	529	-	-
10000133061	LED 2700K 10W	120V	529	-	-
10000133062	LED 2700K 10W	120V	529	-	-
10000133063	LED 2700K 10W	120V	529	-	-
10000133064	LED 3000K 10W	120V	550	-	-
10000133065	LED 3000K 10W	120V	550	-	-
10000133066	LED 3000K 10W	120V	550	-	-
10000133067	LED 3000K 10W	120V	550	-	-
10000133068	LED 3000K 10W	120V	550	-	-

louis poulsen

10000133069	LED 3000K 10W	120V	550	-	-
10000138372	LED 3000K 10W	120V	550	-	-
10000138373	LED 3000K 10W	120V	550	-	-
10000138374	LED 3000K 10W	120V	550	-	-
10000138375	LED 3000K 10W	120V	550	-	-
10000138376	LED 3000K 10W	120V	550	-	-
10000138377	LED 3000K 10W	120V	550	-	-
10000142404	LED 2700K 10W	120V	529	-	-
10000142405	LED 2700K 10W	120V	529	-	-
10000142406	LED 2700K 10W	120V	529	-	-
