


TOLDBOD 6.1 WALL

Designed by Louis Poulsen A/S

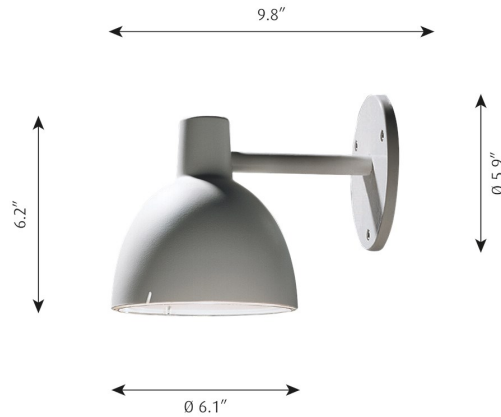

Description

The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5743911723	NAT PAINT ALU, 162	6.1 / 6.2 / 10.5 IN / 2.6 LB
5743911736	BLK, 723	6.1 / 6.2 / 10.5 IN / 2.6 LB

Materials & Finishes

MATERIALS

Shield: Tempered sand blasted glass. Wall plate: Die cast aluminum. Luminaire head: Die cast aluminum. Arm: Extruded aluminum.

FINISHES

Black or natural painted aluminum, powder coated.

Mounting

Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box. For mounting instructions, see download section on the product detail page.

Information

Electrical:
System Wattage: 10 W
Delivered lumens: 189 lm
Efficacy: 18.9 lm/W
Certifications:
cULus, Wet Location
Protection class IP44
IK class 05
BUG Rating: B1-U2-G1
Controllability: Phase dimming
Min.-Max. Ambient Temp: -20°C to +40°C
Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams

CARTESIAN

ISOLUX

POLAR

BUG

□

□

□

□

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5743911723	1x10W G16.5/IF Candelabra US	120V	2093	-	-
5743911736	1x10W G16.5/IF Candelabra US	120V	2093	-	-
