

TOLDBOD PENDANT

Designed by Louis Poulsen A/S



Description

The pendant emits soft downwards directed light. The matte, white-painted inside of the elliptical shade helps to assure even distribution of the light.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000149809	BLK, 369	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149810	LIGHT GREY, 435	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149811	BLUE-GREY, 433	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149813	WHT, 349	6.7 / 6.8 / 6.7 IN / 2.1 LB
10000149814	BLK, 369	9.8 / 10 / 9.8 IN / 3.1 LB
10000149815	LIGHT GREY, 435	9.8 / 10 / 9.8 IN / 3.1 LB
10000149816	BLUE-GREY, 433	9.8 / 10 / 9.8 IN / 3.1 LB
10000149818	WHT, 349	9.8 / 10 / 9.8 IN / 3.1 LB
10000149819	BLK, 369	15.7 / 16 / 15.7 IN / 7.5 LB
10000149820	WHT, 349	15.7 / 16 / 15.7 IN / 7.5 LB
10000149900	BLK, 369	4.7 / 4.8 / 4.7 IN / 1.2 LB
10000149901	LIGHT GREY, 435	4.7 / 4.8 / 4.7 IN / 1.2 LB
10000149902	BLUE-GREY, 433	4.7 / 4.8 / 4.7 IN / 1.2 LB
10000149904	WHT, 349	4.7 / 4.8 / 4.7 IN / 1.2 LB

louis poulsen

Materials & Finishes

MATERIALS

Shade: Spun aluminum.
4.7" reflector: Spun white matte coated aluminum.
14.7" diffuser: Matte acrylic

FINISHES

Black, White, Light Grey or Blue-Grey, matte powder coated.

Mounting


Canopy: White. Cord type: 18 AWG fabric covered power cord. Black cord for black, and blue-grey pendants, white cord for white and light grey pendants. 14.7" come with 1x stainless steel aircraft cable. Cord length: 12'. For mounting instructions, see download section on the product detail page.

Information


Electrical:
System Wattage: 4W or 15W
LED Wattage: 4 W or 13 W
Delivered lumens: 144 - 637
Efficacy: 36 - 42 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Controllability: Phase dimming
Actual performance dependent upon screw-base lamp used.
For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

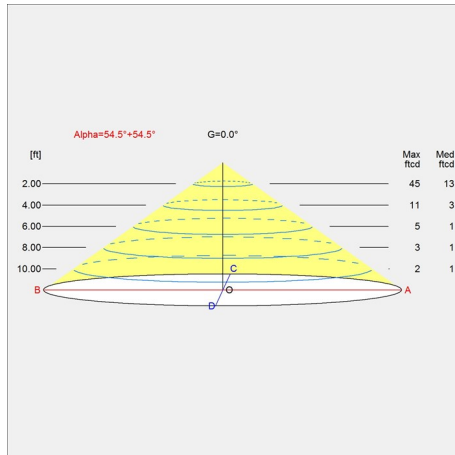

ISOLUX

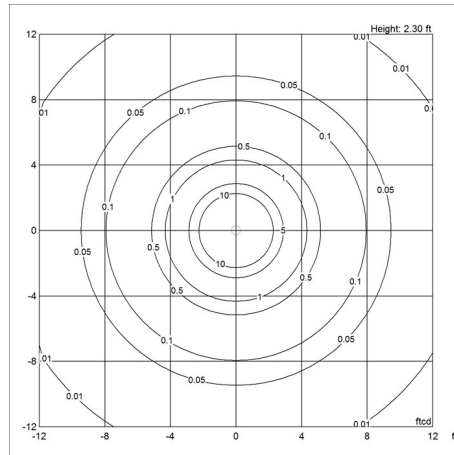

POLAR

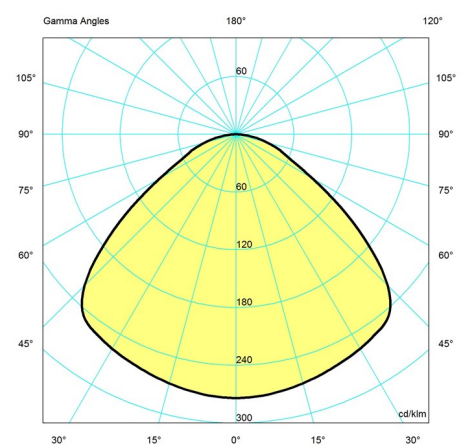

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000149809	1x10W G16.5/candelabra	120V	508	-	Black fabric cord
10000149810	1x10W G16.5/candelabra	120V	508	-	White fabric cord
10000149811	1x10W G16.5/candelabra	120V	508	-	Black fabric cord
10000149813	1x10W G16.5/candelabra	120V	508	-	White fabric cord
10000149814	1x10W A-15/medium	120V	656	-	Black fabric cord
10000149815	1x10W A-15/medium	120V	656	-	White fabric cord
10000149816	1x10W A-15/medium	120V	656	-	Black fabric cord
10000149818	1x10W A-15/medium	120V	656	-	White fabric cord
10000149819	1x15W A-19/medium	120V	637	-	Black fabric cord
10000149820	1x15W A-19/medium	120V	637	-	White fabric cord
10000149900	1x4W T-4 G9	120V	287	-	Black fabric cord
10000149901	1x4W T-4 G9	120V	287	-	White fabric cord
10000149902	1x4W T-4 G9	120V	287	-	Black fabric cord
10000149904	1x4W T-4 G9	120V	287	-	White fabric cord

Specification Notes

- a. 4.7 IN available only in 4W LED/T-4/G9.
- b. 6.7 IN available only in 10W LED/G16.5/candelabra.
- c. 9.8 IN available only in 10W LED/A-15/medium.
- d. 15.7 IN available only in 15W LED/A-19/medium.