


VL 56 PENDANT

Designed by Vilhelm Lauritzen

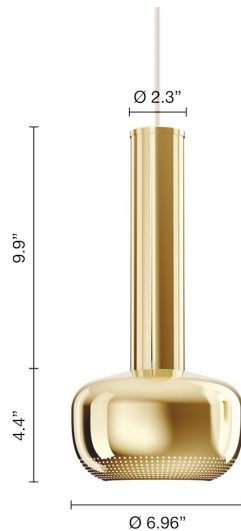

Description

The pendant emits downward directed glare-free light. The radial perforation pattern around the opening creates a softer transition between light and darkness. The perforations create a soft beautiful pattern of light both on the shade and on the surrounding surfaces.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741939927	BRASS, 935	7 / 4.4 / 7 IN / 3.3 LB
5741939972	CHR, 901	7 / 4.4 / 7 IN / 3.5 LB

Materials & Finishes

MATERIALS

Shade, tub and lid in polished untreated brass or chrome plated aluminium.

FINISHES

Polished brass or chrome. Wet painted white inner side.

Mounting

Cable 0,1"x0.7" (2 x 18) AWG SVT,

louis poulsen

White textile.
Cord length: 13,1"
Canopy: Yes. For mounting instructions, see download section on the product detail page.

Information

Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams

CARTESIAN

□

ISOLUX

□

POLAR

□

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741939927			369	-	White fabric cord
5741939972			369	-	White fabric cord
