



LINEAR CABLE SUSPENDED / SURFACE MOUNT

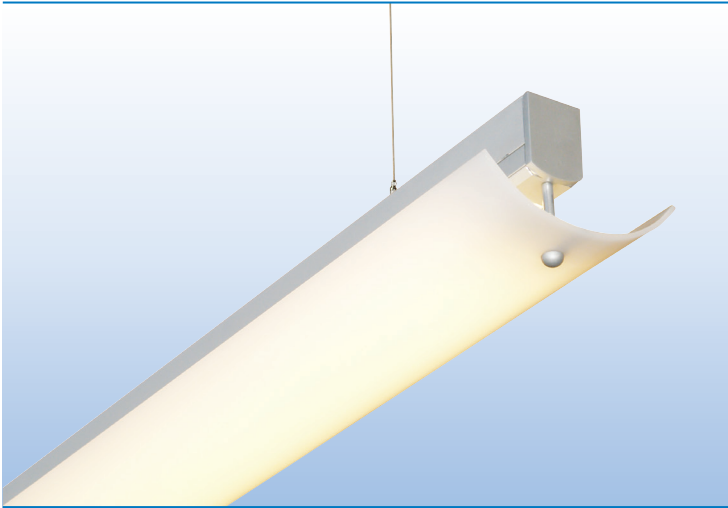

PROJECT:
TYPE:

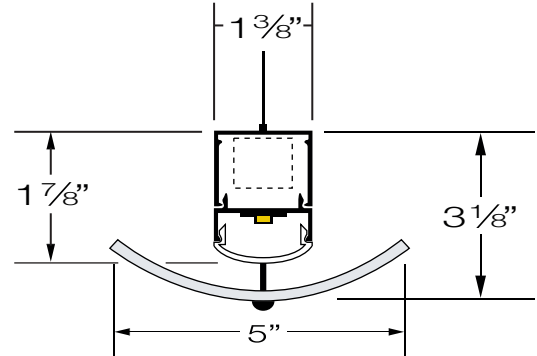

SPECIFICATIONS

HOUSING	Extruded aluminum housing up to 12' long.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
LENS	Extruded DR acrylic, snap-on frosted widespread lens.
REFLECTOR	Decorative curved reflectors: white acrylic or perforated aluminum with acrylic overlay diffuser.
LED DRIVER	Integral, universal voltage; 0-10V dimming standard; 1% or 10% dimming.
MOUNTING	SURFACE MOUNT: Mounting holes pre-drilled. See page 2 for details. CABLE SUSPENDED: Aircraft cable suspension kit (SK), canopy and prewired with 18/5 SVT cord.
LED's	60,000 hours. (L70), High uniformity, 80 CRI
CERTIFICATION	ETL/CSA listed for damp locations. 2001431 MADE IN THE USA

LED COLOR & LUMEN OPTIONS

4' – 24" BOARDS		LUMENS PER FOOT – WATTS PER FOOT – LUMENS PER WATT								
LED COLOR	CRI	LOW			MEDIUM			HIGH		
WHITE 2700K	80	500 L/FT	3.5 W/FT	136 L/W	870 L/FT	6.5 W/FT	130 L/W	1160 L/FT	9.0 W/FT	127 L/W
WHITE 3000K	80	530 L/FT	3.5 W/FT	144 L/W	915 L/FT	6.5 W/FT	137 L/W	1220 L/FT	9.0 W/FT	133 L/W
WHITE 3500K	80	535 L/FT	3.5 W/FT	144 L/W	920 L/FT	6.5 W/FT	137 L/W	1225 L/FT	9.0 W/FT	133 L/W
WHITE 4000K	80	560 L/FT	3.5 W/FT	151 L/W	970 L/FT	6.5 W/FT	145 L/W	1290 L/FT	9.0 W/FT	140 L/W


Higher lumen packages available.

PART NUMBER

SERIES	LUMENS	COLOR	VOLTS	REFLECTORS	MOUNTING	FINISH	LENGTH
ALX3-DR	L LOW	27K 2700K	UNV	WAR WHITE ACRYLIC	CABLE SUSPENDED SK36 36" CABLE KIT SK48 48" CABLE KIT SK72 72" CABLE KIT	S SATIN W WHITE C CUSTOM	4'
	M MEDIUM	3K 3000K	(120/277) 10% DIM	PARD PERFORATED AL. W/ DIFFUSER			8'
	H HIGH	35K 3500K					12'
	CP CUSTOM PROGRAMMED (Specify Lumens/FT or Watts/FT)	4K 4000K	UNV 1% (120/277) 1% DIM				
					SURFACE MOUNT SM SURFACE MOUNT JBP J BOX PLATE		


REFLECTOR OPTIONS

WAR WHITE ACRYLIC

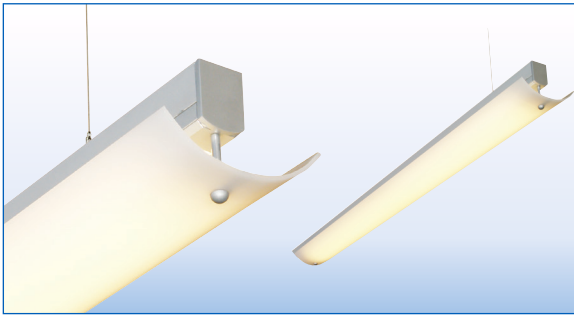


ENDVIEW


PARD PERFORATED ALUMINUM WITH DIFFUSER

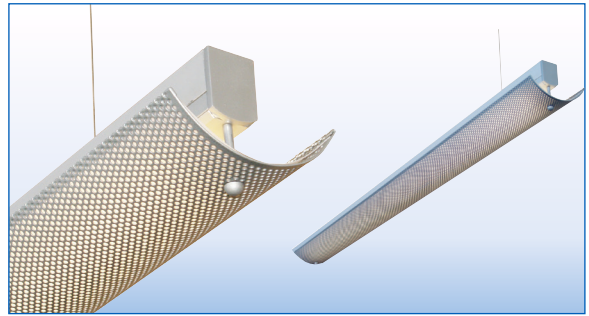


ENDVIEW

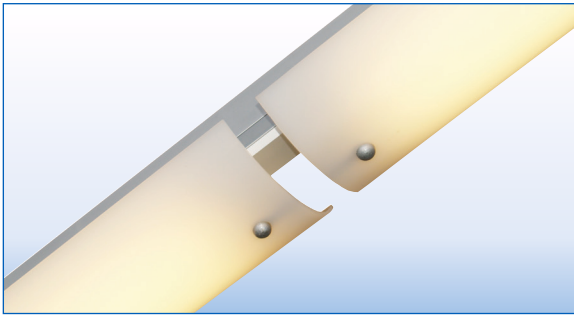


8' - 12' CENTER DETAIL VIEW 1

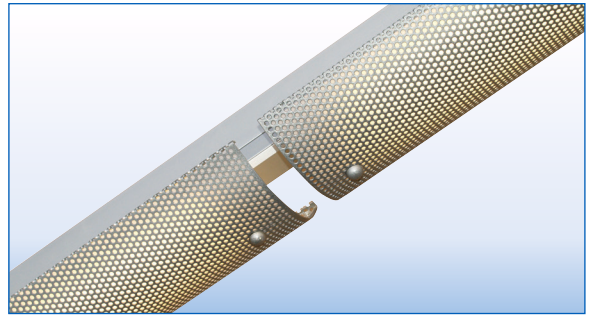

8' - 12' CENTER DETAIL VIEW 1

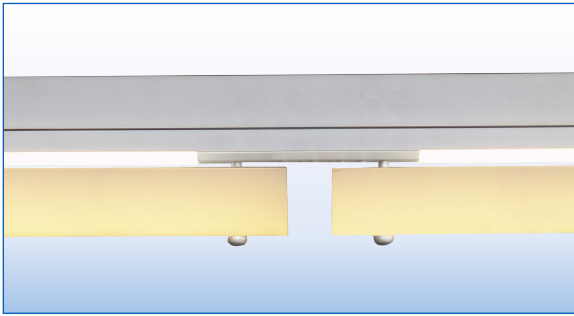

8' - 12' CENTER DETAIL VIEW 2

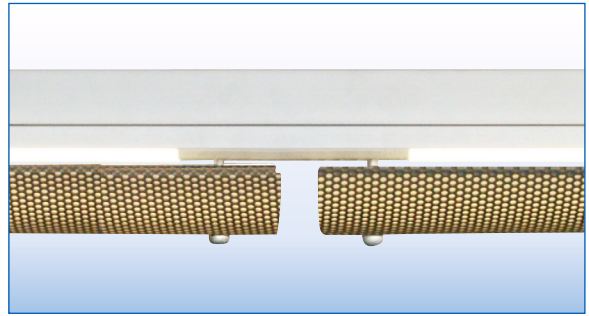

8' - 12' CENTER DETAIL VIEW 2


FIXTURE LENGTHS

NOMINAL LENGTH	4'	8'	12'
ACTUAL LENGTH	48"	97"	146"

Note: Reflector overhangs fixture 1" each end.

MOUNTING

CABLE SUSPENDED

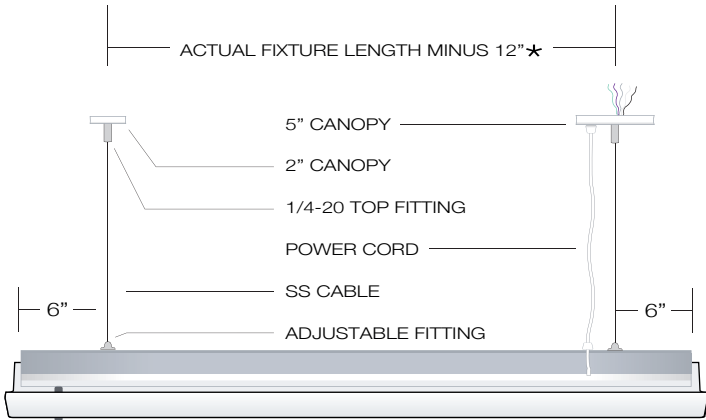


SK36 36" Suspension Kit
SK48 48" Suspension Kit
SK72 72" Suspension Kit
 Other cable lengths available.


Suspension Kit includes:
 (2) Top Fittings for 1/4-20 Rod
 (2) Adjustable Bottom Fittings
 (2) Aircraft Cables
 (1) Prewired 18/5 White SVT Cord
 (1) 5" White Canopy with Mounting Hardware
 (1) 2" White Canopy

- *Custom pendant spacing available; consult factory
- *Lengths over 8' require center cable support
- *EM option includes 18/6 cord

SURFACE MOUNT




WALL MOUNT




CEILING MOUNT

MOUNTING DETAILS

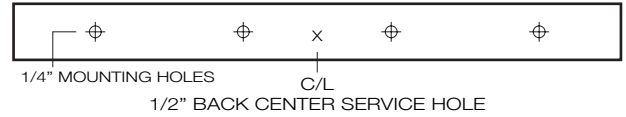

- 1/4" Mounting holes provided evenly spaced on back channel.
- 1/2" Back center service hole for snap-in connector provided for surface mount applications when using standard blank endcap or architectural endcap.
- 2' fixtures require off center service hole due to 12" driver


Note: Narrow housing will not cover recessed J Box. Whip feed recommended. Use optional "JBP" canopy plate for J-Box mount. (See Picture Below)



J-BOX PLATE
JBP 5" FLAT CANOPY PLATE
 TO COVER J-BOX


PHOTOMETRICS

WAR WHITE ACRYLIC

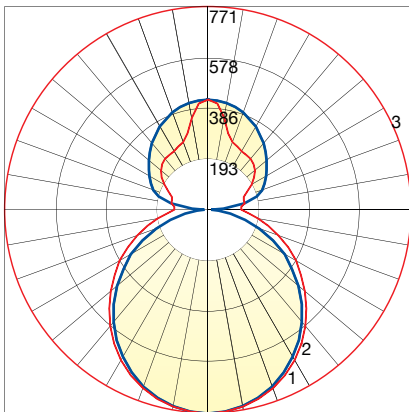

File: L041507501.IES
 Maximum Candela = 771
 High 35K
 IES Files Available By Request

PARD PERFORATED ALUMINUM WITH DIFFUSER

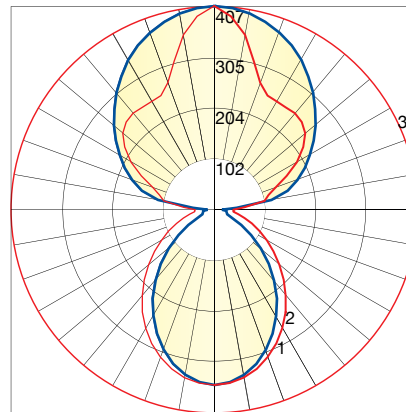

File: L041507502.IES
 Maximum Candela = 407
 High 35K
 IES Files Available By Request