


Iris Type S

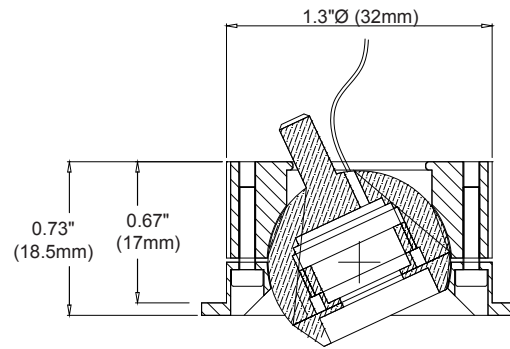


IP65 rated tiny eyeball fitting that finishes almost flush with its mount surface. Available tilt: $\pm 22^\circ$

- Materials: Aluminum
- Color Temp: 2700K, 3000K, 3500K or 4000K
- Lamp: Type S (1 x Osram Oslon Square)
- IP Rating: IP65
- Optics: 0.4"Ø (10mm) optics. Please refer to the table below for beam angle options and ordering information. Snoots available.
- Finish: White (Standard) Pure White RAL 9010 30% gloss
Black (Standard) Powdercoat Matte Black 5% gloss
Custom paint and anodized finishes available
- Dimming: EldoLED 0-10V or DMX
- Driver: Constant current remote driver required
Allow 1.4W at 500mA
- Cut out: 1.3"Ø (34mm)
- Locking: With 1.5mm Allen key
- Available Tilt: $\pm 22^\circ$
- Weight: 0.22lb (0.1kg)

Order Code	series.col temp.beam.finish.dimming
Example	Iris Type S.2700K.19°.black.D010

Series	Color	Beam	Finish	Dimming and control	Snoot Options
Iris Type S	2700K	18°	white black custom	D010 0-10V DMX DMX	SN Straight Snoot SN2 Angled Snoot
	3000K	26°			
	3500K	33°			
	4000K	48°			
		80°			

Snoot Options:



LED Information

The Type S PCB uses 1 x Osram Oslon Square power LED thermally bonded to an aluminium PCB.