






ZTA.70.Mains Track

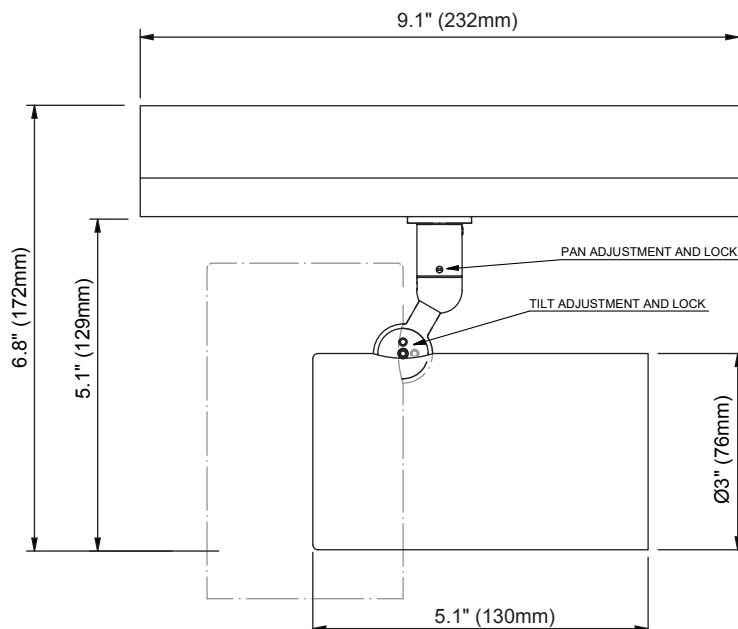


Order Code	ZTA.70.Mains Track.light source.beam.finish
------------	---


Materials:	Aluminum
Mount type:	Surface
Light source	Xicato XOB COB LED Xicato XTM 19mm LES LED module <i>LED lifetime: L70, B0, F0 at 50,000hrs</i> <i>Col consistency: 1x2 SDCM</i>
Output:	See table over page
Dimming:	See table over page
Finish:	Standard offering is RAL 9010 Pure White or Matt Black Internal lamptube is Matt Black Bespoke finishes are available
Supply:	230/240V via 3 circuit track
Locking:	2mm Allen key required
Available tilt:	130°
Available pan:	363°
Weight:	2.2lbs (1kg)
Description:	ZTA is a truly unconstrained new product range, be that in choice of light source, optic, paint finish, control system or how it's mounted. With a simpler aesthetic, it offers versatility and a product that is truly maintainable, re-manufacturable and ultimately recyclable.
Beams:	See table over page
Accessories:	Can accommodate up to 2 x Ø2.8" (70mm) lens or louver

Very high output, fixed optics, Zoom and WW	High output, fixed optics	Low output, tight beams and Zoom	High output, wall wash								
											
Xicato XOB 0.57" (14.5mm)	Xicato XOB 0.39" (9.8mm)	Xicato XOB 0.24" (6mm)	0.75" (19mm) XTM								
Dimming Option	Dimming Option	Dimming Option	Dimming Option								
0-10V, DALI, Mains or Wireless (Xicato or Casambi)	0-10V, DALI, Mains or Wireless (Xicato or Casambi)	0-10V, DALI, Mains or Wireless (Xicato or Casambi)	0-10V, DALI, Mains or Wireless (Xicato or Casambi)								
<table><tr><td>CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf</td><td>CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf</td></tr></table>	CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	<table><tr><td>CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</td><td>CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</td></tr></table>	CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	<table><tr><td>CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td><td>CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td></tr></table>	CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	<table><tr><td>CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf</td><td>CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf</td></tr></table>	CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf	CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf
CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf										
CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf										
CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf										
CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf	CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf										
CCT	CCT	CCT	CCT								
2700K, 3000K, 3500K, or 4000K	2700K, 3000K, 3500K, or 4000K	2700K, 3000K, 3500K, or 4000K	2200K, 2700K, 3000K, 3500K, 4000K or 5600K								
Beam Options	Beam Options	Beam Options	Beam Options								
Narrow (22°) Medium (24.5°) Flood (31.7°) Flood 2 (45.7°) Wide Flood (60.9°) Zoom (22.9°-39.3°) Wall Wash (81.3°-41.4°) <small>Wall Wash output is 2580lm @80CRI, 2310lm @95CRI</small>	Narrow (15.1°) Medium (22°) Flood (31.2°) Flood 2 (44.3°) Wide Flood (64.5°) Zoom (16.6°-41.2°)	Very Narrow (10.9°) Medium (22°) Flood (35.5°) Flood 2 (49°) Wide Flood (66°)	Narrow (22.7°) Medium (27.4°) Flood (37.4°) Wide Flood (43.5°) Wall Wash (89.5° x 55°) <small>*Wall Wash output is 2100lm @80CRI, 1860lm @95CRI</small>								


Wiring

The ZTA.70.Mains Track is supplied with a Stucchi Onetrack UL mains track adaptor.

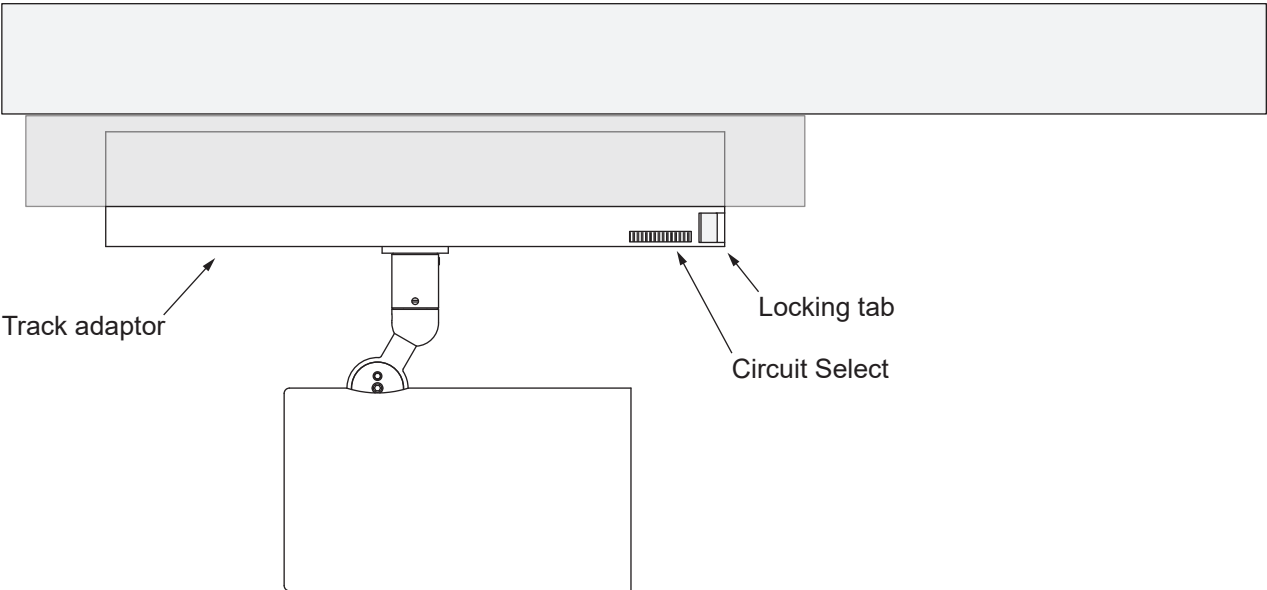





Clear lens
Frosted lens
Stipple/patterned lens
Filter



Sharp Elliptical
Spread Lens




Diffuse Elliptical
Spread Lens




Honeycomb Louver

ZTA.70 has provision for two accessories. Only one accessory can be used with the following attachments:

ZTA.70 Snoot

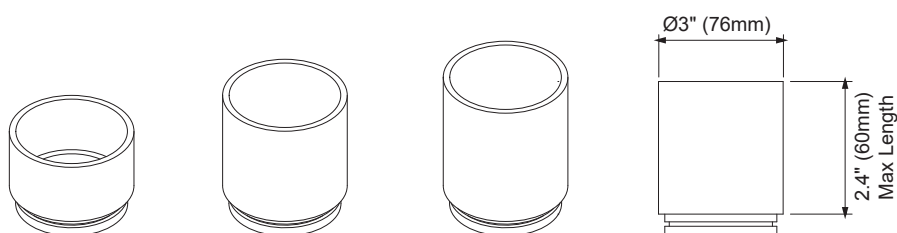

ZTA.50 Slash Cut Snoot

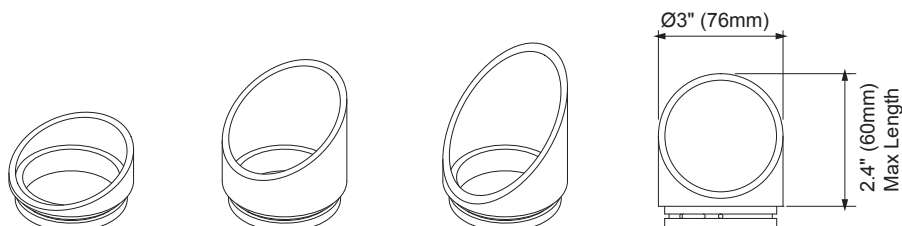

ZTA.50 Barn Doors

