

JOB NAME _____

CONTACT _____



ORDERING CODE _____

ORDERING CODES

LM-79

LASH

Surface Mount

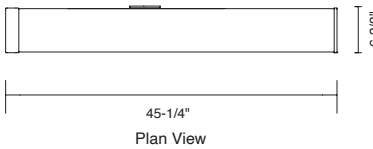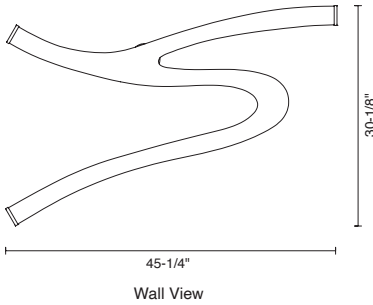

DESCRIPTION

- Organic shaped with white opal diffuser made of rotomoulded polyethylene with chrome end caps
- Complete working fixture included
- Chrome end caps included

ELECTRICAL

- 120-277Vac input, 50/60Hz
- 0-10V, dimming to 10%

LISTING

- ETLus Listed to UL1598 (suitable for dry and damp locations)
- cETL Listed to CSA C22.2 #250.0

LED PERFORMANCE

- LED: OSRAM
- SDCM: 3 Step MacAdam Ellipse
- CCT: 3000K or 3500K
- CRI: > 80, typ 85
- Life: L_{80} 50,000hrs

PART NUMBER	FEATURES	KELVIN	LUMENS
SYS 47W			
660-30195usa	opal diffuser	3000	5100
660-30175usa	opal diffuser	3500	5100