

CONTACT:

JOB NAME:

ORDERING CODE:

COMO SERIES

DESCRIPTION

- Round LED aluminum semi-recessed spotlight
- Matte chrome or chrome finish
- 1, 2 or 4 light points
- Optional 2" J-box

MOUNTING

Line Voltage (with j-box and driver)

- 2-1/4" hole cutout
- 3/16" - 1-1/16" required material thickness

Low Voltage (without j-box and driver)

- 1-3/8" hole cutout
- 1/2" required material thickness

ELECTRICAL

Line Voltage

- 120-277Vac input, 50/60Hz, 5.6VA, 3W
- For dimming options consult factory

Low Voltage


- 3.1Vdc, 500mA constant current, 1.6W (remote driver required)

LISTINGS

- ETLus Listed to UL1598 and UL2108 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0
- IP54 rated

LED PERFORMANCE

LED	Cree XPG
SDCM	3 Step MacAdam Ellipse
CCT	3000K
CRI Ra	>80
Life	L70: 51,000hrs

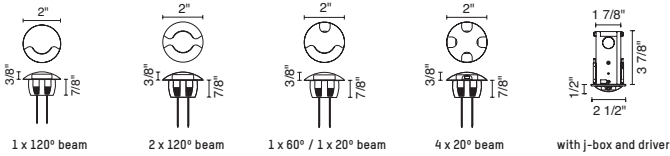

ORDERING CODES

COMO 1 x 120° driver included with j-box version

Part Number	Description	
56-60061a	Chrome	2900K • 49 lm
56-60062a	Matte Chrome	2900K • 49 lm
56-60061a-2	Chrome	j-box • 2900K • 49 lm
56-60062a-2	Matte Chrome	j-box • 2900K • 49 lm
56-60111amb	Chrome	amber • 6 lm
56-60112amb	Matte Chrome	amber • 6 lm
56-60111amb-2	Chrome	j-box • amber • 6 lm
56-60112amb-2	Matte Chrome	j-box • amber • 6 lm

COMO 2 x 120° driver included with j-box version

Part Number	Description	
56-61061a	Chrome	2900K • 80 lm
56-61062a	Matte Chrome	2900K • 80 lm
56-61061a-2	Chrome	j-box • 2900K • 80 lm
56-61062a-2	Matte Chrome	j-box • 2900K • 80 lm
56-61111amb	Chrome	amber • 6 lm
56-61112amb	Matte Chrome	amber • 6 lm
56-61111amb-2	Chrome	j-box • amber • 6 lm
56-61112amb-2	Matte Chrome	j-box • amber • 6 lm

COMO 60° / 20° driver included with j-box version

Part Number	Description	
56-62061a	Chrome	2900K • 49 lm
56-62062a	Matte Chrome	2900K • 49 lm
56-62061a-2	Chrome	j-box • 2900K • 49 lm
56-62062a-2	Matte Chrome	j-box • 2900K • 49 lm
56-62111amb	Chrome	amber • 6 lm
56-62112amb	Matte Chrome	amber • 6 lm
56-62111amb-2	Chrome	j-box • amber • 6 lm
56-62112amb-2	Matte Chrome	j-box • amber • 6 lm

COMO 4 x 20° driver included with j-box version

Part Number	Description	
56-63061a	Chrome	2900K • 49 lm
56-63062a	Matte Chrome	2900K • 49 lm
56-63061a-2	Chrome	j-box • 2900K • 49 lm
56-63062a-2	Matte Chrome	j-box • 2900K • 49 lm
56-63111amb	Chrome	amber • 6 lm
56-63112amb	Matte Chrome	amber • 6 lm
56-63111amb-2	Chrome	j-box • amber • 6 lm
56-63112amb-2	Matte Chrome	j-box • amber • 6 lm

DRIVER MATRIX

DRIVER		QUANTITY	POWER SPEC
P70418-500	26W LED Driver w/ box	for 2-8 fixtures	120-277V, 26W, 500mA, Trailing Edge (ELV) dimming
P70414-500-ECO	50W LED Driver w/ box	for 1-16 fixtures per channel (1 channel driver)	120-277V, 50W, 500mA, 0-10V (1%) dimming
P70414-500-SOLO	50W LED Driver w/ box	for 1-16 fixtures per channel (2 channel driver)	120-277V, 50W, 500mA, 0-10V (.1%) dimming
P70469-500-ECO	50W LED Driver w/ box	for 1-16 fixtures per channel (1 channel driver)	120-277V, 50W, 500mA, DALI (1%) dimming
P70469-500-SOLO	50W LED Driver w/ box	for 1-16 fixtures per channel (2 channel driver)	120-277V, 50W, 500mA, DALI (.1%) dimming
P70470-500	50W LED Driver w/ box	for 1-16 fixtures per channel (3 channel driver)	120-277V, 50W, 500mA, DMX/ ROM (0%) dimming