


JOB NAME

CONTACT

ORDERING CODE

KADO

Tiltable  
Recessed Spotlight



**DESCRIPTION**

- Tiltable LED recessed spotlight
- Matte chrome or chrome finish
- 50° tilt, 12° or 30° faceted lenses

**MOUNTING**

**Low Voltage**

- 1 3/8" hole cutout
- 3/8" required material thickness

**ELECTRICAL**

**Low Voltage**

- 3.2Vdc, 500mA constant current, 1.6W (remote driver required)

**LISTING**

- ETLus Listed to UL2108 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #9.0
- IP20 rated

**LED PERFORMANCE**

**LED:** Cree XPG

**SDCM:** 3 Step MacAdam Ellipse

**CCT:** 3000K


**CRI:** >80

**Life:** L70 51,000hrs

ORDERING CODES

LM-79

PART NUMBER	FEATURES	DEGREE	KELVIN	LUMENS
56-6126	chrome	12°	3000	126
56-6026	matte chrome	12°	3000	126
56-6127	chrome	30°	3000	126
56-6027	matte chrome	30°	3000	126

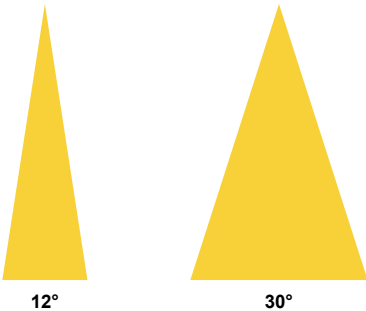

DRIVER MATRIX

PART NUMBER	DRIVER	QUANTITY	POWER SPEC
P70418-500	32W LED Driver w/ box	for 7-14 fixtures	120-277V, 32W, 500mA, Trailing Edge (ELV) 1% dimming
P70414-500-ECO	50W LED Driver w/ box	for 1-16 fixtures per channel (1 channel driver)	120-277V, 50W, 500mA, 0-10V (1%) dimming
P70414-500-SOLO	50W LED Driver w/ box	for 1-16 fixtures per channel (2 channel driver)	120-277V, 50W, 500mA, 0-10V (.1%) dimming
P70469-500-ECO	50W LED Driver w/ box	for 1-16 fixtures per channel (1 channel driver)	120-277V, 50W, 500mA, DALI (1%) dimming
P70469-500-SOLO	50W LED Driver w/ box	for 1-16 fixtures per channel (2 channel driver)	120-277V, 50W, 500mA, DALI (.1%) dimming
P70470-500	50W LED Driver w/ box	for 1-16 fixtures per channel (3 channel driver)	120-277V, 50W, 500mA, DMX/ROM (0%) dimming