

# HDL11-RM TAOS



P1

C4








90

S1

The compact **HDL11-RM** down light is engineered around Auroralight's interchangeable LED module to deliver brilliant LED performance in a small package. Ideal for illuminating patios, al fresco dining areas and outdoor counter tops.

## Features include:

- Interchangeable LED Module in 2, 4 or 6 Watts up to 345 lumens
- Interchangeable UV & Shock Resistant Silicone Optic
- 2700K (80 & 90 CRI) or 3000K (80 CRI)
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Also available with Hanging and Catenary Mount Options (See HDL11-HL and HDL11-ACS)

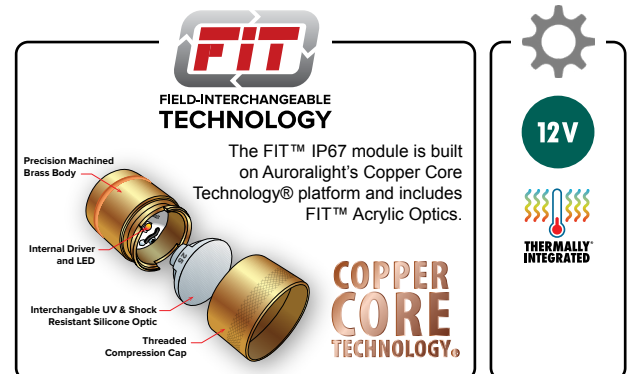

SEE NEXT PAGE FOR ORDERING INFORMATION

# HDL11-RM TAOS



Prefix

**ORDERING GUIDE:** **HDL11-RM** H (HIGH PERFORMANCE) DL (DOWN LIGHT) 11 (SERIES) RM (RIGID MOUNT)

☐ INDICATES REQUIRED FIELD    ☐ INDICATES OPTIONAL FIELD    ☒ INCLUDED    [ \_ ] QUICK SPEC (See Below)

**QUICK SPEC SKU**    **HDL11-RM-90-6-W-27-H-NAT**
**HDL11-RM**
**SHROUD** ✓

**[90]** 90° Straight  
**[NS]** No Shroud  
**[P1]** Perforated (1 3/4" dia.)  
**[S1]** Starlite (1 3/4" dia.)  
**[AC-X]** Acrylic Lens (4, 6 or 8")

**[X]** = Specify Length

**WATTAGE** ✓

**[2]** 2W  
**[4]** 4W  
**[6]** 6W

**OPTIC** ✓

**[N]** 15° Narrow  
**[M]** 25° Medium  
**[W]** 40° Wide  
**[WF]** 60° Wide Flood  
**[A]** All Optics Kit

**LED COLOR** ✓

**[27]** 2700K, 80 CRI  
**[279]** 2700K, 90 CRI  
**[30]** 3000K, 80 CRI

NOTE: For other CCT and CRI options, contact factory

**ACCESSORIES**

SELECT UP TO TWO  
**[H]** Hex Baffle  
**[L]** Linear Spread  
**[P]** Prismatic Lens  
**[MP]** Micro Prismatic  
**[F]** Frost (Diffusion)

**MOUNT**

**[CP35]** 3x5" Brass Cover Plate  
**[CP4]** 4" Brass Cover Plate  
**[CP45]** 4 1/2" Brass Cover Plate  
**[MC45]** 4 1/2" Brass Mount Canopy  
**[PC60]** 4 1/2" Brass Power Canopy  
(Inc. 60W 120-12V Integral Transformer)  
**[SM2]** 2 1/4" Surface Mount  
**[SM3]** 3 1/4" Surface Mount  
**[SMJB]** 3 1/2" Brass Surface Mount J-Box  
**[STM]** Screw-In Tree Mount

**FINISH**

Standard:

**[NAT]** Natural ✓

Plus (\$):

**[BLP]** Bronze Living Patina  
**[BLP-XD]** BLP Extra Dark

Premium (\$\$\$):

**[NI]** Nickel PVD  
**[PVD]** PVD Color (Contact  
Factory for Color Options)

**MOUNTS**


CP35

CP4

CP45

MC45

PC

SM2

SM3

SMJB

STM

# HDL11-RM TAOS

## PHOTOMETRIC OVERVIEW

Information based on 6W 25° Medium Optic. To download more in-depth IES photometric data, visit [auroralight.com/product/hsi11-rm-taos/](http://auroralight.com/product/hsi11-rm-taos/)

<b>6W 2700K</b> <b>345.0 LUMENS • CBCP 1358</b> <b>AURORALIGHT HDL11-RM-90-6-M-27</b>		
4 FT	84.9	1.82
6 FT	37.7	2.72
8 FT	21.2	3.63
10 FT	13.6	4.54
12 FT	9.43	5.45
14 FT	6.93	6.35
16 FT	5.30	7.26
Distance From Fixture	Footcandles	Beam Width

<b>6W 3000K</b> <b>345.1 LUMENS • CBCP 1358</b> <b>AURORALIGHT HDL11-RM-90-6-M-30</b>		
4 FT	84.9	1.82
6 FT	37.7	2.72
8 FT	21.2	3.63
10 FT	13.6	4.54
12 FT	9.43	5.45
14 FT	6.93	6.35
16 FT	5.31	7.26
Distance From Fixture	Footcandles	Beam Width