


# HPL6K KALAHARI

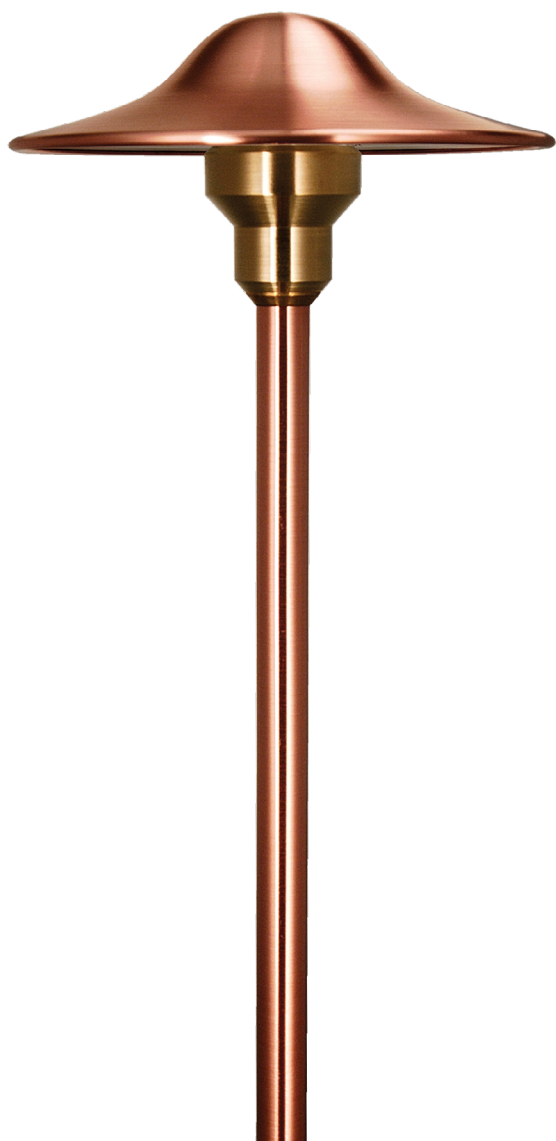


HPL6K-NAT


The compact size of the HPL6K allows for it to be installed discretely into planters, making it ideal for illuminating pathways and intimate garden areas. Use anywhere a less obvious light source is desired. With a timeless design, precision manufacturing, and the highest quality materials, our HPL luminaires are a perfect solution. Every HPL series path light gives you a choice of a Thermally Integrated® Field Serviceable LED Module or traditional Halogen lamp. Using Copper Core Technology®, the HPL module is precisely engineered to transfer heat away from the LED driver/circuit and dissipate throughout the luminaire, ensuring optimal performance, color consistency, and long life!

## Features include:

- Interchangeable LED Module in 2.5 or 3.5 Watts
- Up to 133 lumens at 3.5 Watts
- 2700 or 3000K (CRI 80 typ.)
- Thermally Integrated® Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction
- Patent Pending

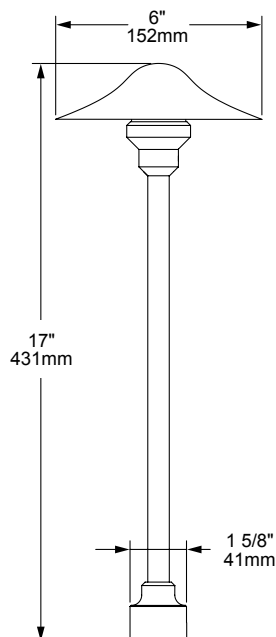

**COPPER  
CORE  
TECHNOLOGY®**

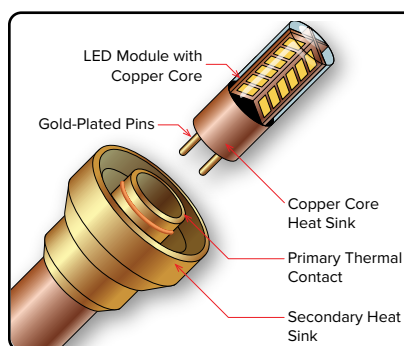

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



**SEE NEXT PAGE FOR ORDERING INFORMATION**





# HPL6K KALAHARI

**ORDERING GUIDE:** <sup>Prefix</sup> **HPL6K** H (HIGH PERFORMANCE) PL (PATH LIGHT) 6 (INCHES) K (KALAHARI)

☐ INDICATES REQUIRED FIELD   
 ☐ INDICATES OPTIONAL FIELD   
 ☒ INCLUDED   
 [ \_ ] QUICK SPEC (See Below)

## QUICK SPEC SKU HPL6K-327-GS-NAT

| HPL6K   |  |  |   |  |
|---|--|--|---|--|
| <b>Auroralight LED Module</b> ✓<br><b>[227]</b> 2.5 Watts, 2700K<br><b>[230]</b> 2.5 Watts, 3000K<br><b>[327]</b> 3.5 Watts, 2700K<br><b>[330]</b> 3.5 Watts, 3000K | <b>ACCESSORIES</b><br>(Select One)<br><b>[180]</b> 180° Directional Reflector™ *<br><b>[270]</b> 270° Directional Reflector™ *<br><b>[ID]</b> Internal Diffuser (Frosted)<br><br>* Visible light | <b>MOUNT</b><br><b>[1/2]</b> 1/2" Male Thread<br><b>[GS]</b> Ground Stake ✓<br><b>[2GS]</b> Ground Stake w 2" Cap<br><b>[3GS]</b> Ground Stake w 3" Cap<br><b>[325GS]</b> Ground Stake w 3 1/4" Cap<br><b>[DS]</b> Deluxe Stake 9"<br><b>[TR-12]</b> 12" Trident Spike<br><b>[PB-S]</b> Power Box w/ Stake<br>(Inc. 60W 120-12V transformer)<br><b>[PM-60]</b> 4" Pedestal Mount<br><b>[SM3]</b> 3 1/4" Surface Mount<br><b>[SM2]</b> 2 1/4" Surface Mount | <b>FINISH</b><br>Standard:<br><b>[NAT]</b> Natural ✓<br><br>Plus (\$):<br><b>[BLP]</b> Bronze Living Patina<br><b>[BLP-XD]</b> BLP Extra Dark<br><br>Premium (\$\$\$):<br><b>[NI]</b> Nickel PVD<br><b>[PVD]</b> PVD Color<br>(Contact Factory for Color Options) |  |



# HPL6K KALAHARI

## PHOTOMETRIC OVERVIEW

Information based on 3.5 Watts. To download more in-depth IES photometric data, visit [auroralight.com/product/hpl6k-kalahari/](http://auroralight.com/product/hpl6k-kalahari/)

Mounting Height - 2 Feet

