

LPL1 CENTINELA




LPL1-BLP

The newly updated LPL1 is a low-energy, high-performance LED path light. Its stylish, contemporary design and slim profile allow it to blend seamlessly into the surrounding landscape. New for the 2021 season is a larger stem for enhanced durability and a re-designed optical system for superior light distribution. Precision-machined here in the USA, the LPL1 exclusively from Auroralight is unrivaled in quality or performance.

Features include:

- 3 Watts
- Cree XP-L® XP-L LED
- 2700K (80 & 90 CRI) or 3000K (80 CRI), or Amber 585-595nm
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Recommended Spacing 10–18' O.C.
- Solid Copper and Brass Construction

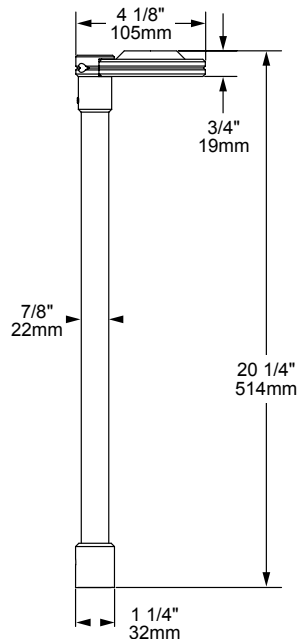

COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V

Powered by
CREE
LEDs



SEE NEXT PAGE FOR ORDERING INFORMATION



LPL1 CENTINELA



ORDERING GUIDE: ^{Prefix} **LPL1** L (LED) PL (PATH LIGHT) 1 (SERIES)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED [_] QUICK SPEC (See Below)

QUICK SPEC SKU LPL1-27-2GS-NAT

LPL1			
LED COLOR ✓ [27] 2700K, 80CRI [279] 2700K, 90CRI [30] 3000K, 80CRI [AMB] Amber (585-595nm) NOTE: For other CCT and CRI options, contact factory	MOUNT [1/2] 1/2" Male Thread [2GS] Ground Stake w 2" Cap ✓ [3GS] Ground Stake w 3" Cap [325GS] Ground Stake w 3 1/4" Cap [DS] Deluxe Stake 9" [TR-12] 12" Trident Spike [PB-S] Power Box w/ Stake (Inc. 60W 120-12V transformer) [PM-60] 4" Pedestal Mount [SM3] 3 1/4" Surface Mount [SM2] 2 1/4" Surface Mount	FINISH Standard: [NAT] Natural ✓ Plus (\$): [BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark Premium (\$\$\$): [NI] Nickel PVD [PVD] PVD Color (Contact Factory for Color Options)	




LPL1 CENTINELA

PHOTOMETRIC OVERVIEW

To download more in-depth IES photometric data, visit auroralight.com/product/lpl1-centinela/

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

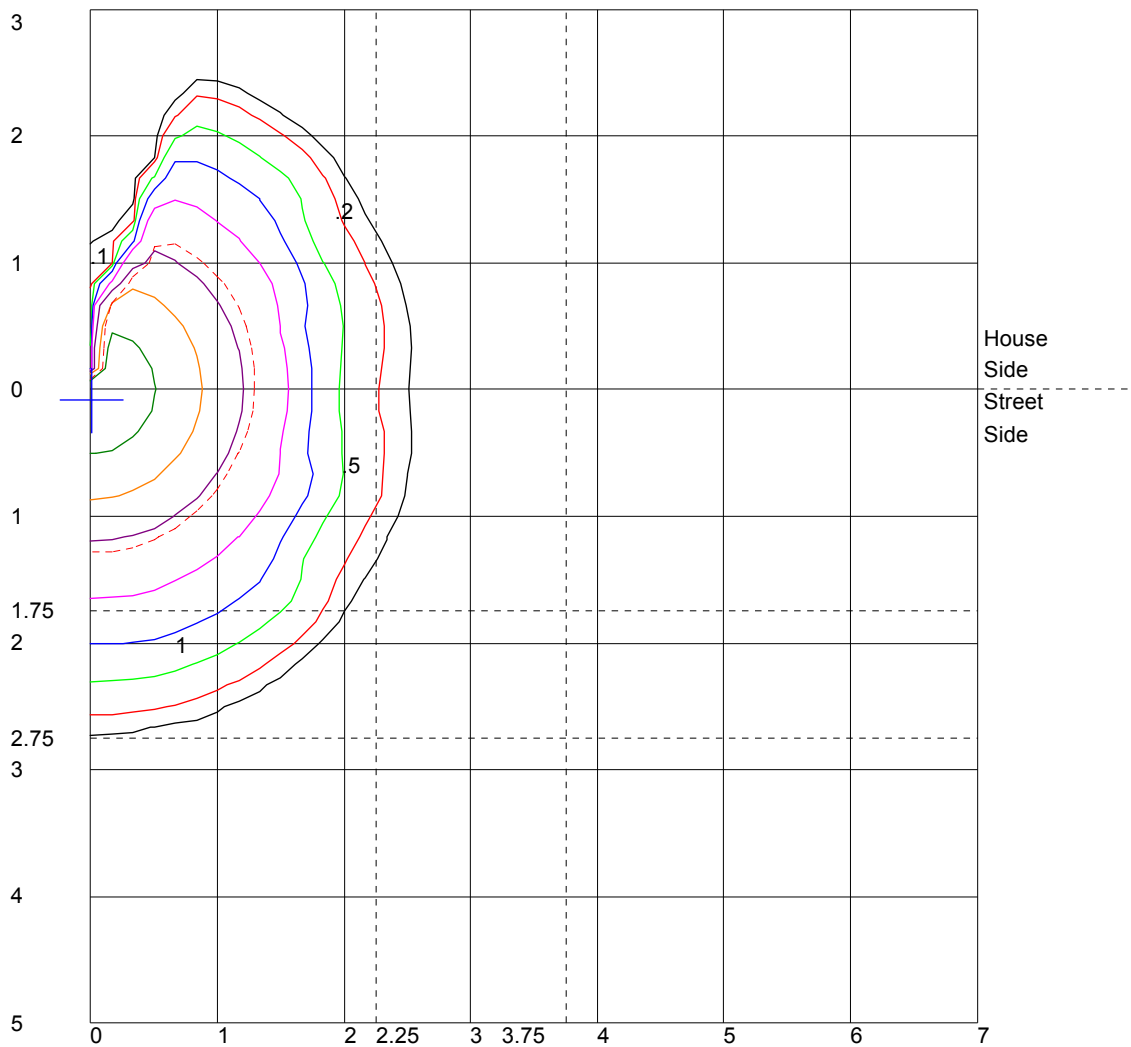

Distance In Units Of Mounting Height

Values Based On 1.56 Foot Mounting Height

1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point