

LBD250-S7-GTL DOMUS

The LBD250 series of LED Bollards is the latest addition to our growing line of innovative and exquisite area light luminaires. This series is available in seven elegant shade designs with three progressive sizes to complement our new series of LML Pendants and LWM Wall Sconces. Our Thermally Integrated® and Field Serviceable LED module provides superior heat dissipation, longer life, and higher performance. Ideal for illuminating small pathways, small driveways, and intimate outdoor spaces.


See LBD350 and LBD400 for additional size and configuration options.

Features include:


- 9 or 12 Watts
- Cree XLAMP® High Intensity (XP-L) LED
- 2700K (80 & 90 CRI) or 3000K (80 CRI)
- Thermally Integrated® w/ Copper Core Technology®
- 12V Integral Constant Current Driver (AC or DC Input)
- Dimmable to <10% (TRIAC/Forward Phase)
- Compatible w/ 12V AC/DC MLV or ELV Transformers
- Solid Copper and Brass Construction



LBD250-S7-GTL-BLP

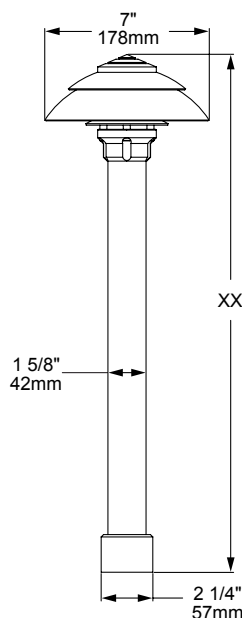

CORE STYLES



COPPER CORE TECHNOLOGY®

Copper Core® is a registered trademark of Auroralight. It is synonymous with the mark of quality and integrity. It means that our products are built upon a superior foundation of Solid Copper, ensuring every critical part functions seamlessly together. Thermally integrated® one component to the next. Auroralight manufactured without compromise, engineered with passion, in the USA.



12V



SEE NEXT PAGE FOR ORDERING INFORMATION



TYPE:

CAT. #:LBD250-S7-GTL-



LBD250-S7-GTL DOMUS

ORDERING GUIDE: **LBD250-S7-GTL** ^{Prefix} L (LED) BD (BOLLARD) 250 (SERIES) S (SPHERICAL) 7 (INCHES) GTL (GLIMMER TOP W/ LOUVER)

□ INDICATES REQUIRED FIELD □ INDICATES OPTIONAL FIELD ✓ INCLUDED [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LBD250-S7-GTL-GL-12-27-25-GS-NAT**

LBD250-S7-GTL

CORE ✓

[GL] Graduated Louvers
[SL] Stacked Louvers
[NL] No Louvers

WATTAGE ✓

[9] 9W
[12] 12W

LED COLOR ✓

[27] 2700K, 80 CRI
[279] 2700K, 90CRI
[30] 3000K, 80 CRI

NOTE: For other CCT and CRI options, contact factory

HEIGHT ✓

[20] 20"
[25] 25"
[XX] Specify
Min: 12" Max: 48"

MOUNT

[1/2] 1/2" Male Thread
[GS] Ground Stake ✓
[TR-12] 12" Trident Spike
[JB3-S] 3" Junction Box w/ PVC Stake
[PB-S] Power Box w/ PVC Stake Incl. 60W 120-12V Trans.
[PM-60] Pedestal Mount
[LP] Leveling Pedestal
[SM] Surface Mount

FINISH

Standard:
[NAT] Natural ✓
Plus (\$):
[BLP] Bronze Living Patina
[BLP-XD] BLP Extra Dark
Premium (\$\$\$):
[NI] Nickel PVD
[PVD] PVD Color
(Contact Factory for Color Options)

MOUNTS

LBD250-S7-GTL DOMUS

PHOTOMETRIC OVERVIEW

Information based on 12W & 3000K. To download more in-depth IES photometric data, visit auroralight.com/product/lbd250-s7-gtl-domus/

Mounting Height - 2 Feet

