

Kruzitti

TMSLIGHTING

ESTABLISHED 1923



Features

- Appealing geometric appearance blends with contemporary through modern architecture
- Large 88" diameter design provides wide area coverage with a high degree of uniformity; equal amounts of uplight and downlight
- Surge suppressor protects the internal components
- Choice of CCT and finish for projecting the right ambience
- Skilled workmanship with reliable components and the most current technology for quality, efficiency and reduced lighting costs

Applications

Kruzitti is ideal for illuminating spaces where a geometric look plays a main role in complementing the architecture. Such areas include entertainment venues, hospitality establishments, corporate facilities, and any area dedicated to progress.

Construction

Kruzitti is made of steel and acrylic, supported by 4 aircraft cables.

Lamp

224W Cree™ LED; specify 3000K, 3500K or 4000K CCT.

LED Driver

The LED source is controlled by an advanced, electronic driver that delivers consistent power.

Diffuser

The circular diffuser is made of UV-stabilized, opal-white acrylic. It creates a soft, general diffuse pattern, without any direct glare.

Surge Suppressor

All 120V, 277V, and universal voltage LED luminaires are equipped with an integral, 6kV surge suppressor.

Dimming

The LED dimming option is the 0-10V, current-sinking type.

Note: A current-sinking dimming system (by others) must be used with this option.

Compatibility of this product is not guaranteed with all control systems.

Mounting

Mount on a ceiling, with the canopy and power cord going directly to a standard 4" electrical junction box. Secure the other 3 aircraft cables, and adjust to the desired mounting height.

Follow the installation instructions, and adhere to your local electrical code.

Finish

Available in several TMS specialty, plated, and powder-coated finishes. See the Finishes and Diffusers chart.

Compliances


QPS-C/US, or UL-C/US certified to UL1598 standards. Rated IP20 for dry, indoor locations. Consult the factory for the CE certification.



Kruzitti

TMSLIGHTING

ESTABLISHED 1923



Project: _____
Type: _____
Quantity: _____

Notes:

1 • Lamping

224LED: 224W LED (CRI 80)

2 • LED CCT (color temp.)

30K: 3000K
35K: 3500K
40K: 4000K

3 • Voltage

120: 120V
277: 277V

4 • Finish

Specialty

AN: Anodized (bright)
BR: Brushed aluminum

Plated

SN: Satin nickel
CH: Chrome
BC: Black chrome
AC: Antique copper
AB: Antique brass
PB: Polished brass
SB: Satin brass

Powder-coated

F05: White
F06: Clay
F07: Zeus brown
F08: Midnight blue
F09: Pewter
F10: Fire red
F13: Forest green
F14: Sunshine yellow
F15: Matte black
F16: Gloss black
F18: Satin aluminum
F19: Mirror silver
F21: Architectural bronze
F22: Harvest gold
F24: Melted platinum (textured)
F25: Melted gold (textured)
F26: Melted copper (textured)
F28: Faux nickel
F31: Silver metallic
F32: Metallic bronze
F33: Pyrite bronze
F34: Burnt orange
RAL: RAL custom color (specify)

5 • Dimming

—: None

DIML: LED dimming (0-10V, current-sinking)

Note: A current-sinking dimming system (by others) must be used with this option.

Compatibility of this product is not guaranteed with all control systems.




Kruzitti


TMSLIGHTING

ESTABLISHED 1923

bottom view

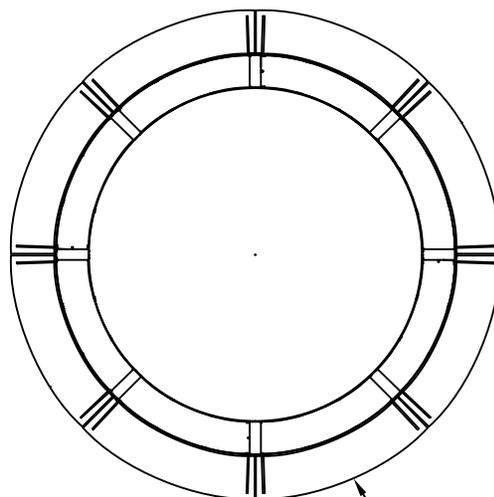

88" (2235 mm) dia.

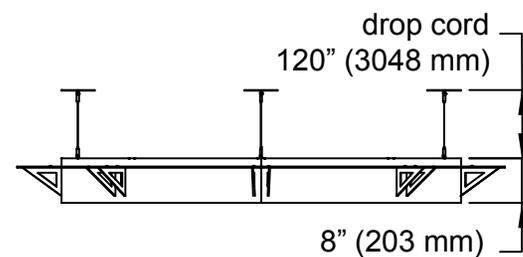

Custom

TMS Lighting can customize this and many of our standard fixtures. The dimensions, lamp types, enclosure and colors could be modified to suit your lighting and architectural requirements. Contact your local representative for more details: <http://www.tmslighting.com/info/agents>

Specifications are subject to change without notice.

TMS Lighting Inc.
247A Summerlea Road,
Brampton, Ontario,
Canada. L6T 4E1

Web Site: tmslighting.com

North America: (905) 793-1174

Toll-free: (866) 793-1174

Fax: (905) 793-1175

UK & Europe: 44-1474-250-654