


Houston Series Ceiling Mount






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HO1207C • W 12 • HT 10	ABT	2-100W A21 (200W)	1	PC	AD AG	CC FM	SQ	LOGO SIL
HO1408C • W 14 • HT 11	GHB	4,800lm LED (27W)	1	PC	AD AG	CC FM	SQ	D1 D2* LOGO SIL
	ABV	3-100W A21 (300W)	1	PC	AD AG	CC FM	SQ	LOGO SIL
HO1609C • W 16 • HT 12	GJK	4,800lm LED (27W)	1	PC	AD AG	CC FM	SQ	D1 D2* LOGO SIL
	ABX	3-100W A21 (300W)	1	PC	AD AG	CC FM	SQ	LOGO SIL
HO1811C • W 18 • HT 14	GHD	4,800lm LED (27W)	1	PC	AD AG	CC FM	SQ	D1 D2* LOGO SIL
	ABZ	3-100W A21 (300W)	1	PC	AD AG	CC FM	SQ	LOGO SIL
HO2206C • W 22 • HT 7	DUL	6-60W A19 (360W)	1	PC	AD AG	CC FM	SQ	LOGO SIL
HO2208C • W 22 • HT 11	FXI	9,700lm LED (53W)	1	PC	AD AG	CC FM	SQ	D1 LOGO SIL
	FIE	15,800lm LED (106W)	1	PC	AD AG	CC FM	SQ	D1 LOGO SIL
	GEM	6-60W A19 (360W)	1	PC	AD AG	CC FM	SQ	LOGO SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

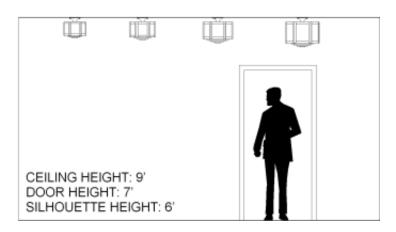

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

CC Ceiling Canopy
FM Flush Mount

Louvers

SQ Square Cell

Dimming Types

0 D1 1 D2

Options

SIL Silhouette Symbol LOGO Custom Logo