

NICHE-HV

Micro Profile LED Fixture Line Light

In the State State State of the State of the

Customer:

Type:

Date:

Project:


- · Compact, variable light fixture for interior use
- · Fixture comes in 4" increments.
- Many options in color temperature to suit a range of projects. Call factory for additional options.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, DALI or DMX Dimming.
- \cdot Uses standard line voltage dimming in forward or reverse phase.
- · Linkable for longer runs.
- · Interior installation use only.



PRODUCT SPECIFICATIONS:

Niche	HV	WATTAGE	COLOR OPTION	OPTIC 120°	VOLTAGE	FINISH A	LENS
		4W 8W	2400K 2700K 3000K			A Clear Anodized Aluminum	C Clear CLD Clear Light Diffused HD Heavy Diffused
			3500K 3500K 4000K 5000K				The neavy billised

DIMENSIONS:

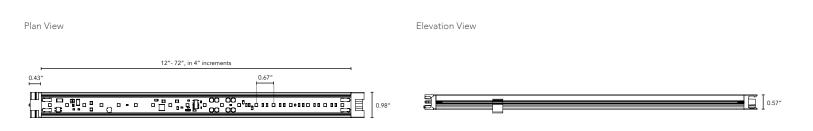

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2017 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NICHE-HV meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.

NICHE-HV

Micro Profile LED Fixture Line Light




TECHNICAL SPECIFICATIONS:

WATTAGE	4 or 8 watts per linear ft.	
INPUT VOLTAGE	120VAC	
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V, DALI, or DMX*	
LED SPACING	5/8" on center	
LENGTH	12"-72" in 4" increments, allow 1/4" for each end cap and 2" for power feed cable	
TOTAL HEIGHT	0.59" (not including clip)	
TOTAL WIDTH	0.91″	
COLOR OPTIONS	2400K, 2700K, 3000K, 3500K, 4000K, 5000K	
MOUNTING	Fixed	
AVAILABLE OPTICS	120°	
RATING	Interior Only	
COLOR RENDERING INDEX (CRI)	90 + CRI	
POWER CABLE	UL Standard 6 ft.	

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- $\cdot\,$ For installations above 4' please contact the factory.



Fixed

LUMINAIRE INFORMATION:

IES Files Pending

· Specific Files Available On Request

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2017 Boca Flasher, Inc.

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NICHE-HV meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.