

SPECIFICATIONS

DESCRIPTION:

Compact recessed in-grade fixture with adjustable light source and protective lens grill. Suitable for wet/damp location installations.

MATERIAL:

Standard overall material is brass.

HL-835 - Cast Brass

FINISH:

AP - Powder Coat Aluminum

BK - Powder Coat Black

BZ - Powder Coat Bronze

WT - Powder Coat White

N - Natural Brass

HALOGEN LAMPING OPTION:

Lamp Type - 12V halogen MR16 lamp, bi-pin GX5.3 base, 50W max, not included (standard).

LED OPTIONS

Integral high output LED, warm white 85 CRI (3000K CCT) standard, others available.

3LED - 3W LED - 180 lumens

8LED - 8W LED - 300 lumens

8LED-E - 8.4W LED - 565 lumens

OPTICS

3LED and 8LED:

SP - Spot, 12°

NF - Narrow Flood, 24°

FL - Flood, 36°

8LED-E:

SP - Spot 14°

NF - Narrow Flood, 25°

MF - Medium Flood, 30°

FL - Flood, 40°

VOLTAGE:

12 - 12 VAC output transformer required, not included. 2ft SJO cord included.

MOUNTING:

Suitable for installation into concrete, masonry or any other non-combustible material.

OPTIONS:

Pour Housing

HL-8PH - Brass flange, PVC tube





See fixture accessories for more information.

SAMPLE ORDER SPECIFICATION:

HL-835-N-12-HL8PH

RATING:

Wet/damp location - IP67

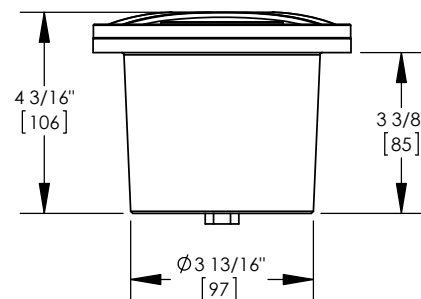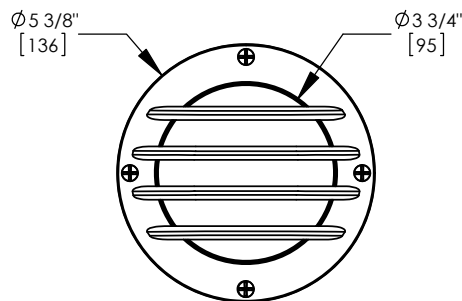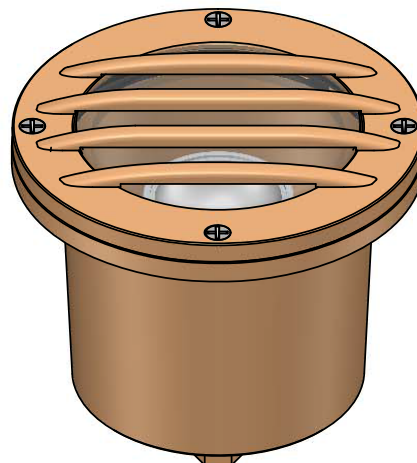

ORDER SPECIFICATION: _____ - _____ - _____ - _____ - _____
Fixture Finish Lamping Voltage Options/Access.

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.

9714 Variel Ave, Chatsworth, CA 91311
Tel., (818) 341-8091 - Fax (818) 998-1986
Web Site <http://www.hevilite.com>

CATALOG NUMBER:

HL-835