


JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

**ORDERING CODES**

**CADAN** Surface Direct

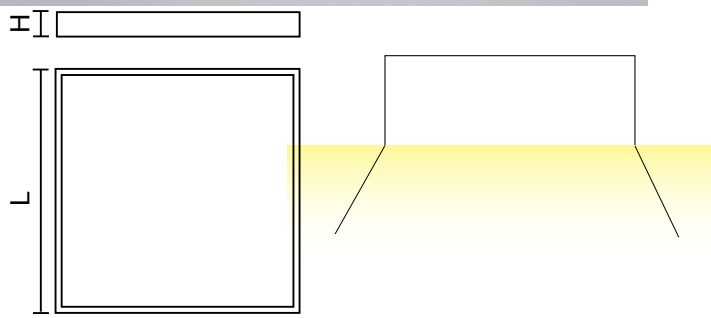

PART NUMBER	FEATURES	L x H	KELVIN	LUMENS
<b>CADAN SD 13" SYS 13W</b>				
220-07331915adusa	white	13" x 3 1/8"	3000	1360
220-07331715adusa	white	13" x 3 1/8"	3500	1390
220-07331916adusa	black	13" x 3 1/8"	3000	1360
220-07331716adusa	black	13" x 3 1/8"	3500	1390
220-07331918adusa	matte chrome	13" x 3 1/8"	3000	1360
220-07331718adusa	matte chrome	13" x 3 1/8"	3500	1390
<b>CADAN SD 25" SYS 45W</b>				
220-07631915adusa	white	24 7/8" x 3 1/8"	3000	5450
220-07631715adusa	white	24 7/8" x 3 1/8"	3500	5570
220-07631916adusa	black	24 7/8" x 3 1/8"	3000	5450
220-07631716adusa	black	24 7/8" x 3 1/8"	3500	5570
220-07631918adusa	matte chrome	24 7/8" x 3 1/8"	3000	5450
220-07631718adusa	matte chrome	24 7/8" x 3 1/8"	3500	5570
<b>CADAN SD 36" SYS 97W</b>				
220-07901915adusa	white	35 1/2" x 4 1/2"	3000	12270
220-07901715adusa	white	35 1/2" x 4 1/2"	3500	12535
220-07901916adusa	black	35 1/2" x 4 1/2"	3000	12270
220-07901716adusa	black	35 1/2" x 4 1/2"	3500	12535
220-07901918adusa	matte chrome	35 1/2" x 4 1/2"	3000	12270
220-07901718adusa	matte chrome	35 1/2" x 4 1/2"	3500	12535

**DESCRIPTION**

- Square architectural surface mount
- Direct light
- White, black or matte chrome finish
- Opal diffuser

**MOUNTING**

- Mounted over a 3" - 4" recessed round junction box

**ELECTRICAL**

- 120 - 277Vac input, 50/60Hz
- 010V dimming to 10%

**LISTING**

- ETLus Listed to UL1598 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0
- IP20 rated

**LED PERFORMANCE**

LED: Samsung  
 SDCM: 3 Step MacAdam Ellipse  
 CCT: 3000K or 3500K  
 CRI: >80  
 Life: L80 50,000hrs