




Job Name:

Contact:

Ordering Code:

Fixture Type:

Gallery Canopy

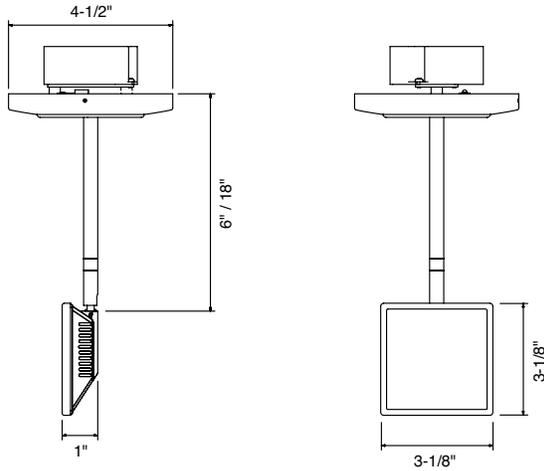

Description

The Gallery Canopy mount is a high performance display flood fixture. The precision engineered LED board has 8 watts of LED's using 81 emitters which creates an even wash distribution. Gallery produces an impressive 850 lumens from a 3 x 3 square aperture of its half inch low profile body and is easily mounted to a 4" jbox for wall or ceiling applications. The Gallery Canopy is offered in Matte Chrome and extends from the 4" canopy from a 6" or 18" stem with full rotation and a 45 degree tilt.

Housing

Machined aluminum housing with matte chrome finish. Optional snoot glare shield.

Mounting

Round canopy over a 3-1/2" - 4" recessed round junction box.

Electrical / LED Driver

120Vac input, 50/60Hz, 10.3W, 11.3VA. Trailing Edge (ELV) dimming and Leading Edge (TRIAC) Dimming. *Consult factory for other voltage options.

Listings

ETLus Listed to UL1598 (suitable for dry and damp locations)
 cETL Listed to CSA C22.2 #250.0
 Made in the USA - meets the requirements of the Buy American provision within the ARRA.

LED Performance

- LED:** Nichia 757A
- DUV** +/- .003
- CCT:** 3000k (810lm), 4000k (850lm)
- CRI:** 84 typ
- LIFE:** based on IESNA-LM-80-2008: 70% of initial lumens after 60,000 hrs
5 year limited fixture warranty



LM-79

Ordering Codes

Follow the steps to specify your fixture,

example:

1 Light Source	2 Finish	3 Color Temperature	4 Stem*
137400 LED	mc matte chrome	3 3000k 4 4000k	L6 6" L18 18"

NOTES:

*Consult factory for longer stem sizes



Accessory Code

900250mc snoot glare shield, matte chrome