<u>D</u> **E C O**[®] **L I G H T I N G**



Performance Data

CRI 70+

ССТ

4000K, 5000K

Projected Lifetime

145,000 Hours (L70); 90,000 Hours (L80)

Dimming

Available with 0-10V inputs dimming down to 10%

Operating Temperature

-40°C to +50°C Ambient

ETL Listed

Suitable for dry, damp, wet locations



Order #:_ Type: _ Qty:____



Description

The functional and aesthetically pleasing D208-LED is ideal for buildings, backyards, parks, signs, sports fields, and other general applications where flood lighting may come into use. Also suitable for accent, facade, landscape, parking lot, pathway, recreation, retail and security lighting.

Features

system

• ETL Listed; IP65 rated

• High pressure die-cast housing, anti-static powder painting.

Bronze

Push Button Photocell

• Efficient COB ensures excellent performance.

- Weight: 8 lbs (50W) · Highly thermal conductive material and high efficiency cooling
 - Wide Flood Beam: NEMA 6H x 5V
 - 10-Year Limited Warranty





Ordering Information

A FIXTURE SEI	F INISH	
D208-LED	Medium Flood Light	BZ
B WATTAGE/LI	G OPTIONS	
50	50W/52401,2	Т
CCT		
40	4000K ²	
50	5000K ²	
D VOLTAGE		
U	122-277V	
MOUNTING		
НК	Heavy Duty Adjustable Knuckle	
YM	Yoke Mount	

¹ Delivered lumens (4000K) - For 5000K multiply by 1.03 ² DLC Listed


Dimensions





	Inches	
X ₁	9.45	
X ₂	6.30	
X ₃	5.31	
X ₄	9.84	

Photometrics

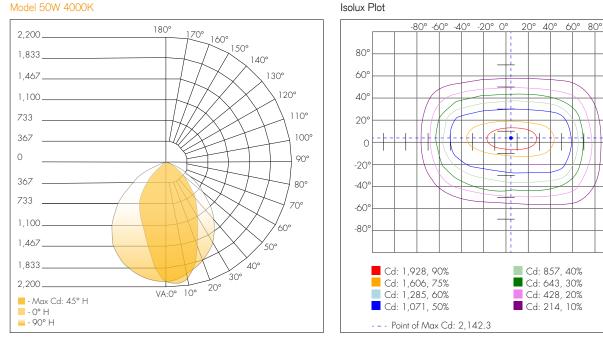

Flood Summary

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%)	97%	5,083.0	122	86.1
Beam (50%)	68.6%	3,596.7	83.7	63.9
Total:	99.8%	5,227.7		

Mounting Options



Heavy Duty Adjustable Knuckle

Side View

© Copyright Deco Lighting, Inc. 2018 2917 Vail Ave. Commerce Ca 90040

www.getdeco.com info@getdeco.com t: (800) 613-DECO f: (310)366-6855

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

