



# D462-LED

## Slim Wallpack

Client: \_\_\_\_\_ Order #: \_\_\_\_\_  
 Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

### Performance Data

CRI

80+

CCT

5000K

### Projected Lifetime

216,000 Hours (L70);  
135,000 Hours (L80)

### Dimming

Available with 0-10V inputs  
dimming down to 10%

### Operating Temperature

-40°C to +40°C Max Ambient

### ETL Listed

Suitable for dry, damp, wet  
locations



ETL

Listed

DLC

Listed

10 Yr

Limited  
Warranty

### Description

The D462 slim wall pack is an ideal wall-mount solution for illuminating apartment complexes, parks, shopping malls, courtyards, and other outdoor locations. Featuring an optional integrated photocell, the D462 pairs a simple, functional design with high efficacy performance. The D462 is designed to withstand the elements for the entirety of its useful lifetime, featuring a durable construction comprised of a die-cast aluminum housing and anti-static powder coat paint finish.

### Features

- Durable die-cast housing, anti-static powder coated paint
- DLC listed for utility rebates (see table below for models currently listed)
- Highly conductive thermal material for efficient heat dissipation
- High efficacy LED COB under-driven extends fixture lifetime
- ETL Listed for dry, damp, and wet locations
- Delivers up to 110 lumens per watt
- Delivers well-dispersed illumination, free of uncomfortable glare and shadowing
- 80+ CRI provides excellent color rendering for outdoor spaces
- L80 Rated Lifetime: 135,000 Hours
- 10-Year Limited Warranty

**D462-LED**

A

B

**50**

C

**U**

D

**BZ**

E

F

### Ordering Information

#### A FIXTURE SERIES

D462-LED Slim Wallpack

#### B WATTAGE/LUMENS

12 12W/1340<sup>1</sup>  
 20 20W/2040<sup>1</sup>

#### C CCT

50 5000K<sup>2</sup>

#### D VOLTAGE

U 122-277V

#### E FINISH


BZ Bronze

#### F OPTION

T Photocell


<sup>1</sup> Delivered Lumens (5000K)

Dimensions

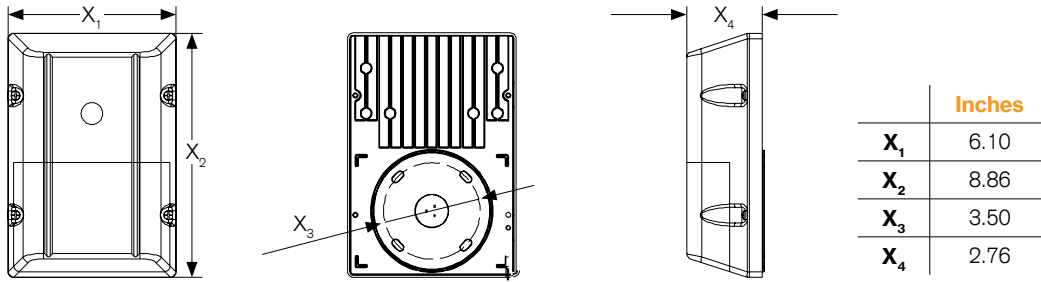


Photometrics

Model 20W 5000K

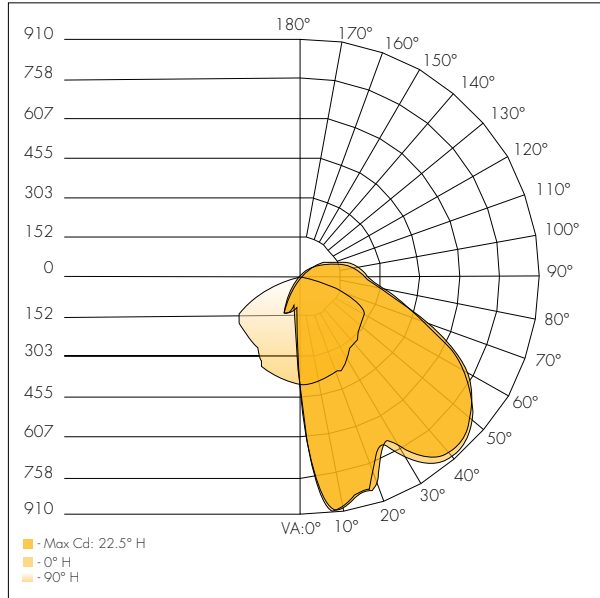

Isofootcandle

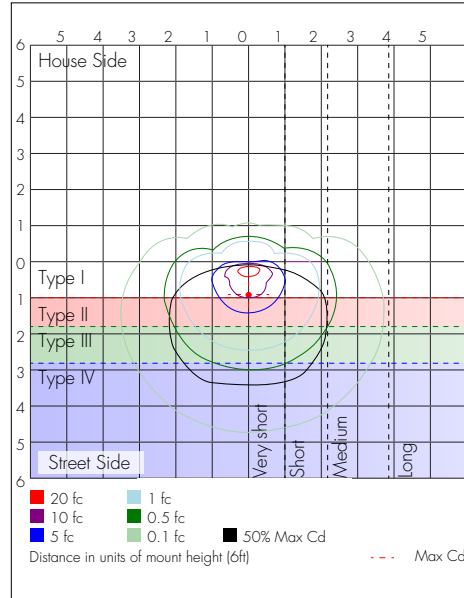

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	384.2	19.4%	18.8%
0-40	632.0	31.9%	31%
0-60	1,235.1	62.3%	60.5%
60-90	563.6	28.4%	27.6%
70-100	378.2	19.1%	18.5%
90-120	192.6	9.7%	9.4%
0-90	1,798.7	90.8%	88.2%
90-180	241.7	12.2%	11.8%
0-180	2,040.3	100%	100%

DLC Listed

	12W	20W
5000K	X	X