## DRIVER VHS LED

Architectural Outdoor












#### PROJECT: TYPE: PO#: QTY: COMMENTS:

#### **FEATURES**

- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- · Clear Prismatic Ribbed Molded Polycarbonate Lens
- Fully Gasketed
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- CSA Listed Wet Location
- · Emergency Battery Available
- · LED Light Fixture

# LINE DRAWING 0.75" Conduit Entries Two Total, One Each on 11 5/8" One Long Side & One Short Side, Centered On The Sides 7 1/2' 0.50" Conduit Entries 7 7/8" Two Total, One Each on One Long Side & One Short Side, Centered On The Sides

### **FINISHES**

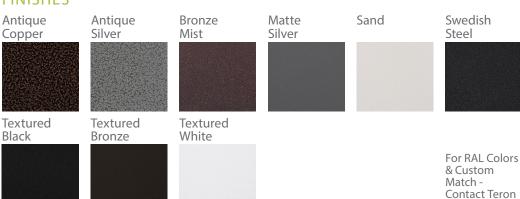





Lighting Inc.

# DRIVER VHS LED

Architectural Outdoor







Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER	
DR - Driver  L13.0-TE500 - 13.0W @ 500mA ELV Dimming Driver (Dimmable @ 120V Only)		120V 277V	Not Applicable	
ORDER INFO				

#### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
VHS	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel  TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB - 5.1W Integral EM Battery SPD – Surge Protection Device
ORDER INFO			
VHS	AC	27K	EB

PROD	SOURCE	30K SPECS		
PROD DR-VHS	L13.0	30K SPECS  • 30K - 3000K Color Temp  • 1740 LED Source Lumens  • 133.8 LED Source Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
Clear Polycarbonate Diffuser	34065	Don't see the configuration you are looking for? Call us today at (513) 858-6004



