

EAGLE LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

The classic design of flush mount fixture lighting makes these popular in a wide variety of areas—indoor walkways, closets, laundry rooms and most residential areas are just a few places that they excel in



FEATURES


- ADA Compliant
- Energy Star Listed (EE11, EE14)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- CSA Listed Damp Location Wall and Ceiling
- LED Light Fixture
- L70 > 50,000 hours
- Meets FCC Part 15, Class B (consumer) Limit
- THD:<20%
- Mounting Hardware Included
- Optional Perforated Decorative Ring
- Optional Internal Motion Sensor
- Optional **Battery Back up**

FINISHES



LINE DRAWING

LINE DRAWING NOT TO SCALE

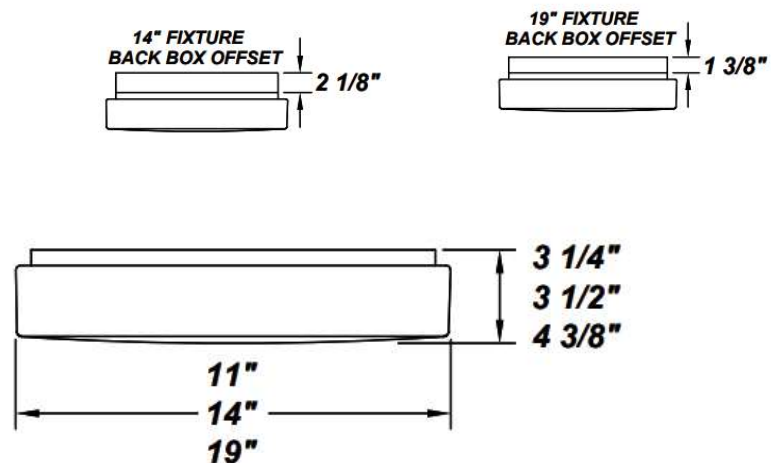

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

EAGLE LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
EE11 - Eagle 11" EE14 - Eagle 14" EE19 - Eagle 19"	(Blank) - No Trim PRF - Perforated Trim	L13.5 - 13.5W L17.0 - 17.0W L20.5 - 20.5W L30.0 - 30.0W (EE19 ONLY) L37.5 - 37.5W (EE19 ONLY)	ZE - 0-10V Dimming ZE - 0-10V Dimming ZE - 0-10V Dimming ZE - 0-10V Dimming ZE - 0-10V Dimming
ORDER INFO			

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120/277V (50 / 60Hz)	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	MSI - Internal Motion Sensor F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit TP - Tamper-Proof Screw Set WLL - LED High Lumen Lens WPL - White Polycarbonate SPD - Surge Protection Device BB - Back Box*** EB/BB - Battery Backup 5.1W (Back Box Required)***
ORDER INFO			

Actual production units may vary from the values reported here by up to +/-10%

PERFORMANCE (DELIVERED LUMEN NO TRIM)

WATTAGE	3000K	LUMEN/WATT	3500K	LUMEN/WATT	4000K	LUMEN/WATT	5000K	LUMEN/WATT
13.5	1072	71	1072	71	1104	74	1115	74
17.0	1364	72	1384	71	1405	74	1419	75
20.5	2478	109	2478	109	1689	74	1706	75
30.0	3353	101	3353	101	3457	104	3488	105
37.5	3847	92	3847	92	3962	95	4002	96

ELECTRICAL DATA

WATTAGE	120V	208V	240V	277V	347V	480V
13.5	0.13	0.07	0.06	0.05	N/A	N/A
17.0	0.16	0.09	0.08	0.07	N/A	N/A
20.5	0.19	0.11	0.09	0.08	N/A	N/A
30.0	0.28	0.16	0.14	0.12	N/A	N/A
37.5	0.35	0.2	0.17	0.15	N/A	N/A

REPLACEMENT PART	PART NO	NOTES
LENS LED Driver	Consult Factory	***Not CSA Damp Location Listed for Wall Mount, Not available in EE11
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM

REV 03/09/2023

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.