PRECEPT LED

Architectural Indoor






TYPE: PO#: COMMENTS:


PROJECT:

QTY:

FEATURES

- ADA Compliant
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- CSA Listed Dry Location For Wall Mounting
- Estimated Lumen Depreciation (TM-21) 70% of Initial Lumens (L70) @ 90,000 Hours
- LED Light Fixture
- Luminous White Acrylic Lens
- Mounts Directly to Flat Surface w/ 2 Wall Anchors (Not Included)
- Steel Trim Accents w/ Matte Silver Powder Trim Finish
- 120V Drivers Are Dimmable With Either Triac or Electronic Dimmers
- 277V Drivers Are Not Dimmable

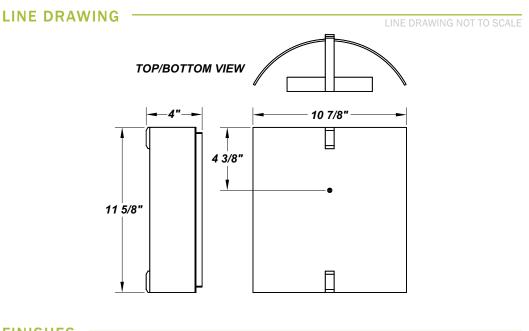

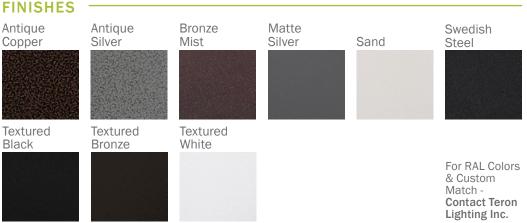



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 1

PRECEPT LED

Architectural Indoor

£ \$

PROJECT: TYPE: PO#: QTY: COMMENTS:

PRODUCT CODE PP - Precept	SOURCE/WATTAGE L12.5 - (1) 12.5W (40) LED Module L25.0 - (2) 12.5W (40) LED Modules	VOLTAGE 120 277V (50 / 60Hz)	DIMMING DRIVER Not Applicable	
ORDER INFO				
PP	L12.5	120	Not Applicable	

Aesthetics & Options

TRIM		FINISH		CC	LOR TEMP		OPTIONS	
Not Applicable	9	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black	BZ - Textured Bronze TW - Textured White	35 40	К - 3000К Color Temp К - 3500К Color Temp К - 4000К Color Temp К - 5000К Color Temp)	F - Fused	
ORDER INFO								
Not Applicab Example ^	le	AC		30	<		F	
PROD	SOURCE	30K SPECS						
РР	L12.5 L25.0	 80 CRI 30K - 3000K Color Temp 1195 LED Source Lumens 95.6 LED Source Lumens Per Watt 80 CRI 30K - 3000K Color Temp 2390 LED Source Lumens 95.6 LED Source Lumens Per Watt 						

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3015360	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 2