TIGER M LED

Architectural Indoor

_	_		
Ę	(1)	LED	7
\smile			

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	





FEATURES


- ADA Compliant
- Aluminum Mounting Plate Mounts to Flat Surface
- Centered Over And Mounted to 4" J-Box (By Others)
- CSA Listed Dry Location For Wall Mount
- Dimmable to 10%
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- · Open Top & Bottom
- Steel Fascia with Matte Silver Powder Coat Finish



LINE DRAWING

Optional TCV / TBC Steel Top & Bottom Covers 7 3/4"

FINISHES

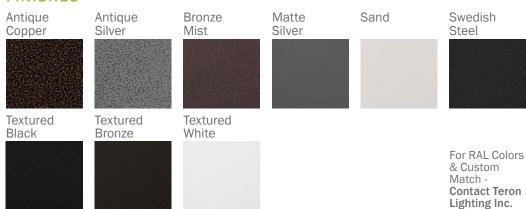





TIGER M LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE DIMMING DRIVER		
TGM - Tiger M L10.5-LT350 - (1) 10.5W (40) LED Module @ 350mA 2-Wire Trailing or Leading Edge Driver L15.0-ZE500 - (1) 15.0W (40) LED Module @ 500mA Low Voltage 4-Wire Dimming Electronic Driver L16.0-LT500 - (1) 16.0W (40) LED Module @ 500mA 2-Wire Trailing or Leading Edge Driver		100 - 277V (120 - 230V Dimmable)	Not Applicable	
TGM Example ^	L10.5-LT350	100 - 277V	Not Applicable	

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable ORDER INFO	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Texture Black BZ - Texture Bronze TW - Texture White	35K - 3500K Color Temp 40K - 4000K Color Temp	F - Fused TBC - Perforated Steel Top & Bottom Covers TCV - Perforated Steel Top Cover
Not Applicable	AC	30K	TCV

PROD	SOURCE	30K SPECS		
TGM	L10.5	30K - 3000K Color Temp 11615 LED Source Lumens 153.8 LED Source Lumens Per Watt		
	L15.0	30K - 3000K Color Temp 2307 LED Source Lumens 153.8 LED Source Lumens Per Watt		
	L16.0	30K - 3000K Color Temp 2486 LED Source Lumens 155.4 LED Source Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3042160	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004

