

CTL9816

Micro/Lyte™ Low Voltage Open Gimbal Track Fixture

Specifications/Features

Fixture

This fixture provides the excellent color and efficiency of MR16 Halogen lamps, as well as versatile aiming capability to achieve any desired accent lighting effect.

It features an attractive design with a unique 2-piece housing for convenient front relamping.

A rear open design allows for efficient lamp heat dissipation.

All styles are equipped with a convenient on/off switch and polarity indicator.

Each model must be used with LA2050N or LA2075N (120V-12V) transformer. (Sold separately)

Lamp/Electrical

(1) 75W MR16 Lamp (max).


On fixtures designed for use with MR16 lamps, ConTech Lighting provides a clear, tempered safety glass. This safety glass should only be used with open MR16 lamps, and not used with MR16 lamps that contain an integral glass lens. This safety glass should be removed if use of MR16 with front glass is required.

Warranty

This fixture is covered by ConTech's full one (1) year replacement guarantee after date of purchase.

Listing

cULus listed. Suitable for dry locations.

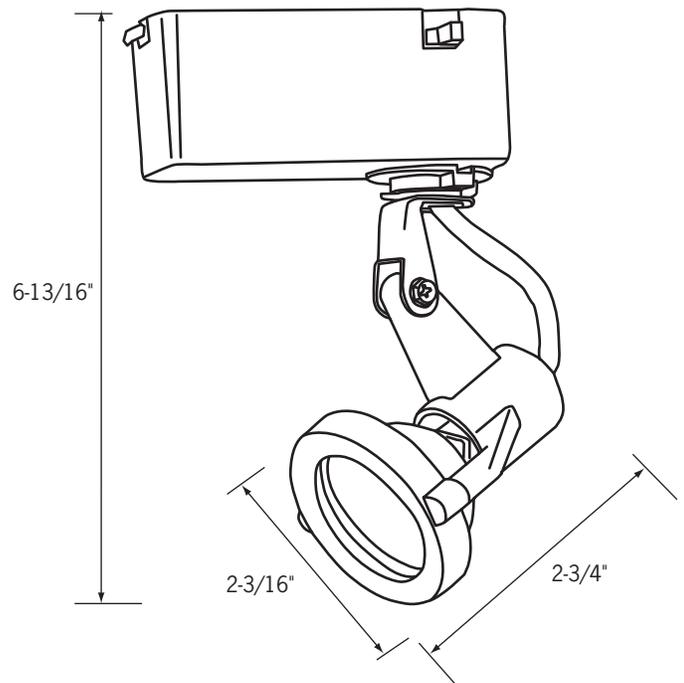

Ordering Information

Example Order: -

Fixture	Finish	Transformer	Accessories
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

CTL9816

B - Black
P - White

LA2050N-B - 50W Black Transformer
LA2050N-P - 50W White Transformer
LA2075N-B - 75W Black Transformer
LA2075N-P - 75W White Transformer

LF16- * 45MM - ***A, B, CL, G, LB, R, RO, Y, 73, LS, SL, UV**
1-3/4" Tempered glass lenses
FA-16 45MM - Honeycomb Louver
THS16 - Thermal Heat Shield

Color/Pattern Legend

-A (Amber), **-B** (Blue), **-CL** (Clear), **-LB** (Light Blue),
-R (Red), **-RO** (Rose), **-Y** (Yellow), **-73** (Spread Lens),
-LS (Linear Spread Lens), **-SL** (Soft Light),
-UV (Optivex UV Filter)