



FLUORESCENT CABLE SUSPENDED / SURFACE MOUNT

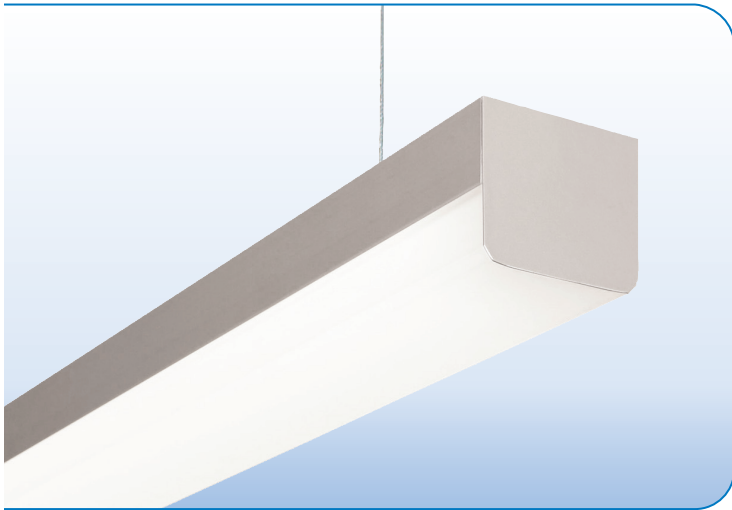

PROJECT: _____
 TYPE: _____



SPECIFICATIONS

HOUSING	Extruded aluminum housing up to 12' long.
FINISH	Satin anodized or white paint finish standard. Custom finish optional.
LENS	Extruded, snap-on clear and frosted linear prismatic serrated widespread lens.
GASKET	1/4" Neoprene gasket between endcap and lens prevents dirt/bug entry and light leak.
BALLAST	Integral 120V or 277V electronic ballast. Dimming ballast available.
K/O's	For surface mount only, 1/2" K/O at center back of fixture, one end, both ends or field drilled.
MOUNTING	SURFACE MOUNT: Mounting holes pre-drilled. CABLE SUSPENDED: Aircraft cable suspension kit (SK) 36" standard, other lengths available, aircraft cables mounted 6" from each end of the fixture. Prewired with 16/3 SVT cord.
CERTIFICATION	UL listed for damp locations. E211631 MADE IN THE USA

LAMPS & FIXTURE LENGTHS

LAMP TYPE	T5			
LAMP WATTAGE	14, 24W	21, 39W	28, 54W	35, 80W
LAMP DIMENSION	22 3/16"	33 7/8"	45 3/4"	57 9/16"
FIXTURE LENGTH	23"	35"	47"	59"
TANDEM FIXTURE LENGTH	N/A	69"	93"	117"

T8			
17W	25W	32W	40W
24"	36"	48"	60"
25"	37"	49"	61"
N/A	73"	97"	121"

T5, T8 = 1Lamp in Cross Section • 2T5, 2T8 = 2 Lamps in Cross Section • T5T, T8T Denotes Tandem

PART NUMBER

SERIES	WATTS	LENS	VOLTS	BALLAST	K/O & MOUNTING	OPTIONS	FINISH	LENGTH
ALX1-SQL-T5	REFER	C CLEAR	120	IS INST. START	<u>SURFACE MOUNT</u>	LS LIGHT SENSOR	S SATIN	REFER
ALX1-SQL-T5T	TO	W WHITE	277	PS PROG. START	B BACK CTR K/O	MS MOTION SENSOR	W WHITE	TO
ALX1-SQL-2T5	CHART	F FROSTED	UNV	<u>DIMMING</u>	E ONE END K/O	<u>EM-PACKS</u>	C CUSTOM	CHART
ALX1-SQL-2T5T	ABOVE			H3D HILUME	BE BOTH END K/O	EM 450L		ABOVE
ALX1-SQL-T8				ES ECOSYSTEM	FD FIELD DRILL	EM7 700L		
ALX1-SQL-T8T				ESH ECOSYSTEM H	<u>CABLE SUSPENDED</u>	EM14 1400L		
ALX1-SQL-2T8				2W 2 WIRE	SK36 36" CABLE KIT			
ALX1-SQL-2T8T				0/10 0/10 VOLTS	SK72 72" CABLE KIT			

Available for wet location. See outdoor lighting section.

Consult factory for LED options.