


Exterior LED Channel

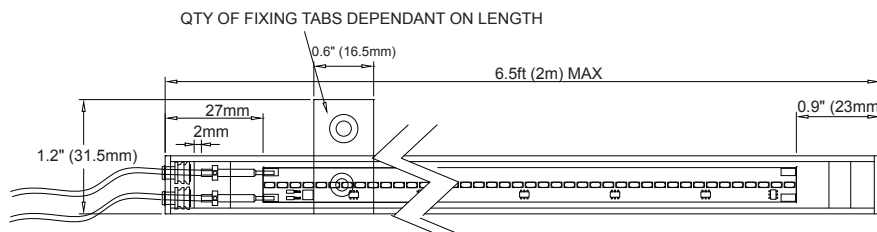

Micro LED strip fitted into 0.65" x 0.65" channel. IP66 rated for exterior use. Channel length up to 6.5ft (2m); strip comes in 1 inch (25mm) increments.

Materials: Aluminum, acrylic

Color Temp: 2700K, 3000K, 4000K

Lamp: MSL G3.2 Standard Output or MSL G3.2 High Output

CRI: ≥ 90

Finish: Anodized aluminum

Dimming: EldoLED 0-10V, DMX or Wallbox control

Supply: 24V DC from a dedicated driver (12V for red, yellow, green and amber)

Fixing: Via fixing tabs at either end or anywhere along the length (1 supplied every 20" (500mm) as standard) or via M3 linear thread anywhere along the back of the extrusion.

Deviations: Mounting options. Clear cover available as diffuser. Anything over 6.5ft (2m) will be supplied in more than 1 section.

G3.2 Standard Output

LEDs at 1.79mm centers / 280 LEDs per 20" (500mm) strip

Consumption: 5 W/ft (16.8 W/m)

Output: 456 lm/ft (1496 lm/m)


G3.2 High Output

LEDs at 1.79mm centers / 280 LEDs per 20" (500mm) strip

Consumption: 9.5 W/ft (31.2 W/m)

Output: 824lm/ft (2702 lm/m)

Alternative adjustable hinge mounts;

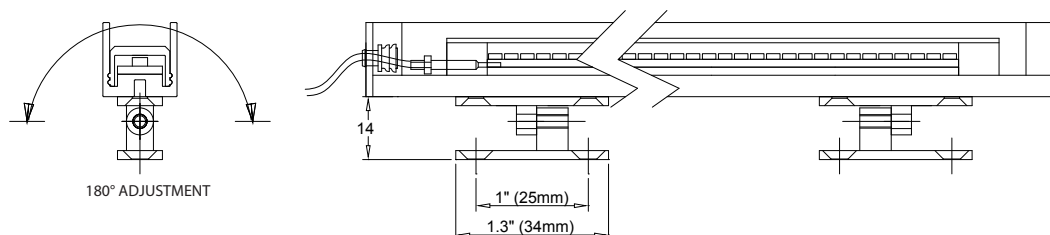

Order Code	series.col temp.output.length.dimming
Example	Ext channel.3000K.Standard.20".D010

Series	Color	Output	Length	Dimming and control	Mounting Options	Accessory Options
Exterior LED Channel	2700K 3000K 4000K	Standard...G3.2 5W/ft, 456lm/ft High.....G3.2 9.5W/ft, 824lm/ft	Specify length in 1 inch increments	D010.....0-10V DMX.....DMX WBC.....Wallbox control	Fixing tabs (standard) M3 linear thread Adjustable hinge 180°	FD...Frosted diffuser CD...Clear diffuser

