




Downlights | 1 x powerLED 4 W | CRI 92 | 2700K | Spot | Embossed white RAL 9003 |  
 Tilttable | Damp location | 350mA  
**LL-E81266-M-15**

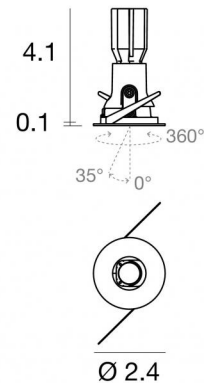

2.2

Technical data	
Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Spot
Light emission direction	downward
Power	4 W
Operation	350mA
Source lumens	395 lm
CCT	2700 K
Color rendering index	92 Ra
Safety class	Class 2
IP	IP44
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Dimmable article	No
Directional	No
Tilting	Yes
total angle (horizontal plane)	360 °
total angle (vertical plane)	35 °
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.56 ft
Resin potting	No
Type of light emission	Single emission
Net weight	0.28 lbs
Electrostatic discharge protection	No
Surge protection	No
Optics technology	F.O.L.
Product technological characteristics	TVS
Ordinary temperature on the glass	104 °F

Finishing casing	
Material	Die-cast Aluminum EN AB - 46100
Color	black
Process	Powder coating
Finishing diffuser	
Material	UV Resistant Polycarbonate
Color	transparent
Finishing flange	
Material	Die-cast Aluminum EN AB - 46100
Color	Embossed white RAL 9003
Process	Powder coating
Finishing radiator	
Material	Die-cast Aluminum EN AB - 46100
Process	Tumbling
Cables Electrification	
Cable connector	No

**Notes:**

---



---



---



---



---

Downlights | 1 x powerLED 4 W | CRI 92 | 2700K | Spot | Embossed white RAL 9003 |  
Tilttable | Damp location | 350mA | Base  
**LL-E81266-M-15**


Single emission downlights for indoor application. The super warm LED light source with a spot light distribution is composed of 1 powerLEDs with CCT of 2700 K and a CRI 92; the source luminous flux is 395 lm, with a 98.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP44; the total weight is of 0.282 lbs.

The total absorbed power is 4 W. The power supply cable is included and features a 0.558 ft lenght.

and can be ceiling-mounted, with a 2.205 in diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

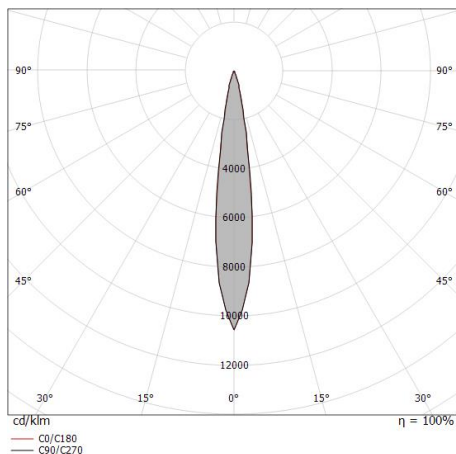

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.15 0.11	E(0°) 10226 E(C90) 7.7° 5025 E(C0) 7.6° 5016
1.0	0.27 0.27	E(0°) 2557 E(C90) 7.7° 1256 E(C0) 7.6° 1254
1.5	0.41 0.40	E(0°) 1136 E(C90) 7.7° 558 E(C0) 7.6° 557
2.0	0.54 0.53	E(0°) 639 E(C90) 7.7° 314 E(C0) 7.6° 313
2.5	0.68 0.67	E(0°) 409 E(C90) 7.7° 201 E(C0) 7.6° 201
3.0	0.81 0.80	E(0°) 284 E(C90) 7.7° 140 E(C0) 7.6° 139

— C0/C180 (Half-peak divergence: 15.2°)  
— C90/C270 (Half-peak divergence: 15.4°)

### Energy efficiency class

This product contains a light source of energy efficiency class F.

### Led features

Light Output Ratio (LOR)	61 %
Source lumens	395 lm
Delivered lumens	243 lm
Power	4 W
Luminaire efficacy	60 lm/W
Color temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Color rendering index	92 Ra
Black Body Locus	On

### LED Life / Failure Ratio

L70 B10 C0 247450h (at Tj 60 Ta 25 )

### UGR

UGR axial	13.8
UGR transversal	12.9
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Light distribution symmetry	Symmetrical
C0/C180 optics	15°

