


SLIM DIRECT

Housing: Circular aluminum profile with integrated acrylic cover downwards
 Design: SATTLER

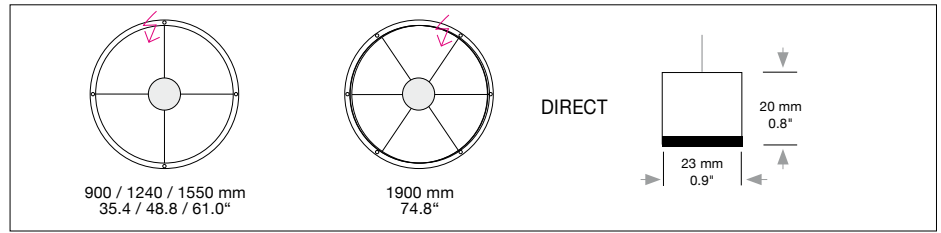


Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes												
Ø 900 mm	35.4"	55	2,574	3.5 / 7.7	711.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 1240 mm	48.8"	72	3,296	5.0 / 11.0	712.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 1550 mm	61.0"	88	3,597	5.5 / 12.1	713.	X X.	X X.	X X.	X X.	X X X.	X	
Ø 1900 mm	74.8"	110	5,123	6.0 / 13.2	714.	X X.	X X.	X X.	X X.	X X X.	X	
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Extra warm-white	3000 K 4000 K 2700 K 2200 K*	((Standard) (Optional) (Optional) (Optional)	X X X. X X X. X X X. X X X.	30. 40. 27. 22.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X X. X X X. X X X. X X X.	X X X X	
		RGB color control**		(Optional)	X X X.	60.	X X.	00.	X X.	X X X.	X	
		** (only in combination with dimming DMX, DALI)										
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	X X X. X X X. X X X.	X X. X X. X X.	51. 31. 71.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X X X	
Finishes												
(Standard)	11 white	(Optional)	22 aluminum polished	27 brush-finished aluminum	30 anthracite	32 crocodile black						
			35 gold	36 brass	37 bronze fine textured	38 copper						
						10 black fine textured						
						XX Custom finish	X X X.	X X.	X X.	X X.	X X X. X X X.	X
Power Supply Cable												
(Standard)	000 without Mounting Version F	(Optional)	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black						
			Z 74 orange	Z 75 red	Z 76 green		X X X.	X X.	X X.	X X.	X X X. X X X.	X
			When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank									


1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.

SLIM DIRECT


Housing: Circular aluminum profile with integrated acrylic cover downwards
Design: SATTLER

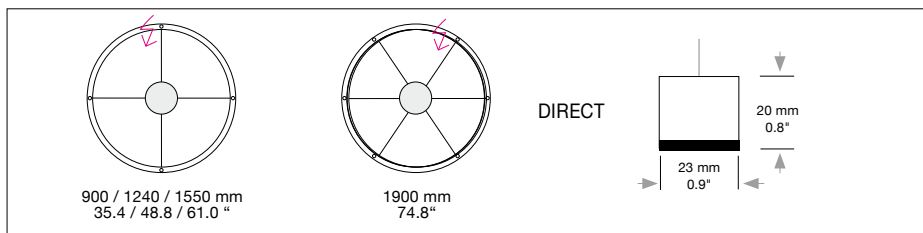


Mounting Version




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 39'4".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Dimensions of external power supply units


Typ	Size mm / inch	For use with Mounting Version
	L W H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K

Dimensions of canopy (1 LED Stripe)

Typ	Size mm / inch	For use with Mounting Version
	Ø cover plate / body	
DB 230	Ø 230 / 210 mm / 9.5 x 8.3" up to size Ø 900 mm / 35.4"	B, E, F
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1550 mm / 61.0"	B, E, F
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 1900 mm / 74.8"	B, E, F
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1550 / 61.0"	S, T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8" up to size Ø 1900 / 74.8"	S, T

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.




Optional



LED spot in canopy
(SLIM size Ø 900 mm / 35.4", Dimension canopy DB 290)
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A, G

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11. (white)