


## ELLIPSE half-shell


Housing: Aluminum profile, L-shaped acrylic cover  
Design: SATTLER

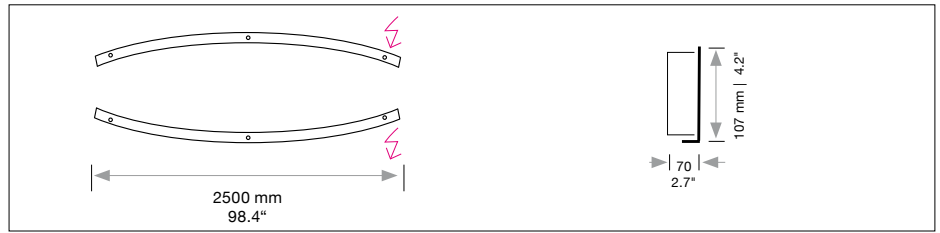


Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>3)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version										
<b>Sizes</b> 2500 x 107 Consisting of 2 half-shells Further sizes on request	98.4 x 4.2	84	6,917	17 / 37.5	<b>240.</b>	x x x.	x x x.	x x x.	x x x.	x x x x.	x										
<b>LED</b> 24V CRI > 80		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	x x x x. x x x x. x x x x. x x x x. x x x x. x x x x. x x x x. x x x x.	<b>40.</b> <b>50.</b> <b>30.</b> <b>27.</b> <b>22.</b> <b>65.</b> <b>60.</b> <b>60.</b>	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x. x x x x. x x x x. x x x x. x x x x. x x x x. x x x x. x x x x.	x x x x x x x x											
<b>Dimming</b>		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	x x x x. x x x x. x x x x.	x x x. x x x. x x x.	<b>51.</b> <b>31.</b> <b>71.</b>	<b>00.</b> <b>00.</b> <b>00.</b>	x x x. x x x. x x x.	x x x x. x x x x. x x x x.	x x x										
<b>Finishes</b> (Standard)		11 white (Optional)		22 aluminum polished 	30 anthracite 	27 brush-finished aluminum 	32 crocodile black 	33 sand silver fine textured 	35 gold 	36 brass 	37 bronze fine textured 	38 copper 	10 black fine textured 	40 brass patinated 	42 bronze patinated 	44 wood veneer, white borders 	XX Custom finish	x x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x x. x x x x. x x x x. x x x x.	x x x x
<b>Power Supply Cable</b> (Standard)		Z 70 Silver (Optional)		Z 71 white 	Z 72 grey 	Z 73 black 	Z 74 orange 	Z 75 red 	Z 76 green	x x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x x. x x x x. x x x x. x x x x.	x x x x. x x x x. x x x x. x x x x.	x x x x. x x x x. x x x x. x x x x.	x x x x. x x x x. x x x x. x x x x.	x x x x. x x x x. x x x x. x x x x.	x x x x				

## ELLIPSE half-shell


Housing: Aluminum profile, L-shaped acrylic cover  
Design: SATTLER

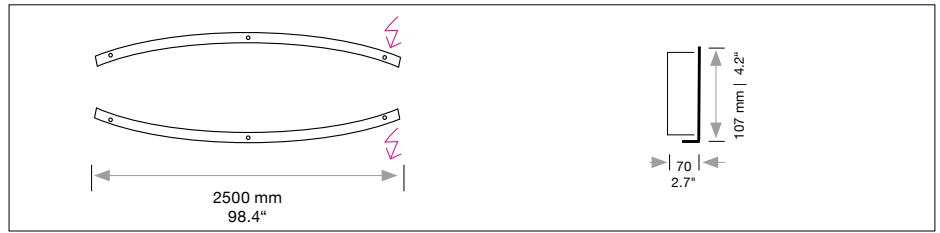


### Mounting Version




2 x 3 point suspension with external power supply unit in suspended ceiling



2 x 3-point suspension with external power supply unit in separate canopy



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.


A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 5000mm / 197"  
and power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number


Dimensions of external power supply units (1 LED Stripe)			
Typ	Size mm / inch		For use with Mounting Version
	L	W H	
DE 1F	360 x 150	85 mm / 14.2 x 5.9	x 3.3" A, G,



Dimensions of canopy (1 LED Stripe)		
Typ	Size mm / inch	For use with Mounting Version
	Ø cover plate / body	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	B, H

Canopy finish: white (11) contact factory for other finishes


USA/Canada: Canopy mounts to 4" octagonal junction box.



Input voltage for all external power supply units and canopy is 120 / 277 VAC 50/60 Hz

### Optional

2 x



Ceiling fixation for mounting version A (2 necessary)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

