

# 60 Round Downlight LED - Chicago Plenum/IC Specifications



## Ordering Information

Model	LED <sup>1,2</sup>	Rated Lumens <sup>3</sup>	Beam Angle	Voltage	Power Supply <sup>4</sup>	Diffuser	Options
WG-P60RDL plaster-in	80 CRI CB-827	L	30	UNV	X	CD	AS
WG-B60RDL bezel trim	CB-830	M	40		S	FD (80° Beam Only)	HL
	CB-835	H	80		D010	FR (80° Beam Only)	CP
	CB-840				D3W <sup>5</sup>	MP	IC
	CB-840				DES <sup>5</sup>	OA	
	90 CRI CB-927			120	DFPN <sup>5</sup>		
	CB-930						
	CB-935						
	CB-940						
	95 CRI CB-F927						
	CB-F930						
	CB-F935						
	CB-F940						

### Luminaire

- Bezel trim or trimless 'plaster-in' 2.4" round Downlight for drywall ceilings and tiles.
- Installation housing for Chicago plenum or insulated ceilings.
- Machined die-cast aluminum LED insert with twist lock.
- Tool free lamp maintenance.
- Regressed open aperture standard, other diffusers/options available (see diffusers/options).
- Powder coat painted white - RAL 9010.

### LED<sup>1,2</sup>

- 80+ CRI (Low/Medium/High Power)
- CB-827 = 2700K, 1045/1233/1540lm
- CB-830 = 3000K, 1045/1233/1540lm
- CB-835 = 3500K, 1091/1311/1698lm
- CB-840 = 4000K, 1091/1311/1698lm
- For 90+ CRI specify, CB-927, CB-930, etc. Approximately 15% less lumens than 80 CRI.
- For 95+ CRI specify, CB-F927, CB-F930, etc. Approximately 30% less lumens than 80 CRI.

### Power<sup>3</sup>

- L = Low Power, 6.8W @ 400mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

### Beam Angle

- 30 = 30° accent illumination
- 40 = 40° general illumination
- 80 = 80° general illumination

### Voltage

- UNV = 120-277V
- 120 = 120V

### Power Supply (remote)<sup>4</sup>

- X = No driver.
- S = Standard non-dim driver, 120-277V.
- D010 = EldoLED, 1%, 0-10V dimming, 120-277V.
- D3W = Lutron, 1%, 3-wire dimming, 120V-277V.<sup>5</sup>
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V.<sup>5</sup>
- DFPN = Lutron 1% forward phase with neutral, 120V only.<sup>5</sup>

### Diffuser (Open Aperture standard)



- CD = Regressed Clear Diffuser
- FD = Flush Frosted Diffuser
- FR = Regressed Frosted Diffuser
- MP = Regressed Micro Prismatic Diffuser
- OA = Open Aperture

### Emergency

- Emergency LED driver available, order separately.

### Options


- AS = Accessory Snoot
- HL = Hex Louver
- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Plate available, contact factory

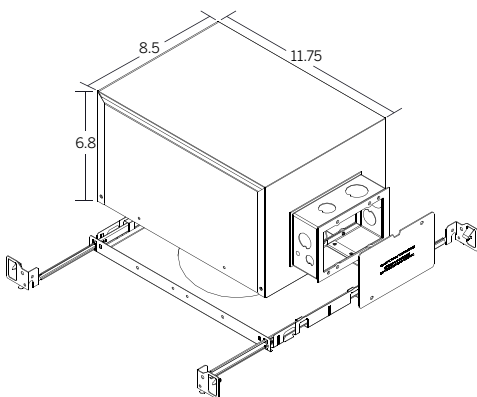

cut-out dimensions  $\varnothing$  2 3/4"




# 60 Round Downlight LED - Chicago Plenum/IC Dimensions

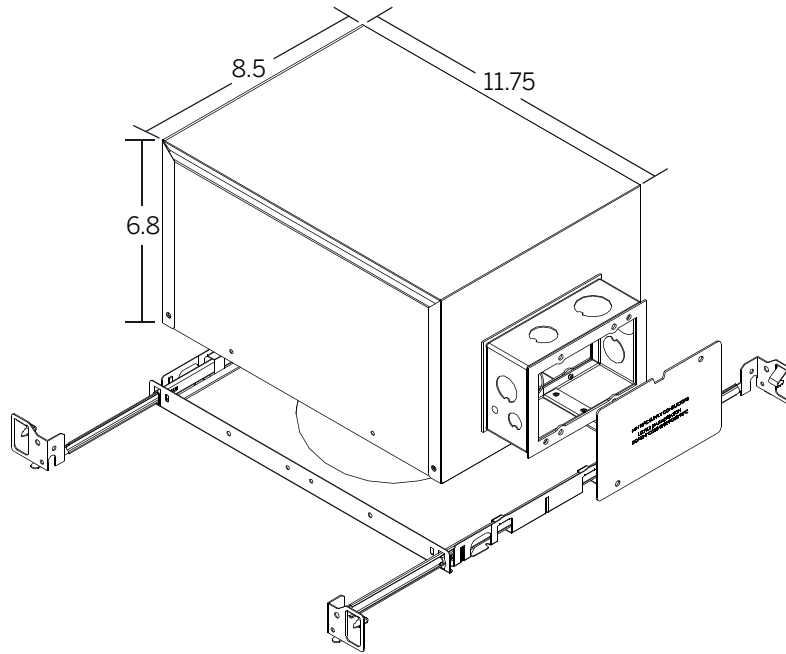


See power supply page for details.

## Plaster-in instructions

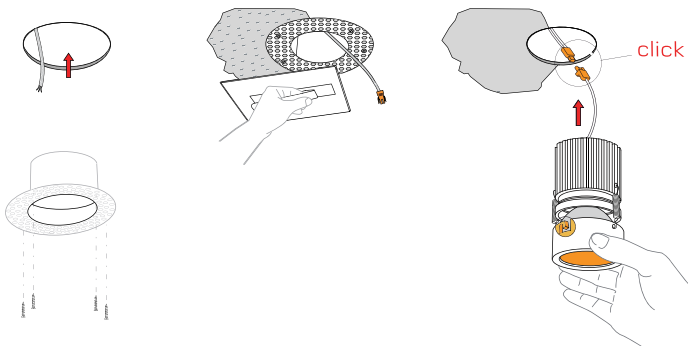


## Bezel instructions

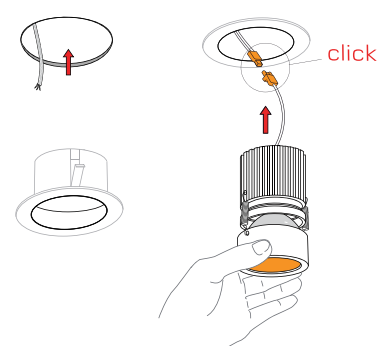


# 60 Round Downlight LED - Chicago Plenum/IC Power Supplies


S (Standard non-dim)



D010 (EldoLED 0-10V)




DFPN (Lutron forward phase with neutral)

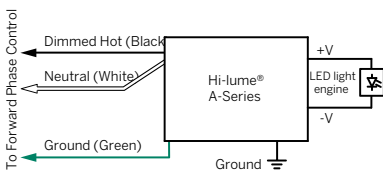


Note: Colors shown correspond to terminal blocks on driver.

DW3 (Lutron 1%, 3-wire)

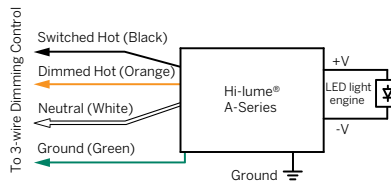

DES (Lutron EcoSystem® digital)

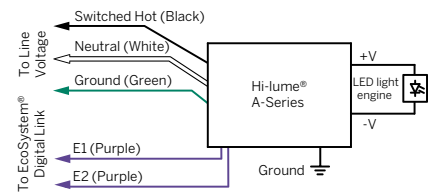

Note: Colors shown correspond to terminal blocks on driver.

Note: Colors shown correspond to terminal blocks on driver.