





60 Round Downlight Specifications



2.4 inch round recessed luminaire with bezel trim or trimless 'plaster-in' for absolute minimal visual impact.



cut-out dimensions \varnothing 2 3/4"

Ordering Information¹

Model	Lamp	Watts	Voltage	Power Supply ²	Options
WG-P60RDL plaster-in	LVR low voltage halogen	20	120	DELV	CG FR MP FG
WG-B60RDL bezel trim	MR16 GU5.3		12	X no power supply (for magnetic order below)	

¹Specify remote power supply separately below. ²See power supply pages for details.

Luminaire

- Bezel trim or trimless 'plaster-in' for drywall ceilings.
- Installation from below for remodel or new construction.
- Twist lock diecast aluminum lamp insert module.
- Heavy gauge steel trim housing.
- Tool free lamp maintenance.
- Open aperture standard, other lenses, available (see options).
- Powdercoat painted white - RAL 9010.
- Suitable for damp locations. (Flush glass diffuser suitable for outdoor under canopy.)

Lamp

- LVR = low voltage halogen MR16 GU5.3 (open aperture compatible with LED MR16)

Watts

- 20 = 20W

Voltage

- 120 = 120V
- 12 = 12V load (MR16)

Options

- CG = clear glass
- FR = regressed frosted glass
- MP = regressed micro prismatic glass
- FG = flush frosted glass

Power Supply²

DELV = Electronic low voltage remote driver 120V = 60W, class 2, dimmable (1 per fixture included)


Specify X above and order Magnetic low voltage dimmable transformers separately below

- T-540-10002 = 300W, 12VAC, 120V, class 2, 5 lamps, remote transformer³
- T-540-10017 = 300W, 12VAC, 277V, class 2, 5 lamps, remote transformer³
- T-540-10015 = 500W, 12VAC, 120V, class 2, 8 lamps, remote transformer⁴
- T-540-10014 = 500W, 12VAC, 277V, class 2, 8 lamps, remote transformer⁴


³See power supply pages for details. ³Up to 5 fixtures controlled per dimmer/switch.

⁴Up to 8 fixtures controlled per dimmer/switch.

60 Round Downlight Dimensions

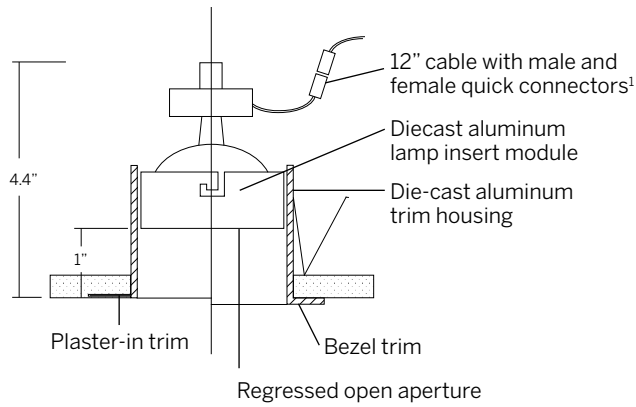

Lamp module insert with standard open aperture

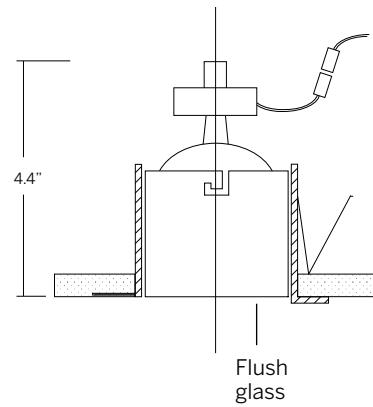


Frame and insert with optional frosted flush glass


cut-out dimensions \varnothing 2 3/4"

¹Connectors included. Class II low voltage wire supplied by others. See power supply page for details.

Plaster-in instructions


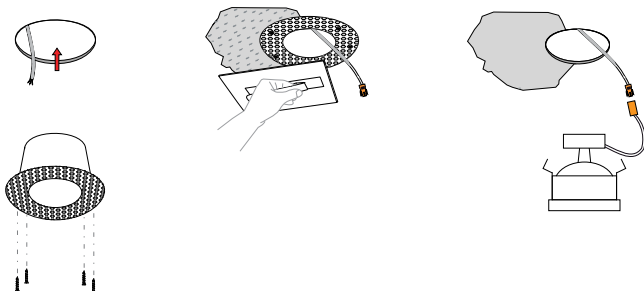


Bezel instructions





DELV (Electronic LV driver)

120V dimmable electronic low voltage driver.
 Class 2 driver, maximum distance 10'.
 Supplied with enclosure (shown right).

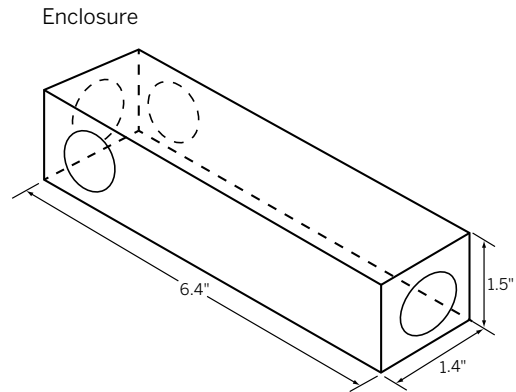

Magnetic LV transformer Class 2, UL 2108, fully dimmable

300W
 # T-540-10002 (120V)
 # T-540-10017 (277V)
 weight 10 lbs.

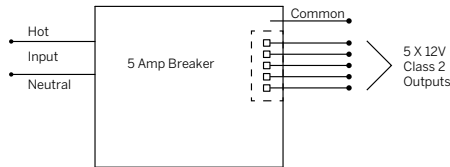

500W
 # T-540-10015 (120V)
 # T-540-10014 (277V)
 Weight 19 lbs.

