



Recessed VANITYLITE is inconspicuous yet effective.



VANITYLITE creates no glare on mirror surface.

Celestial Lighting's VANITYLITE offers the ultimate solution for illuminating the vanity area, one of the most difficult lighting applications.


The patented VANITYLITE was designed by a renowned lighting designer to provide superior illumination and color rendering of the face and body, while eliminating shadows and aperture brightness.

Recessed into the ceiling or soffit above the mirror, the fixture incorporates an inconspicuous elliptic reflector that directs light onto the person without glare on the mirror surface. There are no unsightly egg crates or louvers, and the lightsource is completely concealed.

VANITYLITE uses color-corrected 55-watt compact fluorescent lamps (82 CRI), positioned to create maximum light output as well as a seamless, shadow-free light. The lamps are powered by silent, high power factor, electronic ballasts for universal voltage. (Dimming option available.)

The heavy-gauge aluminum housing provides structural integrity and resistance to corrosion, while remaining lightweight for easier installation.


A new, hinged striplight allows for simple lamping.

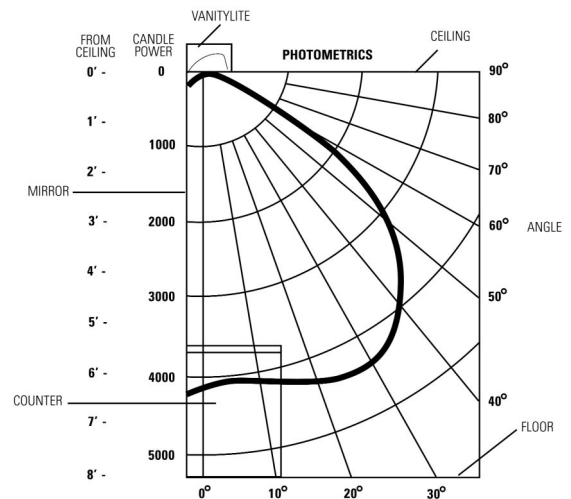


Use 55-Watt Compact Fluorescent Lamps (2G11 Base)

Lamp code:	FT55DL (Sylvania)
Initial lumens per lamp:	4800
Mean lumens per lamp:	4128
Color Rendering Index:	82
Available color temperatures:	3000K, 3500K, 4100K
Average rated life:	12000 hours

INSTALLATION OPTIONS

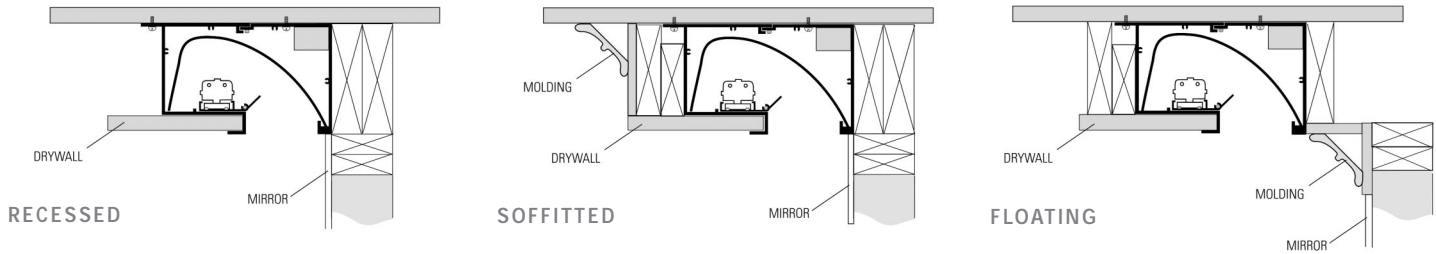

DIMENSIONS

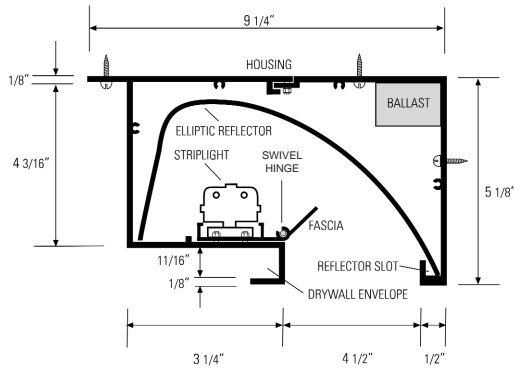

INSTALLATION INSTRUCTIONS

- 1) Remove elliptic reflector from housing by dislodging from reflector slot and prying out.
- 2) Screw mount housing onto secure locations in ceiling and wall (beam, truss, header, stud etc.) Recommended screw positions shown left.
- 3) Finish drywall work around housing. Allow opening for conduit at end of fixture. Knockout provided on end fitting.
- 4) Connect lead wires to power supply. Do not power until installation and lamping are complete.
- 5) Insert reflector.
- 6) Insert lamps.

STANDARD FIXTURES

PRODUCT CODE	FIXTURE LENGTH	LAMP CONFIGURATION (FOR SHADOW FREE LIGHT)
VAN47	47"	
VAN67	67"	
VAN86	86"	
VAN106	106"	
VAN125	125"	

LAMPING INSTRUCTIONS

- 1) Hold fascia and gently rotate downward to expose striplight. For longer VANITYLITES, hold fascia at both ends of fixture when rotating.
- 2) Insert or replace lamps. Ensure that lamps are locked into sockets and secured by clips.
- 3) Support underside of fascia and rotate upward.



VAN47	VAN67	VAN86	VAN106	VAN125	CONSULT FACTORY FOR CUSTOM LENGTHS
PROJECT NAME			CONTRACTOR		
FIXTURE SCHED. TYPE			DISTRIBUTOR		
SPECIFIER			REPRESENTATIVE		