

FCF1106

6" Round high powered flood light outdoor



(Shown w/Cut-Off Visor)



Made in USA with domestic & globally sourced components

FEATURES

- Up to 3620 lm @ 26W, Over 100 LPW
- Wide range mounting options
- Many optical accessories
- Tempered glass lens
- IP66 rated
- 1.5G Vibration Tested
- 93 CRI with 2 SDCM

PERFORMANCE

Beam Spread: 10° | 15° | 25° | 40° | 60° | 120°

CCT Options: 2700K, 3000K, 3500K, 4000K, 5000K, Red, Green, Blue

CRI: 93 CRI

Consistency: 2 SDCM (Fixture to Fixture)

Lumens: 3620 lm

Lifetime: > 70,000 hours / L70 or better

ELECTRICAL

Voltage: Universal 120–277V AC

Power Supply: Integral Class II, electronic high-power factor > .90 @120V


Power Consumption: 26W @ 120V

Dimming: 0-10V Dimming

Certification: CEC Title 24 - JA8 Compliant

Standards: cETLus Listed, CE, NOM, tested to UL 1598 and UL 8750 standards / UL-Class I / IES LM-79 / LM-80

PHYSICAL DIMENSIONS

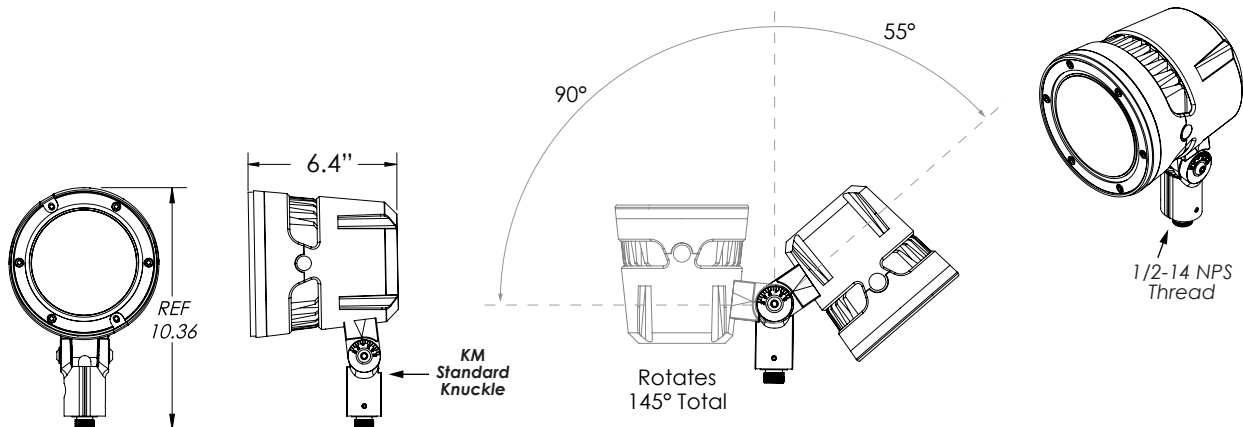

FCF1106

PRODUCT CODE

EXAMPLE: FCF1106-UNV-27K-CRI90-36L-BKE-10-LD-CV6-KM

MODEL	VOLTAGE	CCT	CRI	LUMENS	FINISH	OPTICS	OPTIONS	TRIM	MOUNT
FCF1106									
MODEL FCF1106				LUMENS nominal 36L 3620 lm (26W)		OPTIONS LD 0-10V Dimming PE Photo Eye (120V Only) (Not used with Y6)			
VOLTAGE UNV Universal 120-277 Volt AC 120V 120 Volt AC (PE Option)				FINISH BKE Black (AAMA 2604) BRE Bronze (AAMA 2604) SLE Silver (AAMA 2604) WHE White (AAMA 2604) CCE Custom Color (AAMA 2604)		TRIM CV6 Cut-Off Visor CV6-RG6 Cut-Off Visor w/Rock Guard LSN6 Long Snoot LSN6-SF6 Long Snoot w/Screen Frame RG6 Rock Guard SN6 Snoot Enclosed Glass Front Lens			
CCT 27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K R Red G Green B Blue						MOUNT Pick one of the below. KM Medium Knuckle Mount (Standard) AS Architectural Surface Mount AS-BASE Architectural Surface Mount w/ Base CAF-6 Cantilever Arm - 6" CAF-12 Cantilever Arm - 12" HGS Heavy Duty Ground Stake JB Junction Box (Outdoor Rated) PF Post Top Fitter SB Surface Base Mount SF238 Slip Fitter TM Tree Mount Y6 Yoke Arm (Removes Knuckle)			
CRI CRI90 CRI 90				OPTICS nominal 10 Narrow Spot 10° 15 Spot 15° 25 Medium Spot 25° 40 Medium Flood 40° 60 Flood 60° 120 Wide Flood 120°					

*** Must specify mount as part of catalog number. Mounts may not be convertible from one to another without rework at the factory. ***

FCF1106

LUMENS






Model	Watts	4K
FCF1106	26W	3620 lm

IES Multiplier	
Color	Multiplier
927	0.93
930	0.97
935	0.99
940	1.00

*83CRI≤1.15 Consult factory.


0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Diva DVSTV-XX
	Diva DVSTV-453PH-WH1
Leviton	Illumatech 010-IP710-DLZ

PHOTOMETRICS

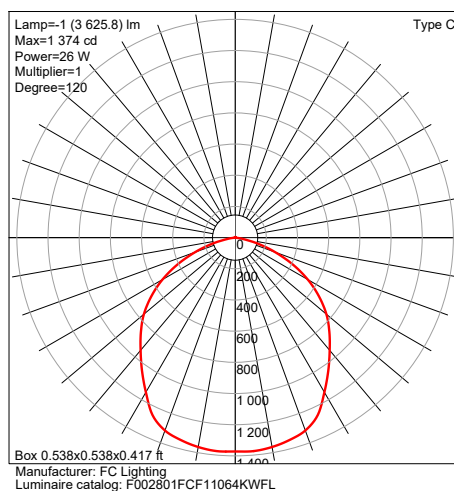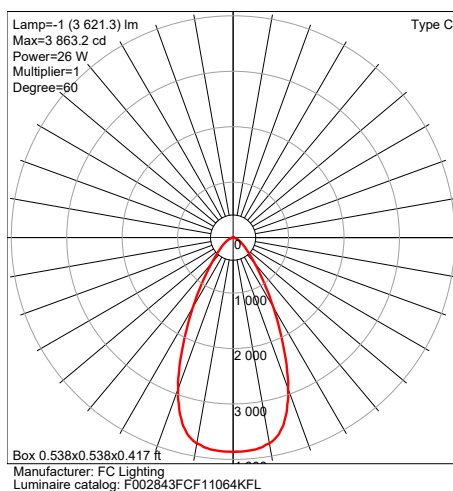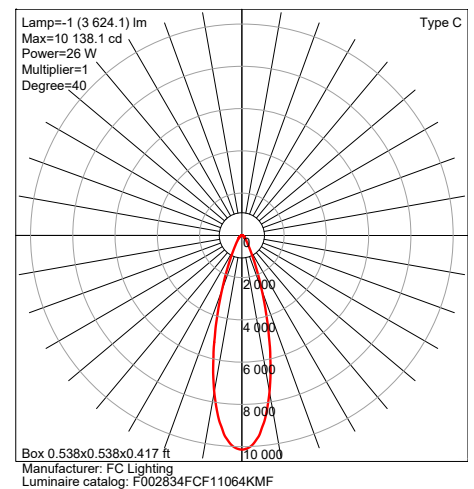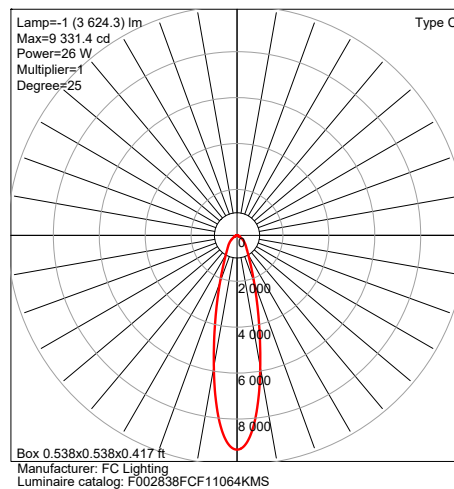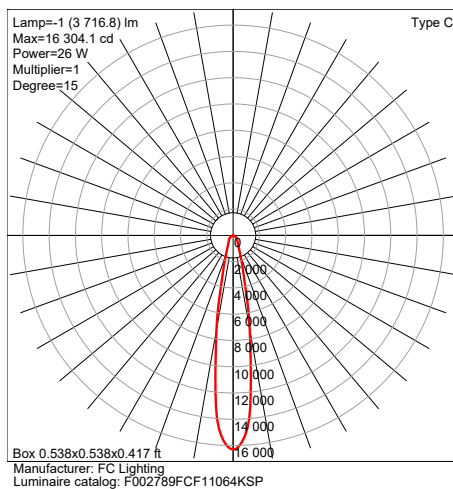

Due to continuous development and improvements, specifications are subject to change without notice. FC Lighting reserves the right to change lab test details or specifications without notice. Product use certifies agreement to Solid State Luminaires terms and conditions. All stated specifications have a tolerance of +/- 7%.

© FC Lighting, Inc. 3609 Swenson Ave • St. Charles, IL • 60174 | fclighting.com | 800.900.1730


 US Commercial Lighting Manufacturer Since 1982

AG-DM-091922


FCF1106

TRIM


CV6 Cut-Off Visor

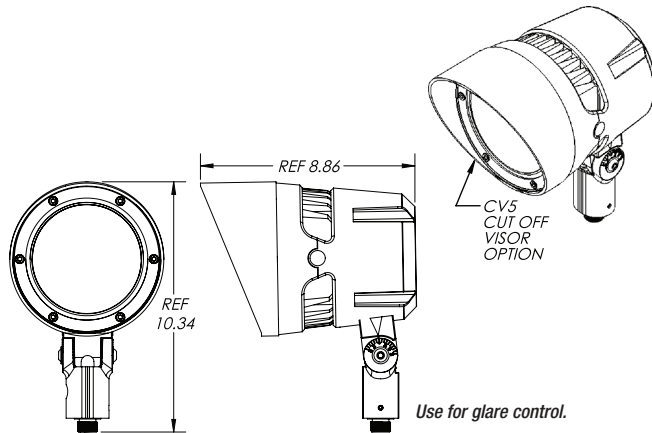


CV6-RG6 Cut-Off Visor w/Rock Guard

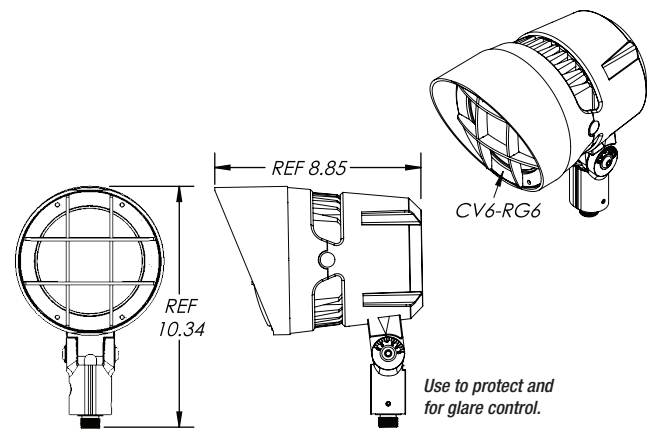


LSN6 Long Snoot

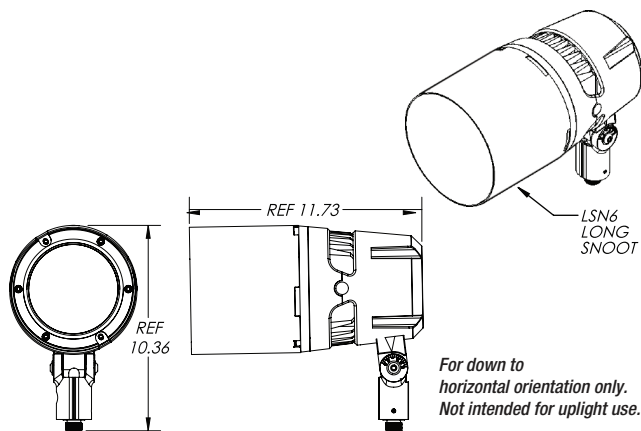

LSN6-SF6 Long Snoot w/Screen Frame

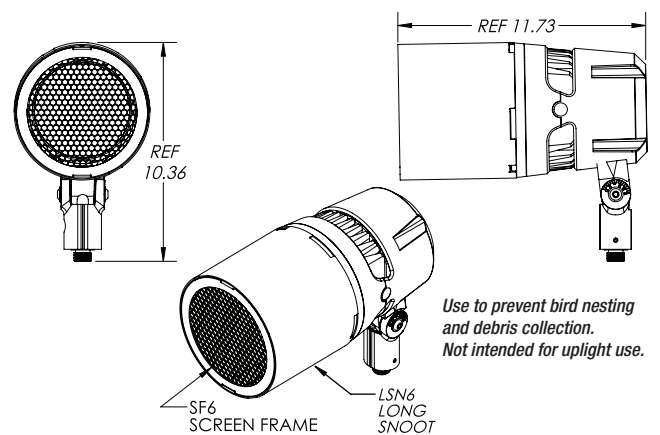


RG6 Rock Guard

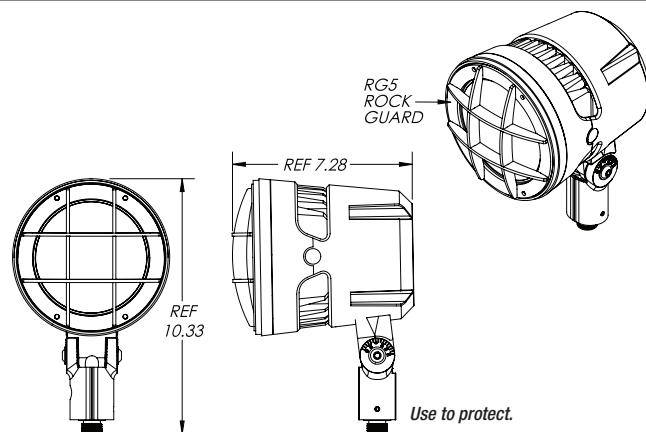

SN6 Snoot Enclosed Glass Front Lens

Enclosed snoot. Used in any orientation.
Will not collect water or debris in uplight orientation.

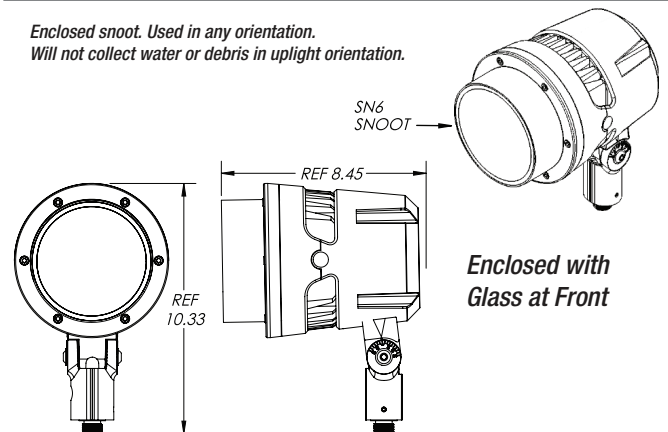


FCF1106

MOUNTING ACCESSORIES


SF238 Slip Fitter

Slip-fit tenon
adapter for 2-3/8" tenon
(supplied by others)

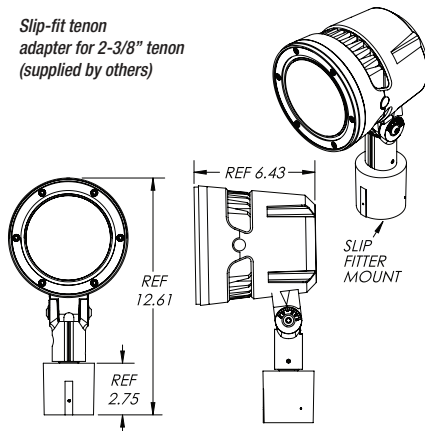

TM Tree Mount

Includes strap
to wrap a tree.

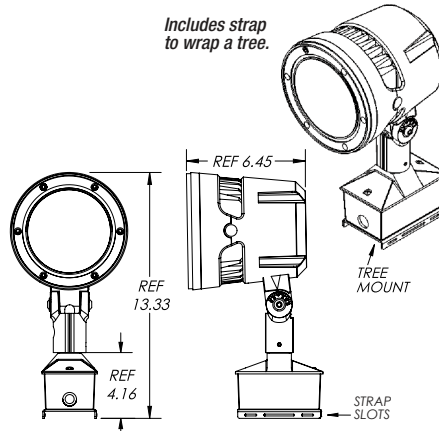

Y6 Yoke Arm (Removes Knuckle)

