



Top View



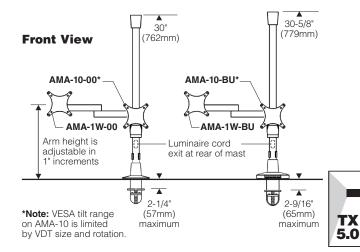

Specifications

- A Configurable base
- **B** USB desk clamp base with 4-port USB 2.0 hub

stanchion-mountable luminaires.

- C USB extension cable
- **D** USB power booster

Application:

Mounting:

- **E** Mast, 1-3/16" (30mm) dia.
- **F** Luminaire fitting, with (4) luminaire mounting screws
- G Stackable mount

Support for tambient Style L305 mast-mountable luminaires.

Includes four (4) mounting screws for luminaire attachment.

Provides for support and positioning of one (1) visual display

Configurable base for clamping to desk edge, grommet hole,

or bolt-through work surface. See maximum work surface thickness at right. Maximum work surface thickness for bolt-

terminal. VDT not included. Not compatible with Style L305

- H Dual-link arm for VDT up to 20 lbs (9 kg)
- J Cable manager under arm, typical
- K Cable clip

Pivoting tilter with VESA mounting plate, 75mm/100mm, (4) M8x1/2" screws included. Vertical tilt*: 45° down, 90° up. Rotation: landscape to portrait. (*see note, Front View diagram)

Electrical (AMA-10-BU and AMA-1W-BU):

USB extension plugs into computer/docking station to enable (4) USB 2.0 ports for computer peripherals. Computer/docking station not included. USB extension must be connected to a (docked) computer and USB power booster must be plugged into a 120V power outlet to enable device charging via USB hub.


Finish:

Electrostatically applied thermoset polyester powder coat.

How to Order

Part number format: AMA - (configuration) - (base) - (finish)

Note: For use with Style L305 mast-mountable luminaires only. Luminaires ordered and priced separately. Refer to luminaire data sheets for details.



10 = Round mast with pivot bracket for VDT **1W** = Round mast with dual-link arm for VDT

tambient from The Lighting Quotient

114 Boston Post Road, West Haven, Connecticut 06516, USA

Voice 203.931.4455 • Fax 203.931.4464 • thelightingquotient.com



through is 1-1/4".