



AMA-2W-00

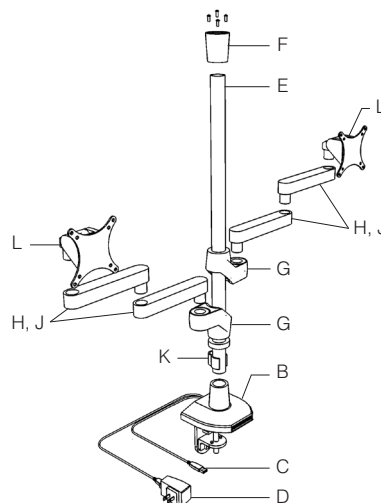


AMA-2W-BU

Top View

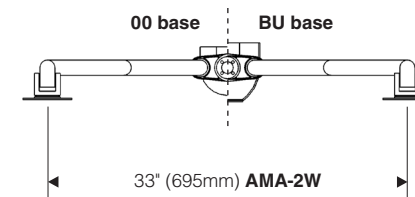

Front View

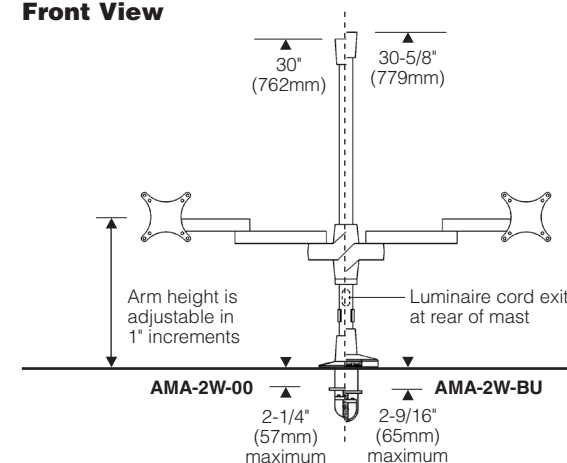TX
6.0

Specifications

A Configurable base	E Mast, 1-3/16" (30mm) dia.	H Dual-link arm for VDT up to 20 lbs (9 kg)	L Pivoting tilter with VESA mounting plate, 75mm/100mm, (4) M8x1/2" screws included. Vertical tilt: 45° down, 90° up. Rotation: landscape to portrait.
B USB desk clamp base with 4-port USB 2.0 hub	F Luminaire fitting, with (4) luminaire mounting screws	J Cable manager under arm, typical	
C USB extension cable	G Stackable mount	K Cable clip	
D USB power booster			

Application:

Support for **tambient** Style L305 mast-mountable luminaires. Includes four (4) mounting screws for luminaire attachment. Provides for support and positioning of two (2) visual display terminals. VDTs not included. Not compatible with Style L305 stanchion-mountable luminaires.

Mounting:

Configurable base for clamping to desk edge, grommet hole, or bolt-through work surface. See maximum work surface thickness at right. Maximum work surface thickness for bolt-through is 1-1/4".

Electrical (AMA-2W-BU):

USB extension plugs into computer/docking station to enable (4) USB 2.0 ports for computer peripherals. Computer/docking station not included. USB extension must be connected to a (docked) computer **and** USB power booster must be plugged into a 120V power outlet to enable device charging via USB hub.

Finish:

Electrostatically applied thermoset polyester powder coat.

How to Order

Part number format: **AMA - (configuration) - (base) - (finish)**

Note: For use with **Style L305** mast-mountable luminaires only. Luminaires ordered and priced separately. Refer to luminaire data sheets for details.

AMA-2W -	-	-	Round mast with 2 dual link arms for 30" VDTs
		PL	Semigloss platinum
		02	Semigloss white
		19	Vista flat black
	00		Configurable base
	BU		USB base