



CATALOG #

ACRYLIC BEAMS - LINEAR PENDANT



LED MODULE

- Samsung LED
- 3000K, 3500K, 4000K • >80 CRI
- LN2 Minimum of 3000 delivered lumens at 22 watts
- LN4 Minimum of 6500 delivered lumens at 46 watts

DRIVER OPTIONS

Programmable driver (dim to 0%)
*Consult factory for other wattages

CONSTRUCTION

20 GA Steel with Integral Driver

ELECTRICAL

120-277V input power supply.

LISTING

UL for US and Canada. Suitable for damp location

WARRANTY

5 Year Full Warranty

MOUNTING

Stem (24" stem 45 degree swivel)
Cable (120" adjustable aircraft cable)

ADDITIONAL OPTIONS

Sensors
Joiner block

BUILD YOUR PRODUCT

Grayed areas are codes for creating your lighting catalog #
EXAMPLE CATALOG # BMS-24L-S-LN2/LN2-30-8/SCK-LN-S

STYLE	SIZE	FINISH	LIGHT SOURCE	LIGHT SOURCE	COLOR TEMP.	CRI
<input type="checkbox"/> BMS	<input type="checkbox"/> 24L	<input type="checkbox"/> S Silver <input type="checkbox"/> W Wood <input type="checkbox"/> Z Bronze	<input type="checkbox"/> LN2 2ft Linear Fixture	<input type="checkbox"/> LN2	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 >80
<input type="checkbox"/> BMS	<input type="checkbox"/> 48L	<input type="checkbox"/> S Silver <input type="checkbox"/> W Wood <input type="checkbox"/> Z Bronze	<input type="checkbox"/> LN4 4ft Linear Fixture	<input type="checkbox"/> LN4	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 >80

MOUNTING		FINISH	ADDITIONAL OPTIONS	
<input type="checkbox"/> SCK-LN	Stem Kit	<input type="checkbox"/> S Silver	<input type="checkbox"/> CHA-EM-ITA	Emergency Back Up**
<input type="checkbox"/> CCK-LN-F/NF	Cable Kit (F=FEED NF=NON-FEED)	<input type="checkbox"/> B Black	<input type="checkbox"/> SPL-BOX-W	Splice box for joining fixtures
		<input type="checkbox"/> W White	<input type="checkbox"/> (blank)	No

**field installed

*** Specifications subject to change without notice.

ACRYLIC BEAMS - LINEAR PENDANT



LED MODULE

- Samsung LED
- 3000K, 3500K, 4000K • >80 CRI
- LN2 Minimum of 3000 delivered lumens at 22 watts
- LN4 Minimum of 6500 delivered lumens at 46 watts

DRIVER OPTIONS

Programmable driver (dim to 0%)
*Consult factory for other wattages

CONSTRUCTION

20 GA Steel with Integral Driver

ELECTRICAL

120-277V input power supply.

LISTING

UL for US and Canada. Suitable for damp location

WARRANTY

5 Year Full Warranty


MOUNTING

Stem (24" stem 45 degree swivel)
Cable (120" adjustable aircraft cable)

ADDITIONAL OPTIONS


Sensors
Joiner block

ADDITIONAL SHADE DIMENSIONS

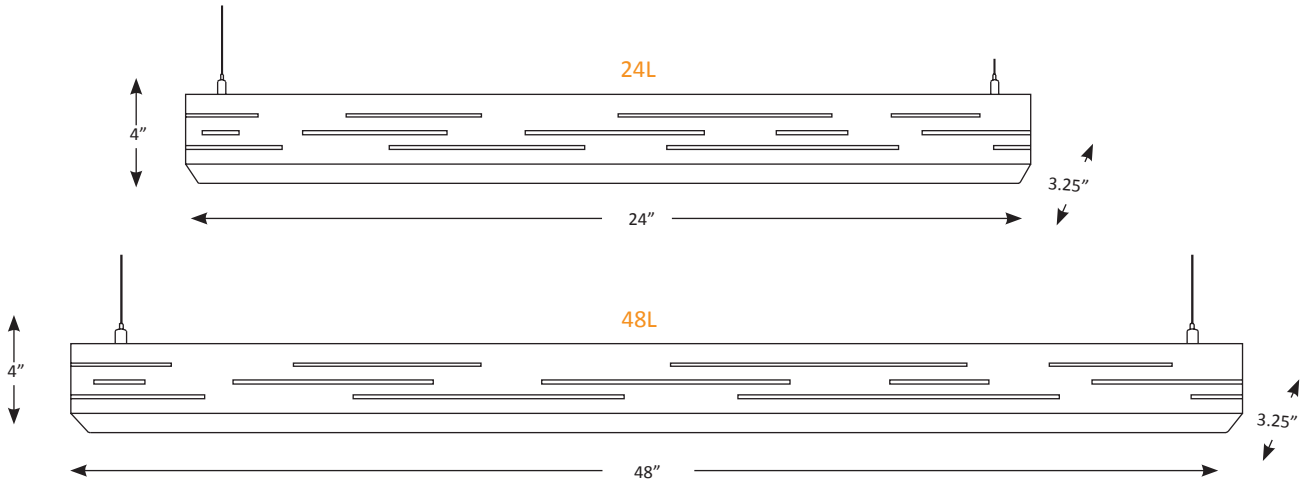


LINE DRAWINGS OF LIGHT SOURCE

2 FOOT FIXTURE

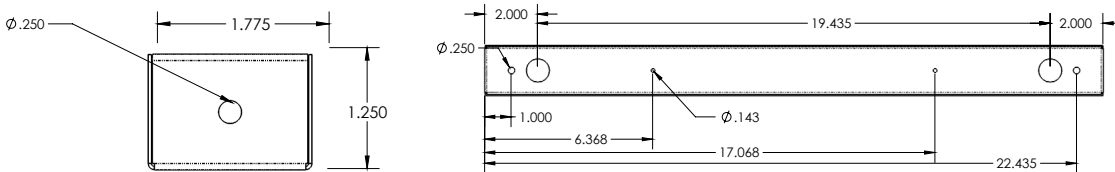

4 FOOT FIXTURE

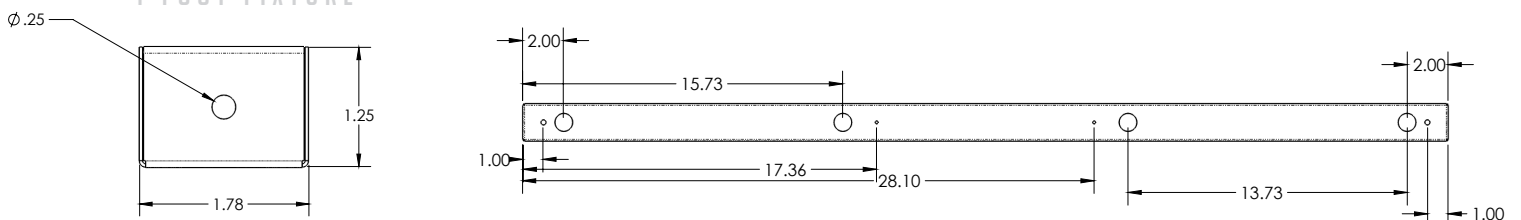

8 FOOT FIXTURE ALSO AVAILABLE - CONTACT FACTORY

*** Specifications subject to change without notice.