

## **AVANTE-GARDE**

### AGAM - Arm Mount

#### **STANDARD FEATURES**

- · Heavy gauge aluminum ballast enclosure
- · Die-cast aluminum guard
- · Heat treated clear glass
- · Extruded aluminum bracket arm
- Incandescent, HID and compact fluorescent sources









SERIES	MODEL	HEIGHT	LAMP	VOLT	LUMENS	CCT	CONTROL	OPTICS	COLOR	MOUNTING	OPTIONS	
AGAM	6000		18W/LED	120-277UNV	2500	4000K	0-10V DIM	0 = NO OPTICS	TEXTURED FINISHES TAL = TEXTURED ALUMINUM TBK = TEXTURED BLACK TBZ = TEXTURED BRONZE TWH= TEXTURED WHITE		NG = NO GUARD MWG = MILK WHITE GLASS^^ RPG = RIBBED PRISMATIC GLASS^^ GEC = GLASS END CAP	
			25W/LED	120-277UNV	2700	4000K	0-10V DIM	SL/F = STACKED LOUVER FORWARD^ SL/B = STACKED LOUVER BACK LIT				
			30W/LED	120-277UNV	3900	3000K	0-10V DIM					
		$\boldsymbol{L} = \text{LARGE}$		347-480UNV	4000	4000K	0-10V DIM					
					4100	5000K	0-10V DIM					
								OPTICS^ PEC = PERFORATED				
			50W/LED	120-277UNV	6075	3000K	0-10V DIM	COLLAR^^^				
				347-480UNV	6300	4000K	0-10V DIM					
					6530	5000K	0-10V DIM					
ORDERING INFORMATION												
SERIES	MODEL	HEIGHT	LAMP	VOLT	LUMENS	CCT	CONTROL	OPTICS	COLOR	MOUNTING	OPTIONS	

^ Not available in incandescent lamps / ^^ Only available with "O" optics / ^^^ Use clear lamp only for striation effect

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- 1. Programmable drivers at the PACE factory
- 2. Color tunable
- 3. Capable of remote dimming
- 4. Can be equipped with motion sensors for on/off functioning
- 5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
- Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used. In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



#### **SIZES**

Small =  $4" \times 7.5"$ Large = 5" x 9"

#### **MOUNTING**


Surface wall mount


#### **COLOR**

Textured or smooth polyester powder coat finishes RAL colors available

#### **PL/HID Downlight**


#### Incandescent up or downlight

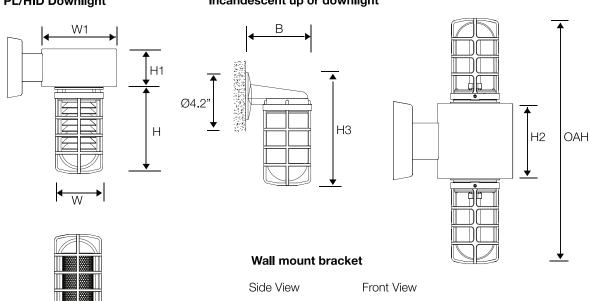



**PL/HID Uplight** 

# 6.5 **▶**1.6"



		W	W1	Н	H1	H2	OAH	НЗ	В
Small		4.0"	5.0"	7.5"	3.0"	5.5"	19.5"	9.0"	5.5"
Large (INC)		5.0"		9.0"		8.0"	26"	12.0"	7.0"
	(PL)	5.0"	7.0"	9.0"	4.0"	8.0"	26"		
	(HID)	5.0"	8.0"	9.0"	4.0"	8.0"	26"		

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.