



# NIMBUS II

## HPII series PENDANT

### STANDARD FEATURES

- Heavy gauge spun aluminum housing
- UV stabilized acrylic reflector
- All hardware stainless steel
- 5 year limited warranty
- Dimming driver(s) 0-10V
- Operating temperatures 40 degrees C/104 degrees F
- Buy American Act
- ETL listed and tested to UL Standard No. 1598 and CSA Listed for damp location indoor location



| SERIES | MODEL | SIZE | VOLT                     | LIGHT SOURCE | LUMENS | CCT  | COLOR  | MOUNTING   | COMMON OPTIONS  | SPECIFIC OPTIONS  |
|--------|-------|------|--------------------------|--------------|--------|------|--|--|---|---|
| HPII   | 500   | 812  | 120-277UNV<br>347-480UNV | 2X PLT 32    | 3840   |      | <b>TAL:</b> Textured Aluminum<br><b>TBK:</b> Textured Black<br><b>TBZ:</b> Textured Bronze<br><b>TWH:</b> Textured White | <b>CBXX:</b> Black Cord & Canopy, Specify Length<br><b>CWXX:</b> White Cord & Canopy, Specify Length<br><b>ACXX:</b> Aircraft Cable & Canopy, Specify Length<br><b>SMXX:</b> Stem & Canopy, Specify Length<br><b>HHCP-BK:</b> Hook Hanger, Black Cord & Plug<br><b>HHCP-WH:</b> Hook Hanger, Black Cord & Plug | <b>CFL:</b> Clear Flat Lens<br><b>PCR:</b> Polycarbonate Refractor<br><b>RMB:</b> Remote Mount Ballast<br><b>EM:</b> Emergency Back-up Power Supply<br><b>DC:</b> Dual Cable Suspension & Curly Cord (FT ONLY)<br><b>OS:</b> Occupancy Sensor** | <b>EMI:</b> Integral, Suspended Back-up Power Supply<br><b>WG:</b> Wire Guard<br><b>SC30:</b> 30 Degree Hang Straight ^^^<br><b>SF:</b> Single Fuse<br><b>PCL:</b> Prismatic Conical Lens ^^^^^<br><b>GDR:</b> Glass Disc & Rod Frame ^^^^^<br><b>PDR:</b> Perforated Disc & Rod Frame ^^^^^<br><b>DBR:</b> Decorative Band & Rod Frame Assembly ^^^^^<br><b>KGD:</b> Konstrukt Frame & Assembly ^^^^^<br><b>KNST:</b> Konstrukt Frame Assembly ^^^^^<br><b>KPD:</b> Konstrukt Frame & Perforated Disc ^^^^^<br><b>KDB:</b> Konstrukt Frame & Decorative Band ^^^^^<br><b>DC:</b> Dual Cable Suspension & Curly Cord<br><b>OS:</b> Occupancy Sensor ***<br><b>BT</b> = Bluetooth sensor<br><b>RD</b> = Remote dimming<br><b>PE</b> = Photocell installed at factory<br><b>MS</b> = Motion sensor<br><b>CC</b> = Coil Cord |
|        |       |      |                          | 2X PLT 42    | 5120   |      |  |  |   |   |
|        |       |      |                          | 35W          | 4500   | 3500 |  |  |   |   |
|        |       |      |                          |              | 4600   | 4000 |  |  |   |   |
|        |       |      |                          |              | 4900   | 5000 |  |  |   |   |
|        |       |      |                          | 50W          | 5200   | 3500 |  |  |   |   |
|        |       |      |                          |              | 5440   | 4000 |  |  |   |   |
|        |       |      |                          |              | 5540   | 5000 |  |  |   |   |
|        |       |      |                          | 70W*         | 8660   | 3500 |  |  |   |   |
|        |       |      |                          |              | 9020   | 4000 |  |  |   |   |
|        |       |      |                          |              | 9120   | 5000 |  |  |   |   |
|        |       | 816  |                          | 2X PLT 32    | 3840   |      |  |  |   |   |
|        |       |      |                          | 2X PLT 42    | 5120   |      |  |  |   |   |
|        |       |      |                          | 4X PLT 32    | 7680   |      |  |  |   |   |
|        |       |      |                          | 4X PLT 42    | 10240  |      |  |  |   |   |
|        |       |      |                          | 35W          | 4500   | 3500 |  |  |   |   |
|        |       |      |                          |              | 4600   | 4000 |  |  |   |   |
|        |       |      |                          |              | 4900   | 5000 |  |  |   |   |
|        |       |      |                          | 50W          | 5200   | 3500 |  |  |   |   |
|        |       |      |                          |              | 5440   | 4000 |  |  |   |   |
|        |       |      |                          |              | 5540   | 5000 |  |  |   |   |
|        |       |      |                          | 70W*         | 8660   | 3500 |  |  |   |   |
|        |       |      |                          |              | 9020   | 4000 |  |  |   |   |
|        |       |      |                          |              | 9120   | 5000 |  |  |   |   |

\* Active cooling US patent number 8,708,530 B2 / \*\* Available only on HPAL and HPGL models / \*\*\* Available only with PDR, DBR, KGD, KPD, and KDB  
 ^^^ Available for stem mounting only / ^^^^^ Not available with frame assemblies / ^^^^^ Standard chrome finish. Available in a brushed aluminum or black finish

### ORDERING INFORMATION

| SERIES | MODEL | SIZE | VOLT | LIGHT SOURCE | LUMENS | CCT | COLOR | MOUNTING | COMMON OPTIONS | SPECIFIC OPTIONS |
|--------|-------|------|------|--------------|--------|-----|-------|----------|----------------|------------------|
|        |       |      |      |              |        |     |       |          |                |                  |

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used. In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



**PACE**  
ILLUMINATION

## NIMBUS II

HP II series PENDANT

### SIZES



Small = 14.911 diameter  
Medium = 18.7" diameter  
Large = 24.811 diameter

### MOUNTING


Air craft cable and cord standard

### COLOR

Textured or smooth polyester powder coat finishes RAL colors available

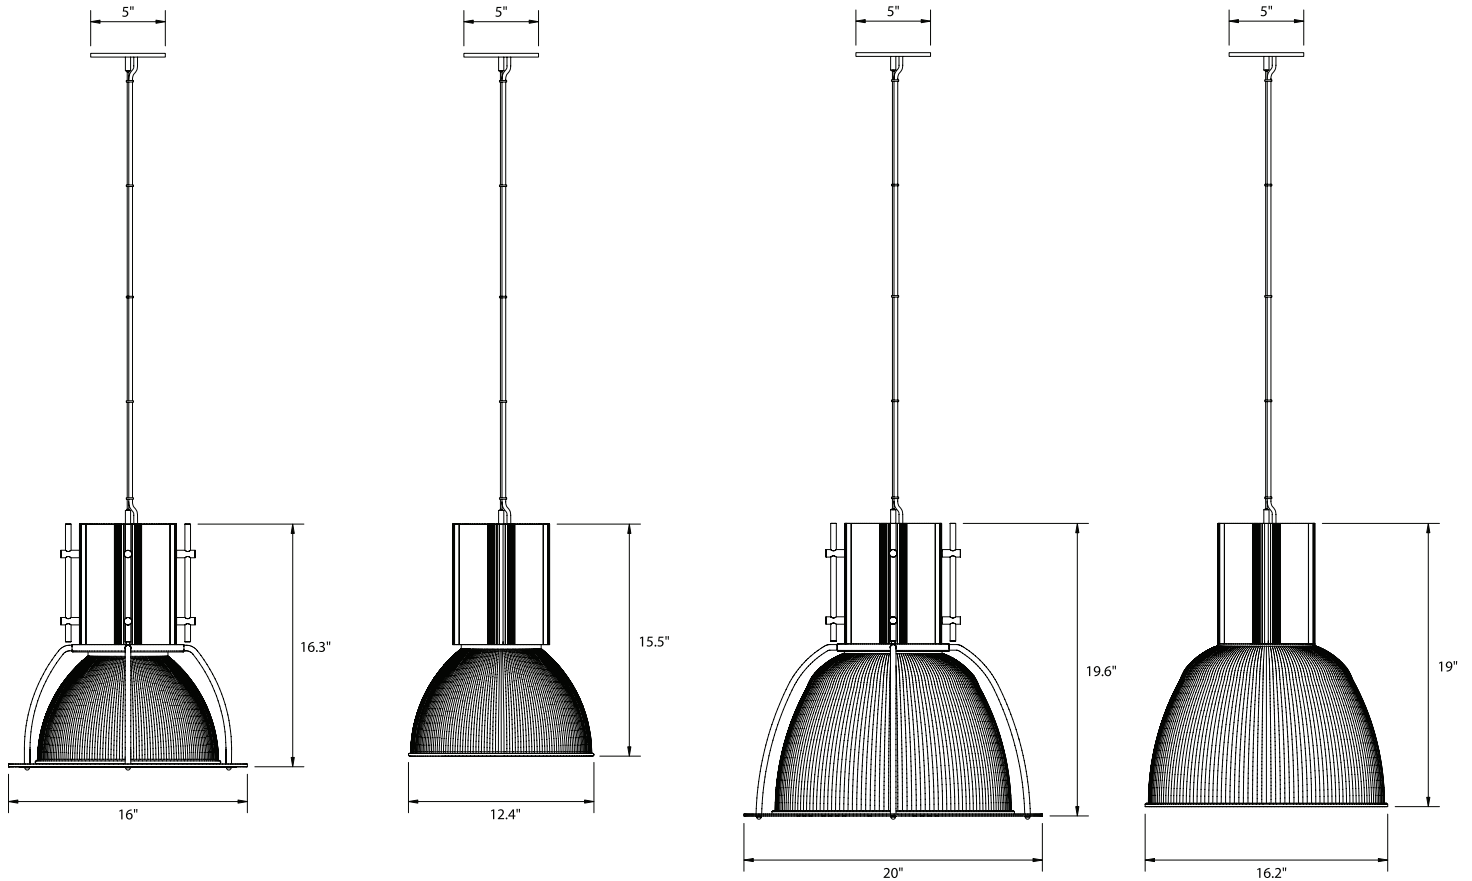

**FGL = Frosted  
Glass Lens**



**PERF = Perforated  
Disc**

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.