

Fixture Number					
Project Title		Type		Qty	
Comments					

- White Acrylic Cylinder Diffuser & Bottom Lens
- Top & Bottom Metal Rings
- Vertical Metal Accents
- Center Stem to 45° Swivel Canopy
- Chain Hung Option Available

Dimensions and Lamping:

C515-8	12" A x 16" B x 8" C	Weight: 8 lbs.
LN	LED: Nominal 15W, 1100 Delivered Lumens	
C515-10	14" A x 18" B x 10" C	Weight: 9 lbs.
LN	LED: Nominal 15W, 1100 Delivered Lumens	

LED Color Temperature:

35K	3500K	30K	3000K	40K	4000K
------------	-------	------------	-------	------------	-------

Control:

CLV: Integral Power Supply, 0-10V Dimming to 1%
CPC: Integral Phase Cut Dimming Power Supply (120V Only)

Voltage:

1	120V	2	277V	MV	Multi-Volt
----------	------	----------	------	-----------	------------

Diffusers:

WA	Gloss White Acrylic
WM	Matte White Acrylic

Standard Finishes:

PAL	Aluminum	PSB	Satin Black	PRD	Traffic Red (RAL 3020)
PNL	Nickel	PBB	Brushed Brass	POR	Pure Orange (RAL 2004)
PBR	Bronze	PAB	Antique Brass	PYL	Traffic Yellow (RAL 1023)
PLB	Light Bronze	PHB	Hammered Bronze	PGR	Emerald Green (RAL 6001)
PMB	Medium Bronze	PHC	Hammered Copper	PBL	Signal Blue (RAL 5005)
PDB	Dark Bronze	PHS	Hammered Silver	STBD	To Be Determined
PRB	Oil Rubbed Bronze	PSG	Satin Gold		
PMW	Matte White	PPA	Patina		

Premium Finishes:

BA	Brushed Aluminum	PB	Polished Brass
SN	Satin Nickel	AB	Antique Brass
PC	Polished Chrome	PTBD	To Be Determined
BB	Brushed Brass		

Hanging Options:


ST	Stem	CH	Chain Hung with Power Cord
-----------	------	-----------	----------------------------

Other Options:

REM	Remote Emergency Power Supply
------------	-------------------------------



C515 | Delaware

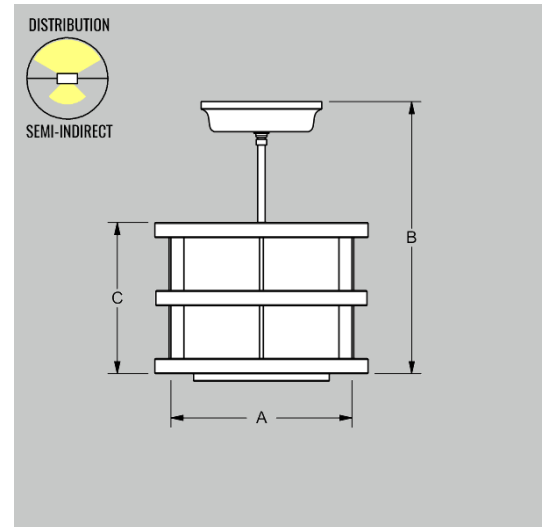

Notes:

- Custom sizes and finishes available upon request.
- Camman reserves the right to make design changes without prior notice.
- Mounting is to a 4 inch octagonal junction box.
- Photometric information is available at cammanlighting.com