

Fixture Type	Lamp Type	APPROVAL
Job Ref. / Location		



### STANDARD FEATURES

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- New York City approved 8" exit letters.
- Ultra bright, long life red LED exit illumination.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.
- UL Listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### OPTIONAL FEATURES

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Tamper-proof hardware (TP) helps discourage unauthorized access to the unit.
- Dual circuit option (2C) on the AC-only unit enables it to be connected to two different supplies at the same time.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


## SERIES LDXNYC

### New York City Compliant

### LED Diecast Aluminum Exit



Listed  
Damp Location

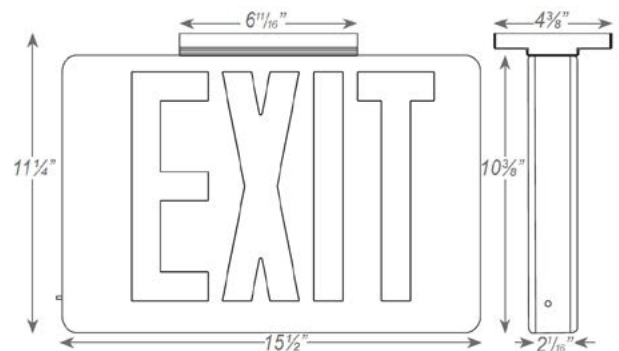

### How to Order:

--

Finish	Model	Number of Faces	Letter Color	Options
Blank = Black Frame/ Brushed Alum. Face <b>W</b> = All White <b>B</b> = All Black	<b>LDXNYC</b> = AC only <b>LDEXNYC</b> = Battery Backup	<b>1</b> = Single Face <b>2</b> = Double Face <b>U</b> = Universal Single/ Double Face	<b>R</b> = Red	<b>SDT</b> = Self-Diagnostic <b>TP</b> = Tamperproof <b>2C</b> = Dual Circuit*

\* Available on "AC Only" Models

All products are manufactured in accordance with U.L. standard 924. All Pathway® products meet or exceed requirements as established by the National Electrical Code. Specifications subject to change without notice.



Pathway Lighting Products, Inc., P.O. Box 591, Old Saybrook, CT 06475-0591  
voice 800.342.0592 • fax 800.207.0090 • www.pathwaylighting.com • e-mail: sales@pathwaylighting.com

EX21.0

CLCBMC