

Fixture Type	Lamp Type	APPROVAL
Job Ref. / Location		



### STANDARD FEATURES

- Field selectable knockout Chevron directional indicators.
- New York City approved 8" exit letters.
- Ultra bright, long life red LED exit illumination.
- Durable powder-coated 20 gauge steel housing in white or black finish.
- UL Listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING


- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## SERIES LEXNYC

### New York City Compliant LED Exit



Listed  
Damp Location

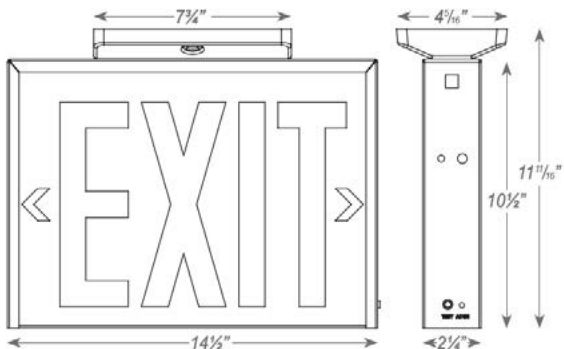

#### How to Order:

--

Finish	Model	Number of Faces	Letter Color
Blank = All White B = All Black	LXNYC = AC only LEXNYC = Battery Backup	1 = Single Face 2 = Double Face U = Universal Single/Double Face	R = Red

All products are manufactured in accordance with U.L. standard 924. All Pathway® products meet or exceed requirements as established by the National Electrical Code. Specifications subject to change without notice.



Pathway Lighting Products, Inc., P.O. Box 591, Old Saybrook, CT 06475-0591  
voice 800.342.0592 • fax 800.207.0090 • www.pathwaylighting.com • e-mail: sales@pathwaylighting.com

EX22.0