
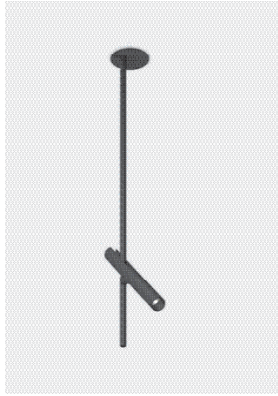


Date: _____ Customer: _____

Project: _____

Type: _____ Qty: _____

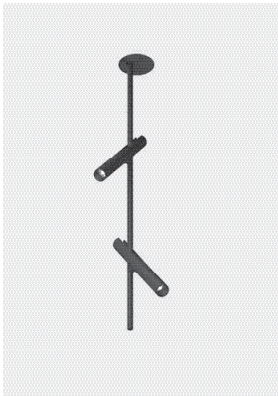

kreon esprit is an elegant and simple spotlight luminaire that seeks to cast a perfect pool of light. LED light sources are contained within light projecting cylinders available as a ceiling mount, pendant and floor standing. Each provide a fully rotational and adjustable movement for the heads to enable total flexibility when directing light. Remote positioned control gear is located above the ceiling void and can operate with single or twin headed models.

Construction

Luminaire

Made from high-pressure die cast aluminum. Surface treatment by powder-coated.

Finishes

- White (RAL xxx)
- Black (RAL xxx)

Mounting Option

- Ceiling Mount
- Pendant Mount (see other spec sheet)
- Floor Standing (see other spec sheet)

Classifications

- Ingress Protection – IP65

Electrical Characteristics

LED Specification

Cree LED.

LED Life


L70 greater than 60,000 hours.

Correlated Color Temperature (CCT)

- Available in 2700K
- CRI 80+ or CRI 90+

Gear

Standard 120V driver

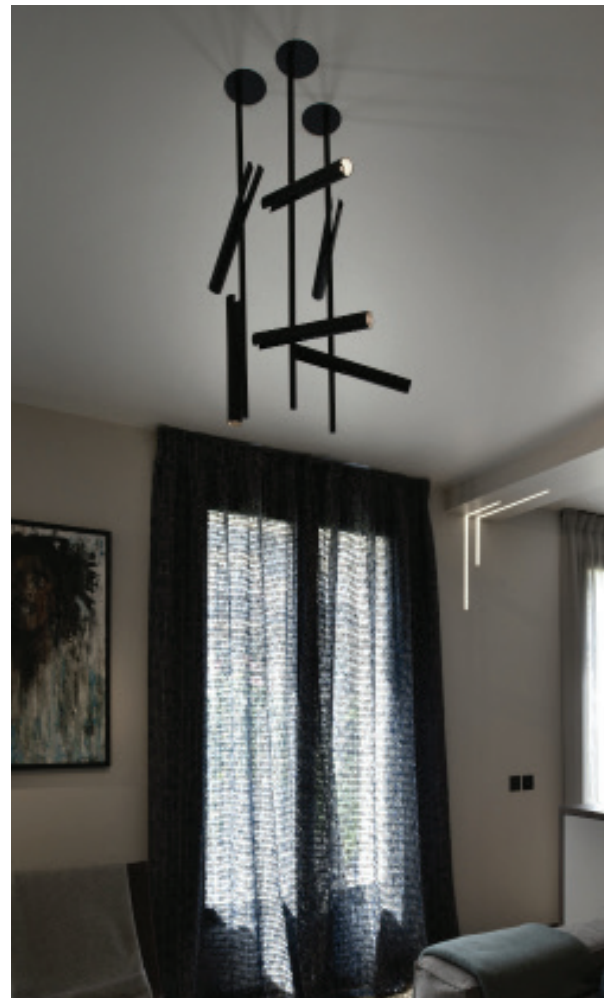

Esprit Ceiling– Elegant Interior Spotlight Luminaire



kreon

Ordering Codes

KU__ -	__ -	__ -	80 -	__ -	RM -	__ -	_____
KREON ESPRIT MOUNT	LUMINAIRE HEADS	LIGHT SOURCE AND CCT*	CRI	FINISH COLOR*	ELECTRIC GEAR	PLASTERKIT	OPTIONAL ACCESSORIES (USE ALL THAT APPLY, BLANK FOR NONE)
ESC – Ceiling	01 – Single 02 – Double	27 – 2700K 30 – 3000K	80 – 80+ min CRI 90 – 90+ min CRI	BLK – Black WH – White	RM – Remote dimming	PL – trimless plasterkit PLSH – trimless plasterkit with shadow gap	OF3 – 700mA, ON/OFF 3W OF2 – 700mA, ON/OFF 20W D2 – 0-10V dim (10%) D3-2W – Lutron Hi-Lume dim to 1% (2 wire forward phase, 120V) D3-3W – Lutron Hi-Lume dim to 1% (3 wire 120/277V) D3-ECO – Lutron Hi-Lume dim to 1% soft-on, faded-to-black (5 wire 120/277V) D4 – EldoLED dim to dark

Ordering Example: KUESC-02-27-80-BLK-INT-LTF

* Consult factory for other options

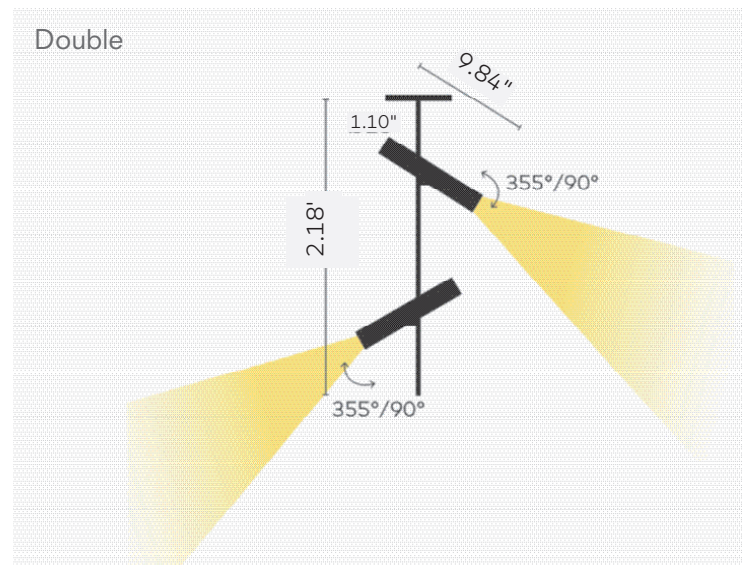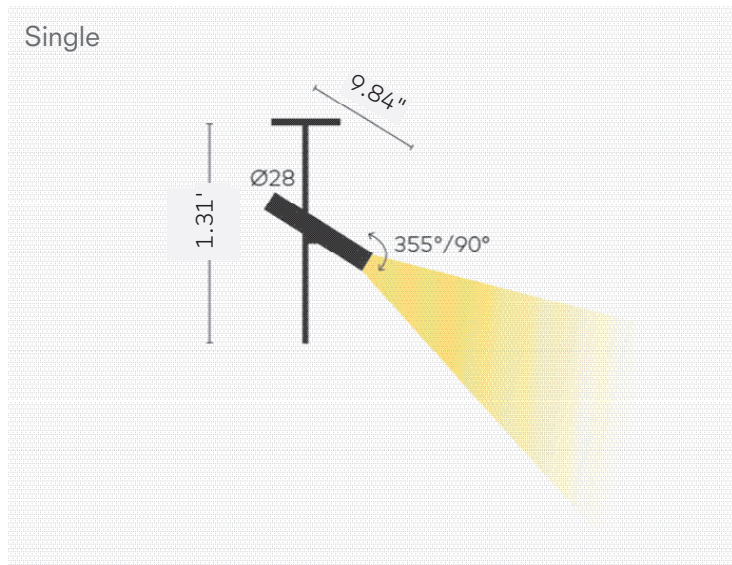

Additional Accesories

Plasterkit

